


Johnson High Torque DC Geared Motor 300RPM with Driver - Grade A

Technical drawing of a 100mm diameter ball valve. The drawing shows a top view of the valve body with a central ball and six screws. Dimensions are indicated: overall diameter is 100mm, ball diameter is 60mm, and the distance from the center of the ball to the edge of the valve body is 24mm. The drawing is labeled with '100' and '60'.

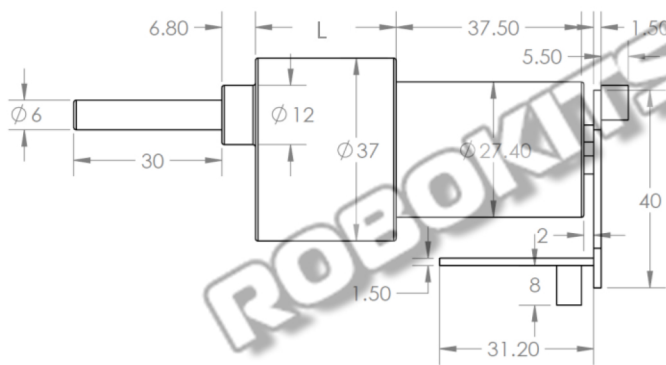


10RPM	L=28.5mm
30RPM	L=28.5mm
60RPM	L=26.5mm
100RPM	L=26.5mm
200RPM	L=25mm
300RPM	L=25mm
600RPM	L=22mm
900RPM	L=22mm

Motor Type	High Torque DC Geared Motor
Operating voltage	12V DC
Motor Speed at Output Shaft (RPM)	300RPM
Stall Torque(Kgcm)	9.06Kgcm
Rated Torque(Kgcm)	3.6Kgcm
Gear Ratio	1 : 60
Weight	180gm

Support	UART / I2C / PPM / Analog Signal
GND	Black
SCL / PPM / Analog	Brown
SDA / Analog Sense	Red
UART TXD	Orange
UART RXD	Yellow
V+	Green

Nominal voltage(V)	12V
No-Load Speed (RPM)	18000
Rated Torque (gcm)	151
No-load current (A)	0.8A
Load current(A)	up to 7.5 A(Max)

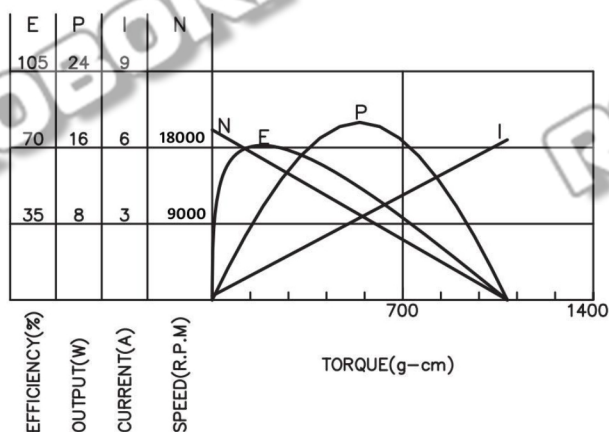

Base Motor Characteristic Graph

