


09/07/2026


- Smallest chapter
- 1 math
- 40 pins in 8085

4 port input/output

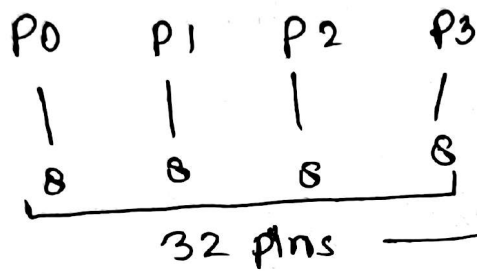

1 → Ground
2 → VCC

2 pins → 34 pins



Port 0 ~ Pin 3

P0 → carries lower of the 16 bits (A0-A7)
P2 → carries upper of the 16 bits (A8-A15) → carries address

P1 → normal I/O

P3 → special port (provides interrupt)

8051
pin diagram

RST pin → 35th pin

18-19 pins: XTAL2, XTAL1 → 36-37th pins

↳ denotes frequency

38th pin → EA → Enable pin
PLEN
ALE → Address Latch Enable (0/1)

RESET (not needed)

input pin [ACTIVE high]
normally low

EA (external access)

must be connected to VCC or GND

When $V_{CC} \rightarrow$ saved data in ROM

When GND $\rightarrow$ saved data in external memory

 data

PSEN (program store enable)


output pin $\rightarrow$ connected to OE of the ROM

ALI

$\hookrightarrow$ when = 0 it provides $D0-D7 \rightarrow$ data
 when = 1 " " " " $A0-A7 \rightarrow$ address $\left. \vphantom{\begin{matrix} D0-D7 \\ A0-A7 \end{matrix}} \right\} P0 \& P2$

~~#~~ Intel HEX file

- loading of executable program in ROM chip
- OH $\rightarrow$ object to hex file

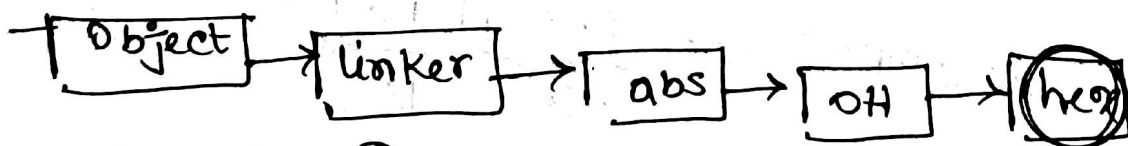

Hex file की क्या?

- num of bytes to be loaded
- data
- starting address of info's placement

