

EWTCP

1. for every RTT increase w_o by α
2. for every loss decrease w_o by $\frac{w_o}{2}$

$$n \quad \alpha = \frac{1}{\sqrt{n}}$$

total window growth $\alpha^2 = \frac{1}{n}$


$$n \times \frac{1}{n} = 1$$

MPTCP Schedulers

min-RTT Schedulers

→ it picks a path which
has less RTT


5MB

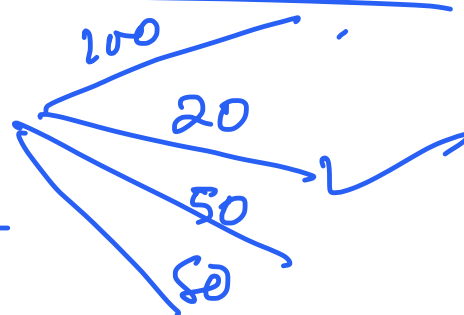

① It should be dynamic

② Not only RTT, use other metrics
such as packet loss, BW

~~P~~ F Amount of data to be transfered

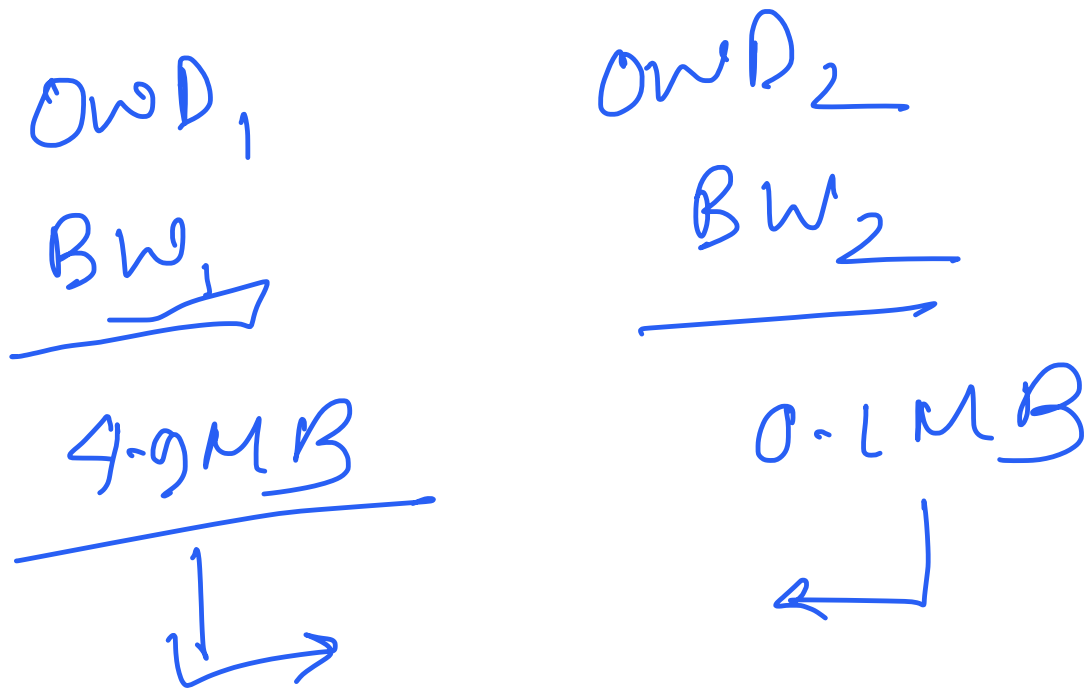

Re-Interception: - After sending data over one subflow, the scheduler decides to send the same over the other subflow, we tell it is being re-intercepted.

