

WAVELENGTH

VOLUME 3

TAJ FLOORING
GLOBAL MANUFACTURING, LOCAL SERVICING

FEATURED PRODUCT / TAJ-6512D ARGENT

**MODULAR ACOUSTIC
FLOORING**

5MM LVT

PLANK & TILE

FOR RAISED ACCESS USE

COMMERCIAL FLOORING



TAJ-6573D SESAME

WAVELENGTH MODULAR ACOUSTIC FLOORING

The Wavelength Modular Acoustic Flooring collection harmonizes performance and design through a modern interpretation of texture, tone, and sound. Crafted as a 5mm luxury vinyl acoustic solution, Wavelength transforms commercial interiors with a balance of aesthetic warmth and technical precision.

Each design, ranging from expressive wood visuals to soft textile-inspired textures, creates an atmosphere that feels both grounded and dynamic. The collection’s fiberglass-reinforced construction delivers dimensional stability and long-term durability, while its acoustic backing absorbs sound and enhances comfort underfoot.

With a palette that transitions seamlessly across spaces, Wavelength offers the flexibility and refinement needed for today’s adaptive environments—from hospitality and healthcare to corporate and multi-family interiors.

FEATURES & BENEFITS

commercial warranty

sound absorption

raised access

comfort & safety

easy care

protech+ wear layer finish



TAJ-6524D SHABBY CHIC

WOOD

SIZE: 7" x 48" PLANKS

Rooted in authenticity and designed for comfort, the Wavelength wood visuals evoke the essence of natural craftsmanship with a contemporary sensibility. Each 5mm modular plank captures the organic depth of woodgrain—subtle variations, tactile textures, and nuanced hues that bring a sense of warmth and familiarity to commercial interiors.



TAJ-6573D Sesame



TAJ-6574D Cashew



TAJ-6525D Chia



TAJ-6526D Buckwheat



TAJ-6527D Oat



TAJ-6575D Turbinado



TAJ-6576D Molasses



TAJ-6524D Shabby Chic



TAJ-6516D Sharkskin



TAJ-6512D Argent



TAJ-6517D Sable



TAJ-6523D Cinder



TAJ-6513D Smoke

TRAVERTINE

A traditional flooring material that incorporates contemporary elements, Travertine offers a natural look for commercial interiors. Modest accents of metallics throughout these neutral tones add a modern touch to a classic design element.

SIZE: 12" x 24" TILES



TAJ-2801C Pearl



TAJ-6521C Fawn



TAJ-6520C Storm



TAJ-6521C FAWN

FILO

Filo, meaning "thread," is a design representative of its name. This intricate crosshatch design embodies a textile aesthetic with the durability and cleanability of luxury vinyl, making it ideal for a wide range of commercial end-use applications.

SIZE: 12 x 24" TILES




TAJ-6560C Gauze



TAJ-6561C Ripstop



TAJ-6562C Duck

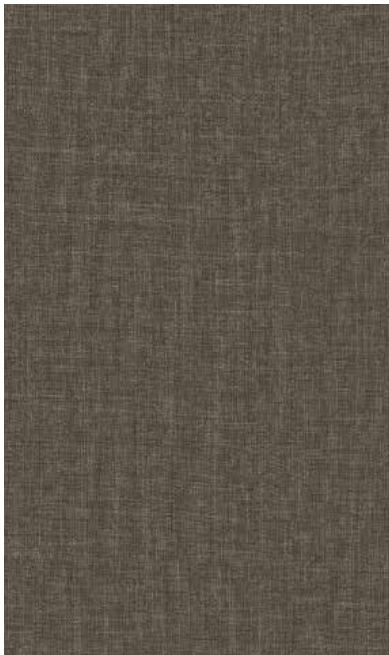

TAJ-6563C Burlap



TAJ-6564C Denim




RANDOM PATTERN:
TAJ-6560C GAUZE
TAJ-6561C RIPSTOP
TAJ-6562C DUCK

MONTAGE

Inspired by interwoven layers, Montage is a distinctive arrangement of elements that forms a continuous design. Available as a large-format tile, its neutral tones, yet intricate and collective visual of stone, concrete, and textile, provide interiors with a soft and sophisticated canvas.

SIZE: 36" x 36" TILES

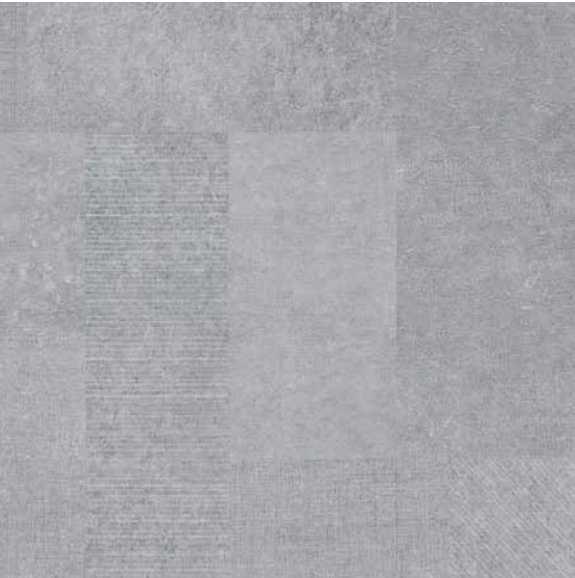

TAJ-6570N Shadow



TAJ-6571N Cameo



TAJ-6572N Ore



TAJ-6571N CAMEO



TAJ-6570N SHADOW

TECHNICAL DATA

Wavelength Modular Acoustic Flooring is a high-performance 5mm fiberglass-reinforced modular acoustic flooring product with a non-slip backing. This advanced modular construction enables multiple installation options for varied commercial end-use applications. Wavelength is suitable for use over raised access floor panels, as it is excellent for limiting sound transmission, and can be installed next to carpet tile without the need for transition strips.

PRODUCT DETAILS

Overall Thickness	5MM
Wear Layer Thickness	20MIL
Wear Layer & Finish	High Molecular Weight Polymerized Vinyl with Protech Plus Finish
Warranty	20 Year Commercial
Edge Detail	Square Edge (no bevel)

ASTM TESTING RESULTS

Classification	ASTM F1700 Class III Type B (embossed)
ASTM E648 Fire Assistance	Class 1 > 0.45
ASTM E662 Smoke Density	< 450, Flaming/Non-Flaming
ASTM F970 Static Load	Passes at 1,000 psi, Residual Compression Maximum 0.005"
ASTM C1028-89 Slip Resistance	> 0.6 per ADA
ASTM F925 Chemical & Stain	Excellent; No surface dulling, surface attack, or color change with 5% acetic acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.
ASTM E492 Impact Sound Conduction	IIC 57
ASTM E90 Airborne Sound Transmission Loss	STC 62
FloorScore® Certified	Yes
LEED	Low Emitting Adhesives IEQ4.1, Low Emitting Coatings IEQ4.2, Low Emitting Material
Recycled Content	Post Consumer and Post Industrial Recycled Content Present. Contact us for more information regarding recycled content and detail on Health and Environmental Product Declarations.

Installation: Apply with recommended adhesive referenced in the full technical specification.

Maintenance: Requires no wax, no stripping, no buffing or the use of toxic chemicals.

Manufacturing Plant Certifications: ISO 14001, ISO 9001

Trade Agreements Act (TAA) Compliant



Scan to access the full technical specification information including installation and maintenance guides.



Color and shading of product images to sample may vary. Viewing actual samples is recommended.

MIX & MATCH COLLECTIONS

With hundreds of designs across TAJ's portfolio, the Wavelength Modular Acoustic Flooring collection can be effortlessly paired with additional 5mm modular acoustic offerings, including 2-3-5 Luxury Vinyl Plank & Tile and Color Infused Modular Acoustic Flooring. Together, these collections provide an expansive range of colors, patterns, and formats—allowing you to create cohesive transitions between spaces or mix coordinating designs for a truly distinctive visual experience.

2-3-5 LUXURY VINYL PLANK & TILE



Available in 2MM, 3MM and 5MM thicknesses, the **2-3-5 Luxury Vinyl Plank & Tile** collection features innovated modern visuals that embrace the elements of our natural surroundings.

VIEW THE COLLECTION



COLOR INFUSED MODULAR ACOUSTIC FLOORING



Color Infused, a collection of 5mm modular acoustic flooring available in three unique patterns and eight bold colorways.

VIEW THE COLLECTION





TAJ-6527D OAT



FLOORING INSTALLATION INSTRUCTIONS

TAJ MODULAR ACOUSTIC FLOORING

Intended for TAJ Flooring Modular Acoustic 5MM LVT Collections



If the concrete is contaminated with any type of sealer, hardener, curing membrane, paint, oil, grease, adhesives, and any other type of penetrating material it should be removed thoroughly by bead blasting. Sanding is not adequate, and chemicals should not be used to accomplish removal. After concrete preparation has been completed, sweep and vacuum surface thoroughly to remove all miscellaneous dirt and contaminants. It is possible that joints of existing resilient flooring may telegraph through tiles. This is a common occurrence and is not a product defect.

Approved Substrates:

Suitable substrates include properly prepared concrete, portland-based underlayments, properly prepared lightweight concrete (primed with universal primer), minimum 3/8" APA graded smooth sanded plywood, terrazzo (properly prepared with all waxes and surface finishes removed), concrete radiant heated subfloors that do not exceed 85° F. Particleboard, chipboard, flake board, hard board and gypsum based underlayments ARE NOT suitable substrates for installation of vinyl flooring. Contact TAJ Flooring for recommendations regarding all other types of substrates.

Hospital Beds:

If TAJ Modular Acoustic Flooring is to be used in patient rooms the area under the beds must be installed using the recommended Eco Bond Adhesive System. No substitutions. This adhesive will tolerate point loads within 4 hours of installation.

Layout:

Establish chalk guidelines, which are at right angles to each other from which the tile/planks are to be laid. Measure the area to find the best starting point for maximum size perimeter cuts.

If installed over raised access panels, layout tiles to cover the seam of the access floor panel first.

Installation:

Before beginning Installation check actual boxes of all tiles/planks to be sure that correct color, pattern, and quality has been shipped for your specific installation. Do not mix dye lots in the same area.

- Observe face and back of all tiles or planks to be sure there is no damage or defects. Do not install or glue tile with visible defects. Tiles or planks that may have minor defects on one side or at edges can be used for trimming and fitting at walls and columns.
- Lay tiles or planks starting at the center of the room working towards the walls. Lay out following the directional arrows on back of tiles turning each tile 90 degrees to the adjacent tile to gain uniformity of color and pattern.
- The perimeter tile or planks must be cut up to the wall from the field tile or plank. The perimeter tile or planks should be accurately scribed against the wall and any projections coming out from the walls. Cut product from the face side with a sharp knife. Do not pressure fit tiles. Keep foot traffic off laid area while installing to prevent shifting.
- Install material with TAJ Modular spray adhesive system following the instructions on the container label or TAJ trowel applied adhesives using the appropriate trowel notch design called out on the adhesive container label. Releasable bond with TAJ-1095 is achieved using 3/8" short nap roller for adhesive application.
- When installing over radiant heated subfloors, turn the heat off for 24 hours before during and after installation. Failure to turn the floor heat off may result in a shortened working time of the adhesive. After 24 hours following installation, turn the system back on raising it incrementally not to exceed a change of more than 5 degrees per hour to a maximum of 85 degrees F. All previously mentioned material acclimation requirement must be followed.
- Please note and follow complete instructions found on adhesive containers.

TECHNICAL SPECIFICATION

TAJ Wavelength Modular Acoustic Flooring



Wavelength Modular Acoustic Flooring is a fiberglass reinforced heterogeneous modular floor tile with a factory applied nonslip backing. Wavelength is manufactured with high molecular weight polymerized wear layer which is supported by high strength vinyl backing. The modular tile is sealed with Protech Plus® UV cured, ceramic bead infused polyurethane finish which enhances ease of maintenance and provides antimicrobial performance. Modular Acoustic Flooring is engineered to contribute to quiet environments and limit sound transmission without the need for acoustical underlayment.



PRODUCT DETAILS				
Overall Product Thickness	5.0MM	Dimensions	Plank: 7" x 48"	Tile: 12" x 24", 36" x 36"
Wear Layer	0.5MM (20mil)	Pieces per Carton	7" x 48": 10 planks	12" x 24": 10 tiles 36" x 36": 4 tiles
Warranty	20 Year Commercial	SQ FT per Carton	7" x 48": 23.33 sq ft	12" x 24": 20 sq ft 36" x 36": 36 sq ft

Test Results Data: The following data is supported by independent testing companies. Copies of test results are available upon request.

TEST	RESULT
ASTM F1700 Product Classification	Class III, Type A (smooth), Type B (embossed)
ASTM E648 Fire Resistance	Class 1 > 0.45
ASTM E662 Smoke Density	< 450, Flaming/Non-Flaming
ASTM F970 Static Load	1000 psi
ASTM C1028-89 Slip Resistance	> 0.6 per ADA
ASTM E492 Impact Sound Conduction	IIC 57
ASTM E90 Airborne Sound Transmission	STC 62
Chemical & Stain Resistance	Excellent
VOC Emission	Negligible
FloorScore® Certified	Yes
LEED	MR4, IEQ4.1, IEQ4.3
Recycled Content	42% post-consumer, 28% pre-consumer



Scan or [click here](#) to access technical information including full warranty, installation and maintenance guides, certifications and more.

Installation: Inspect subfloor surfaces carefully to determine acceptability. All TAJ flooring products must be installed under proper site conditions. Prior to installation, reviewing our Installation Instructions guide is strongly advised.

Approved Adhesives:

- **TAJ Eco Bond Spray Adhesive:** Maximum 8.0 lbs. MVER (Moisture Vapor Emission Rate) per 1,000 sf per 24 hours as tested by ASTM F1869 or maximum RH (Relative Humidity) of 95% as tested by ASTM F2170. Test pH of concrete – pH should be 11 or less as tested by ASTM F710.
- **TAJ-1095 Adhesive:** Maximum 10.0 lbs. MVER per 1,000 sf per 24 hours as tested by ASTM F1869 or maximum RH of 95% as tested by ASTM F2170. Test pH of concrete – pH should be from 5-12.

TECHNICAL SPECIFICATION

TAJ Wavelength Modular Acoustic Flooring



Protection: Although not required, the use of high-quality floor finishes will further protect the floor in heavy traffic areas. Chair and table legs should be capped with the proper floor protection glides.

Maintenance: Use of quality floor finishes is not required. If a flooring finish is desired, the use of a floor finish will further protect the floor in heavy traffic areas. Chairs and table legs should be capped with metal swivel glides. See detailed Maintenance Instructions.

Plant Certifications: ISO14001, ISO9000



Scan or [click here](#) to view this collection online and to order samples, or to contact our team for more information and assistance.



TECHNICAL SPECIFICATION

TAJ Wavelength Modular Acoustic Flooring



Wavelength Modular Acoustic Flooring is a fiberglass reinforced heterogeneous modular floor tile with a factory applied nonslip backing. Wavelength is manufactured with high molecular weight polymerized wear layer which is supported by high strength vinyl backing. The modular tile is sealed with Protech Plus® UV cured, ceramic bead infused polyurethane finish which enhances ease of maintenance and provides antimicrobial performance. Modular Acoustic Flooring is engineered to contribute to quiet environments and limit sound transmission without the need for acoustical underlayment.



PRODUCT DETAILS				
Overall Product Thickness	5.0MM	Dimensions	Plank: 7" x 48"	Tile: 12" x 24", 36" x 36"
Wear Layer	0.5MM (20mil)	Pieces per Carton	7" x 48": 10 planks	12" x 24": 10 tiles 36" x 36": 4 tiles
Warranty	20 Year Commercial	SQ FT per Carton	7" x 48": 23.33 sq ft	12" x 24": 20 sq ft 36" x 36": 36 sq ft

Test Results Data: The following data is supported by independent testing companies. Copies of test results are available upon request.

TEST	RESULT
ASTM F1700 Product Classification	Class III, Type A (smooth), Type B (embossed)
ASTM E648 Fire Resistance	Class 1 > 0.45
ASTM E662 Smoke Density	< 450, Flaming/Non-Flaming
ASTM F970 Static Load	1000 psi
ASTM C1028-89 Slip Resistance	> 0.6 per ADA
ASTM E492 Impact Sound Conduction	IIC 57
ASTM E90 Airborne Sound Transmission	STC 62
Chemical & Stain Resistance	Excellent
VOC Emission	Negligible
FloorScore® Certified	Yes
LEED	MR4, IEQ4.1, IEQ4.3
Recycled Content	42% post-consumer, 28% pre-consumer



Scan or [click here](#) to access technical information including full warranty, installation and maintenance guides, certifications and more.

Installation: Inspect subfloor surfaces carefully to determine acceptability. All TAJ flooring products must be installed under proper site conditions. Prior to installation, reviewing our Installation Instructions guide is strongly advised.

Approved Adhesives:

- **TAJ Eco Bond Spray Adhesive:** Maximum 8.0 lbs. MVER (Moisture Vapor Emission Rate) per 1,000 sf per 24 hours as tested by ASTM F1869 or maximum RH (Relative Humidity) of 95% as tested by ASTM F2170. Test pH of concrete – pH should be 11 or less as tested by ASTM F710.
- **TAJ-1095 Adhesive:** Maximum 10.0 lbs. MVER per 1,000 sf per 24 hours as tested by ASTM F1869 or maximum RH of 95% as tested by ASTM F2170. Test pH of concrete – pH should be from 5-12.

TECHNICAL SPECIFICATION

TAJ Wavelength Modular Acoustic Flooring



Protection: Although not required, the use of high-quality floor finishes will further protect the floor in heavy traffic areas. Chair and table legs should be capped with the proper floor protection glides.

Maintenance: Use of quality floor finishes is not required. If a flooring finish is desired, the use of a floor finish will further protect the floor in heavy traffic areas. Chairs and table legs should be capped with metal swivel glides. See detailed Maintenance Instructions.

Plant Certifications: ISO14001, ISO9000



Scan or [click here](#) to view this collection online and to order samples, or to contact our team for more information and assistance.





VISUALIZER

WAVELENGTH MODULAR ACOUSTIC FLOORING | 5MM

FAWN

Fawn of the Wavelength Modular Acoustic Flooring collection is a 5mm luxury vinyl acoustic solution for commercial interior spaces. This luxury vinyl tile design offers sound absorption benefits, a non-slip loose lay backing, and the durability and performance of fiberglass reinforced vinyl.

This product is included in our latest **Swatch Kit: Top Designs & Colorways**. [Check out the 25 featured designs >](#)

SKU: TAJ-6521C

Size: 12" x 24"



Format/Category : Slab

Thickness: 5MM

Color: Brown, Metallic, Red

Pattern/Design: Metallic, Stone

Features: Access Flooring, Acoustic Solutions, ASTM E84, Phthalate Free

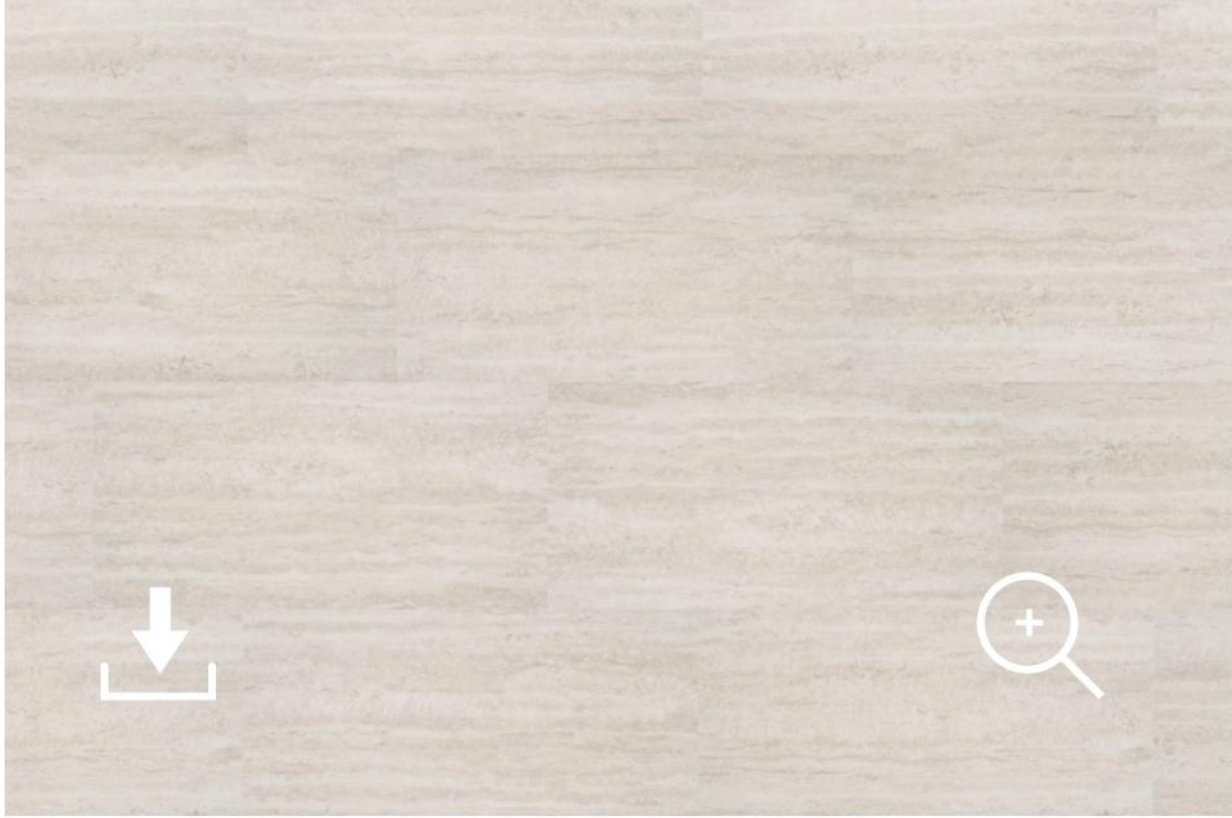

VISUALIZER

WAVELENGTH MODULAR ACOUSTIC FLOORING | 5MM

PEARL

Pearl of the Wavelength Modular Acoustic Flooring collection is a 5mm luxury vinyl acoustic solution for commercial interior spaces. This luxury vinyl tile design offers sound absorption benefits, a non-slip loose lay backing, and the durability and performance of fiberglass reinforced vinyl.

SKU: TAJ-2801C

Size: 12" x 24"

Format/Category : Slab

Thickness: 5MM

Color: Cream/Beige, Metallic

Pattern/Design: Metallic, Stone

Features: Access Flooring, Acoustic Solutions, Application Versatility, Phthalate Free