

NAME : SHAH FAISAL


ROLL NO : 23I-0058

SECTION : BSE – 6A

Computer Network Lab 09

BSSE SPRING 2026

LAB 09

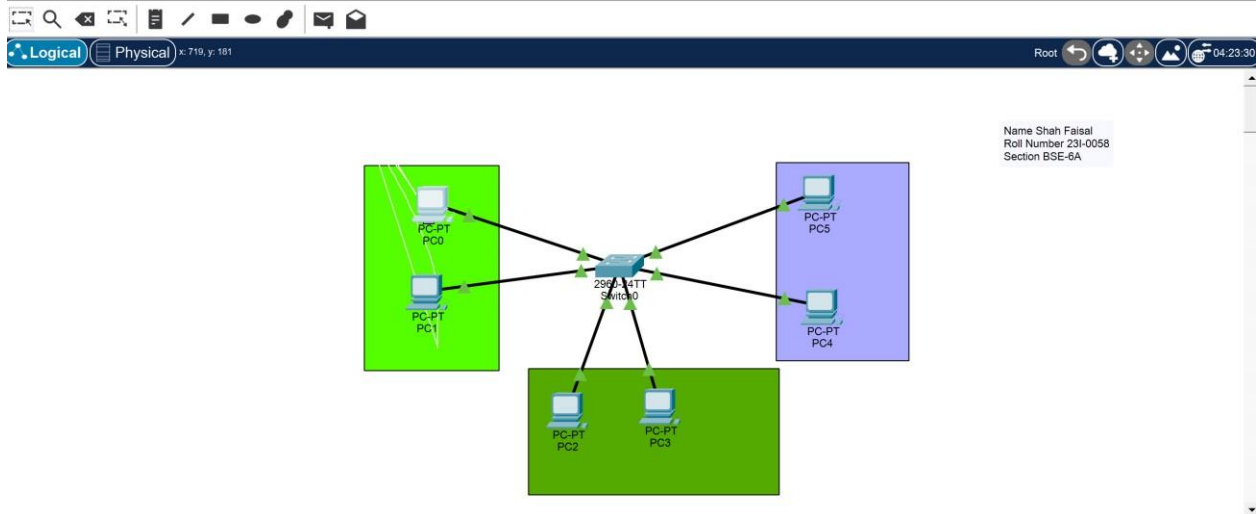

Name Shah Faisal
Roll Number 231-0058
Section BSE-6A

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 10.0.0.1

Subnet Mask 255.0.0.0

Default Gateway 10.0.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::240:BFF:FE46:7066

Default Gateway

Name Shah Faisal
Roll Number 231-0058
Section BSE-6A

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 10.0.0.2

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2D0:EEEE:FE4D:D859

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 172.16.0.1

Subnet Mask 255.255.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2E0:F7FF:FE37:7209

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC3

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 172.16.0.2

Subnet Mask 255.255.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::202:17FF:FE8C:EA85

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC4

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.1.1

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::20C:CFFF:FE6D:E23D

Default Gateway

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC5

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2D0:BAFF:FE2A:6A0

Default Gateway

DNS Server

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC0

Physical Config **Desktop** Programming Attributes

Command Prompt X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Root

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 172.16.0.2

Pinging 172.16.0.2 with 32 bytes of data:

Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 172.16.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Root

Name Shah Faisal
Roll Number 231-0058
Section BSE-6A

PC4

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

Root

Name Shah Faisal
Roll Number 231-0058
Section BSE-6A

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Request timed out.
|
```

Root

Name Shah Faisal
Roll Number 23I-0058
Section BSE-6A

PC0

Physical Config **Desktop** Programming Attributes

Command Prompt

```

      Ping 10.0.0.2 with 32 bytes of data:

      Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
      Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
      Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
      Reply from 10.0.0.2: bytes=32 time<1ms TTL=128

      Ping statistics for 10.0.0.2:
          Packets: Sent = 4, Received = 4, Lost = 0 (0%
      loss),
      Approximate round trip times in milli-seconds:
          Minimum = 0ms, Maximum = 0ms, Average = 0ms

      C:\>ping 192.168.1.1

      Ping 192.168.1.1 with 32 bytes of data:

      Request timed out.
      Request timed out.
      Request timed out.
      Request timed out.

      Ping statistics for 192.168.1.1:
          Packets: Sent = 4, Received = 0, Lost = 4 (100%
      loss),

      C:\>ping 172.16.0.1

      Ping 172.16.0.1 with 32 bytes of data:

      Request timed out.
          
```

Root

Name Shah Faisal
 Roll Number 231-005
 Section BSE-6A

☐ Top










Scenario 0

Fire	Last Status	Source	Destination	Type	Color	Time
------	-------------	--------	-------------	------	-------	------

Device	IP Address	Subnet Mask	Network Address
PC1	10.0.0.1	255.0.0.0	10.0.0.0
PC2	10.0.0.2	255.0.0.0	10.0.0.0
PC3	172.16.0.1	255.255.0.0	172.16.0.0
PC4	172.16.0.2	255.255.0.0	172.16.0.0
PC5	192.168.1.1	255.255.255.0	192.168.1.0
PC6	192.168.1.2	255.255.255.0	192.168.1.0

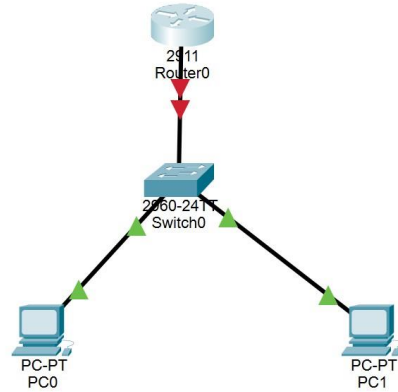

Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

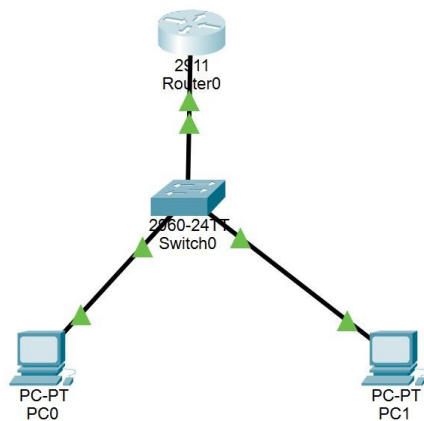

Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up
exit
Router(config)#
```

Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2E0:F9FF:FE2B:435B

Default Gateway

DNS Server

802.1X


☐ Use 802.1X Security

Authentication MD5


Username

Root


Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

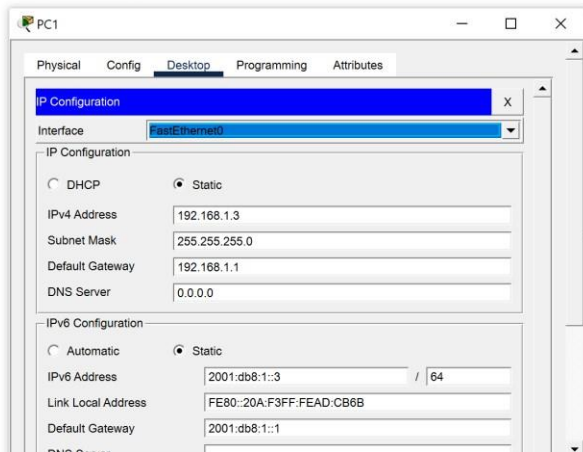

Name: Shah Faisal
 Roll: 231-0058
 Section: BSE-6A
 Lab 9

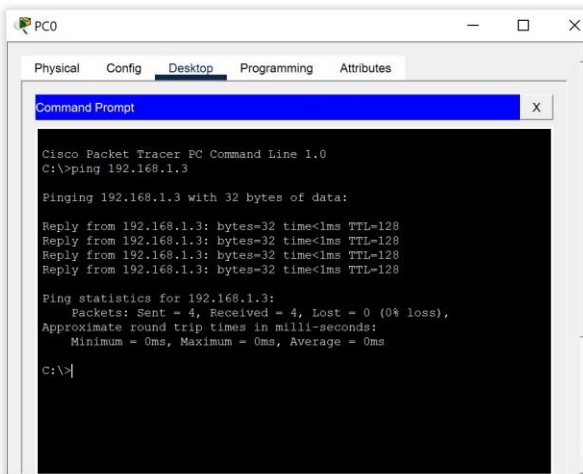

Name: Shah Faisal
 Roll: 231-0058
 Section: BSE-6A
 Lab 9

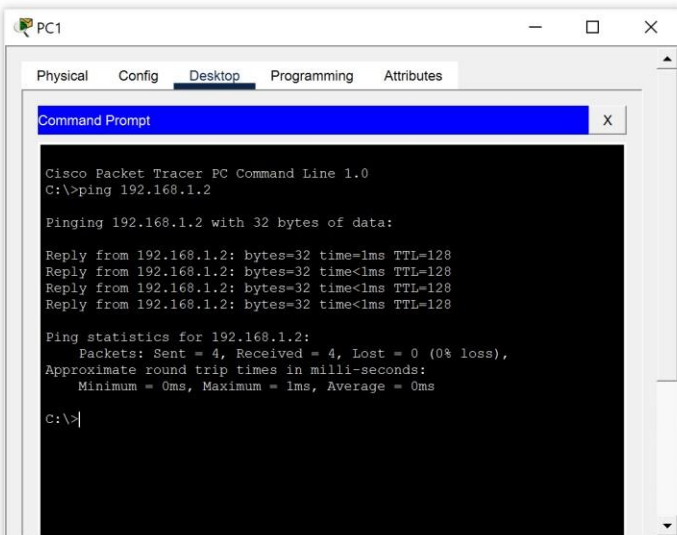

Name: Shah Faisal
 Roll: 231-0058
 Section: BSE-6A
 Lab 9

```
PC0

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 2001:db8:1::3

Pinging 2001:db8:1::3 with 32 bytes of data:

Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time=12ms TTL=128

Ping statistics for 2001:DB8:1::3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>
```

Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

```
*Untitled - Notepad

File Edit Format View Help
Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9

100% Windows (CRLF) UTF-8
```

```
PC1

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 2001:db8:1::2

Pinging 2001:db8:1::2 with 32 bytes of data:

Reply from 2001:DB8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::2: bytes=32 time<1ms TTL=128

Ping statistics for 2001:DB8:1::2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Name: Shah Faisal
Roll: 231-0058
Section: BSE-6A
Lab 9