

NAME : SHAH FAISAL


ROLL NO : 23I-0058

SECTION : BSE – 6A

Computer Network
LAB 11

BSSE SPRING 2026

LAB 11

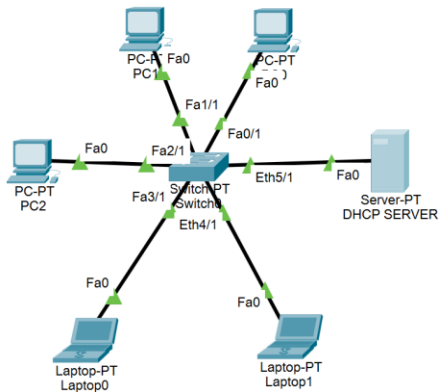

SHAH FAISAL
 23I-0058
 BSE-6A
 LAB 11

DHCP SERVER

Physical
Config
Services
Desktop
Programming
Attributes

IP Configuration
X

☐ DHCP
☒ Static

IPv4 Address
10.0.0.1

Subnet Mask
255.0.0.0

Default Gateway
10.0.0.1

DNS Server
0.0.0.0

☐ Automatic
☒ Static

IPv6 Address
/

Link Local Address
FE80::260:2FFF:FEAE:7AE1

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication
MD5

Username

Password

Root

SHAH FAISAL
 23I-0058
 BSE-6A
 LAB 11

Physical
 Config
 Services
 Desktop
 Programming
 Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP
- PRP

DHCP

Interface: FastEthernet0 Service: ☐ On ☒ Off

Pool Name: serverPool

Default Gateway: 10.0.0.1

DNS Server: 0.0.0.0

Start IP Address: 10 0 0 2

Subnet Mask: 255 0 0 0

Maximum Number of Users: 10

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	10.0.0.1	0.0.0.0	10.0.0.2	255.0.0.0	10	0.0.0.0	0.0.0.0

Root

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

Realtime

Physical
 Config
 Services
 Desktop
 Programming
 Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP
- PRP

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 10.0.0.1

DNS Server: 0.0.0.0

Start IP Address: 10 0 0 2

Subnet Mask: 255 0 0 0

Maximum Number of Users: 10

TFTP Server: 0.0.0.0


WLC Address: 0.0.0.0

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	10.0.0.1	0.0.0.0	10.0.0.2	255.0.0.0	10	0.0.0.0	0.0.0.0


Root

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

Realtime

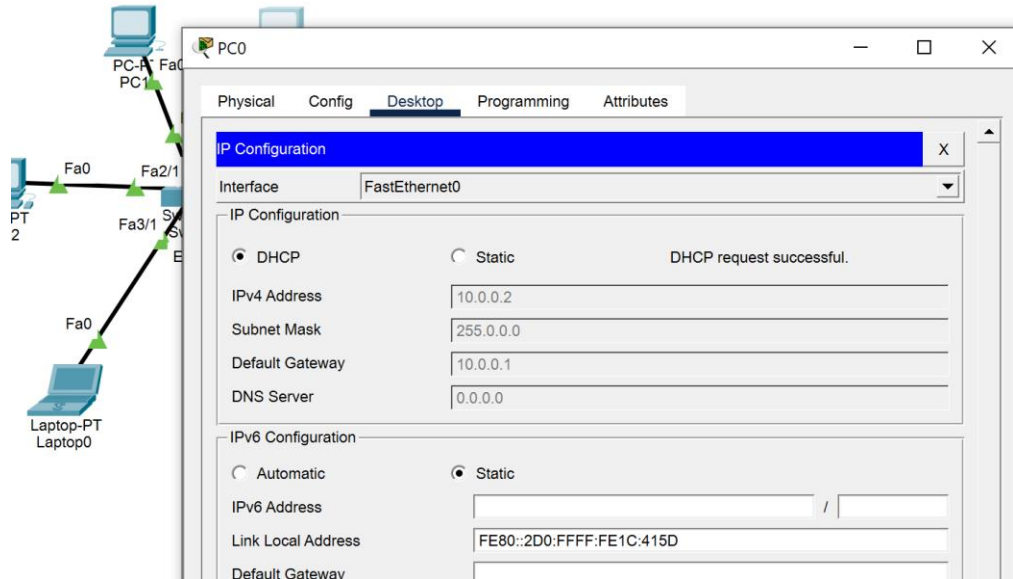

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

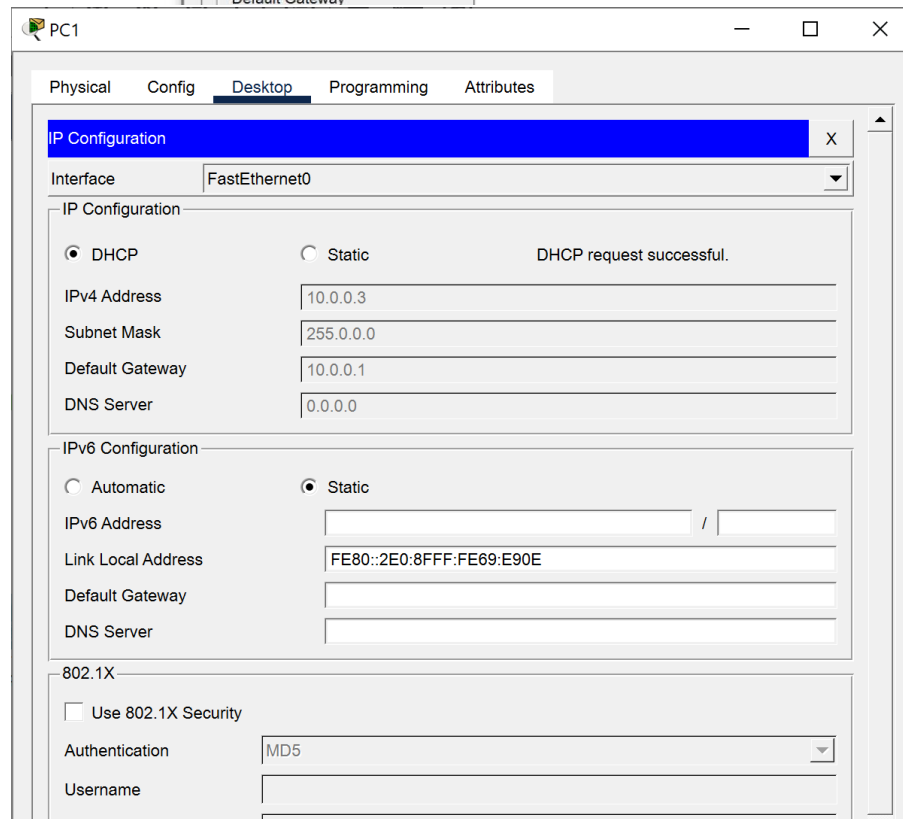

Root

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 10.0.0.4

Subnet Mask 255.0.0.0

Default Gateway 10.0.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2E0:F9FF:FE12:84EC

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Root

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

Laptop0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 10.0.0.5

Subnet Mask 255.0.0.0

Default Gateway 10.0.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::206:2AFF:FE06:264D

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Root

SHAH FAISAL
23I-0058
BSE-6A
LAB 11

PC0

Physical Config **Desktop** Programming Attributes

Command Prompt

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.4

Pinging 10.0.0.4 with 32 bytes of data:

Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data:


Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128
Reply from 10.0.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
        
```

Root

SHAH FAISAL
 23I-0058
 BSE-6A
 LAB 11

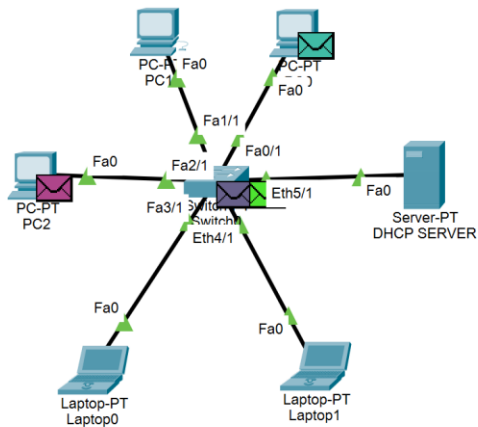

SHAH FAISAL
 23I-0058
 BSE-6A
 LAB 11