



Hardware Diagram

PAGE NO.:

DATE / /

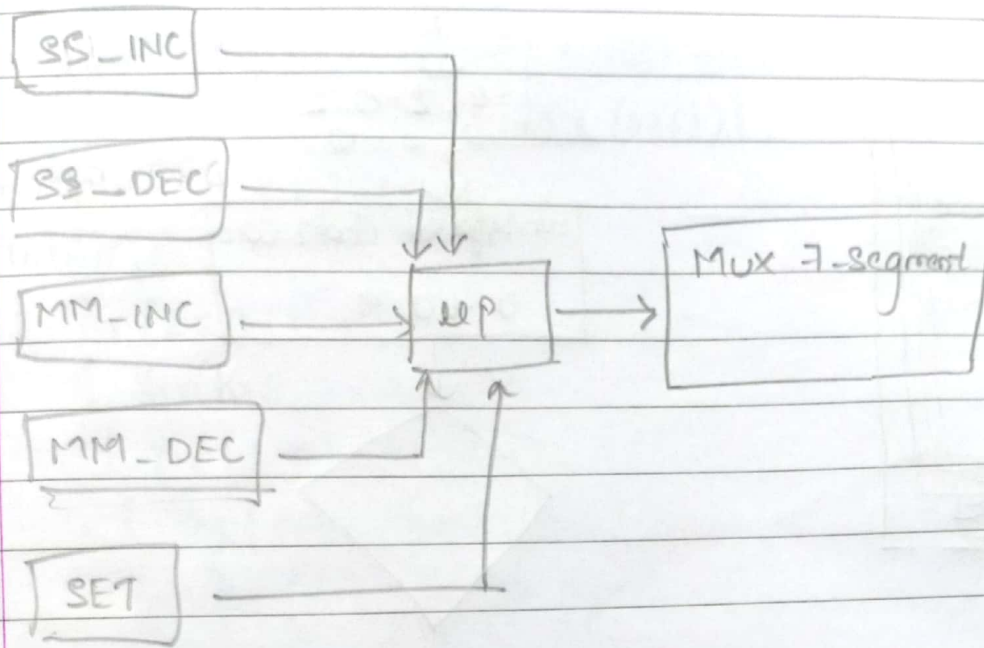



Software Block Diagram

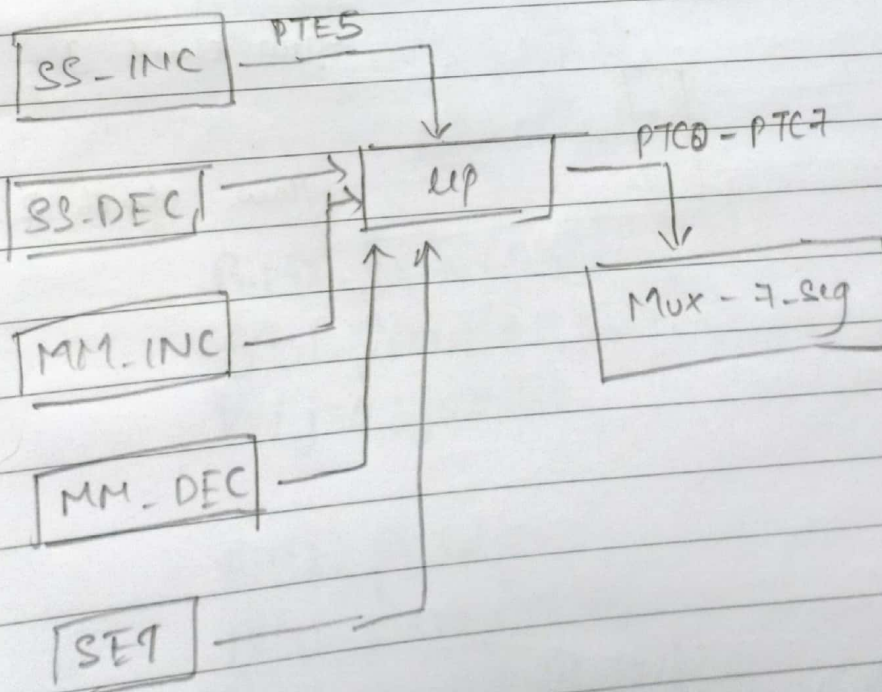

Use case 1 set mode

PAGE NO.:

DATE / /

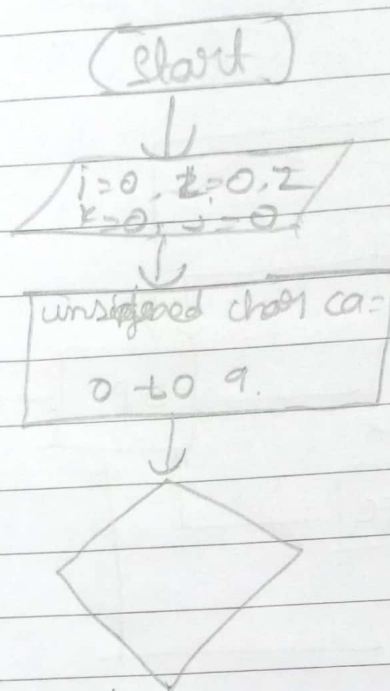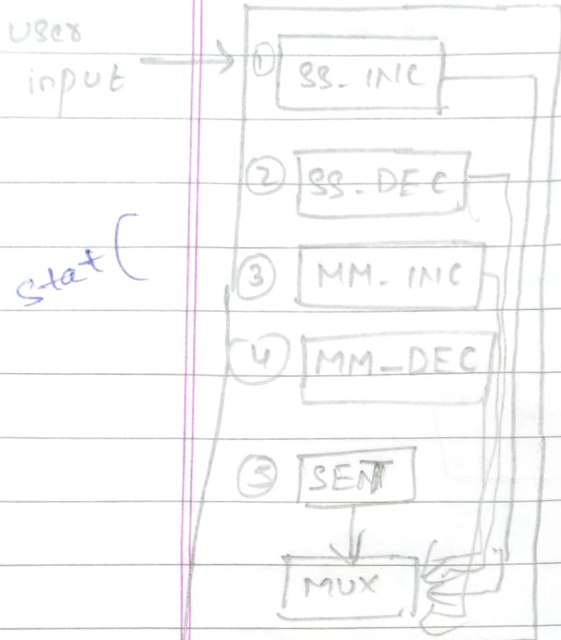

0000
0000
0


Sequence Diagram

set mode slot SS-INC SS-DEC MM-DEC MM-INC


Monitor
for
switches




Monitor
for
switches

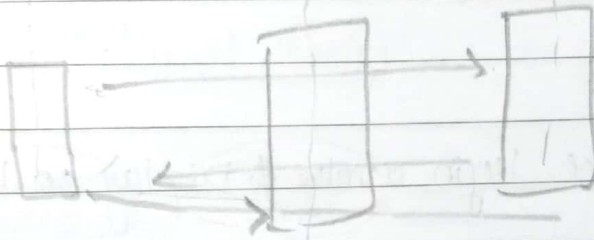

11

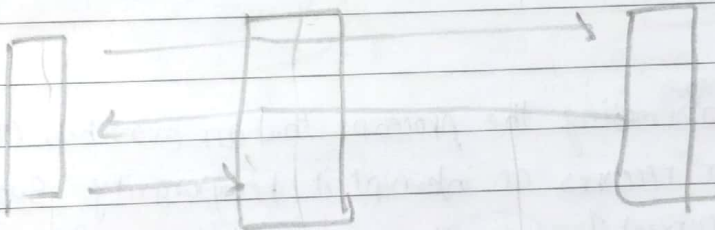


11

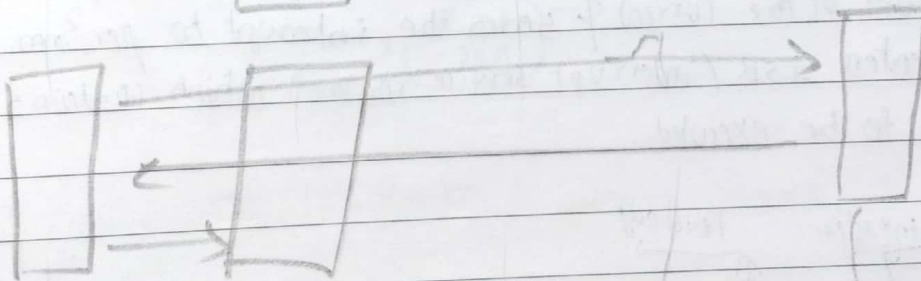


11



INCREMENT/ DECREMENT

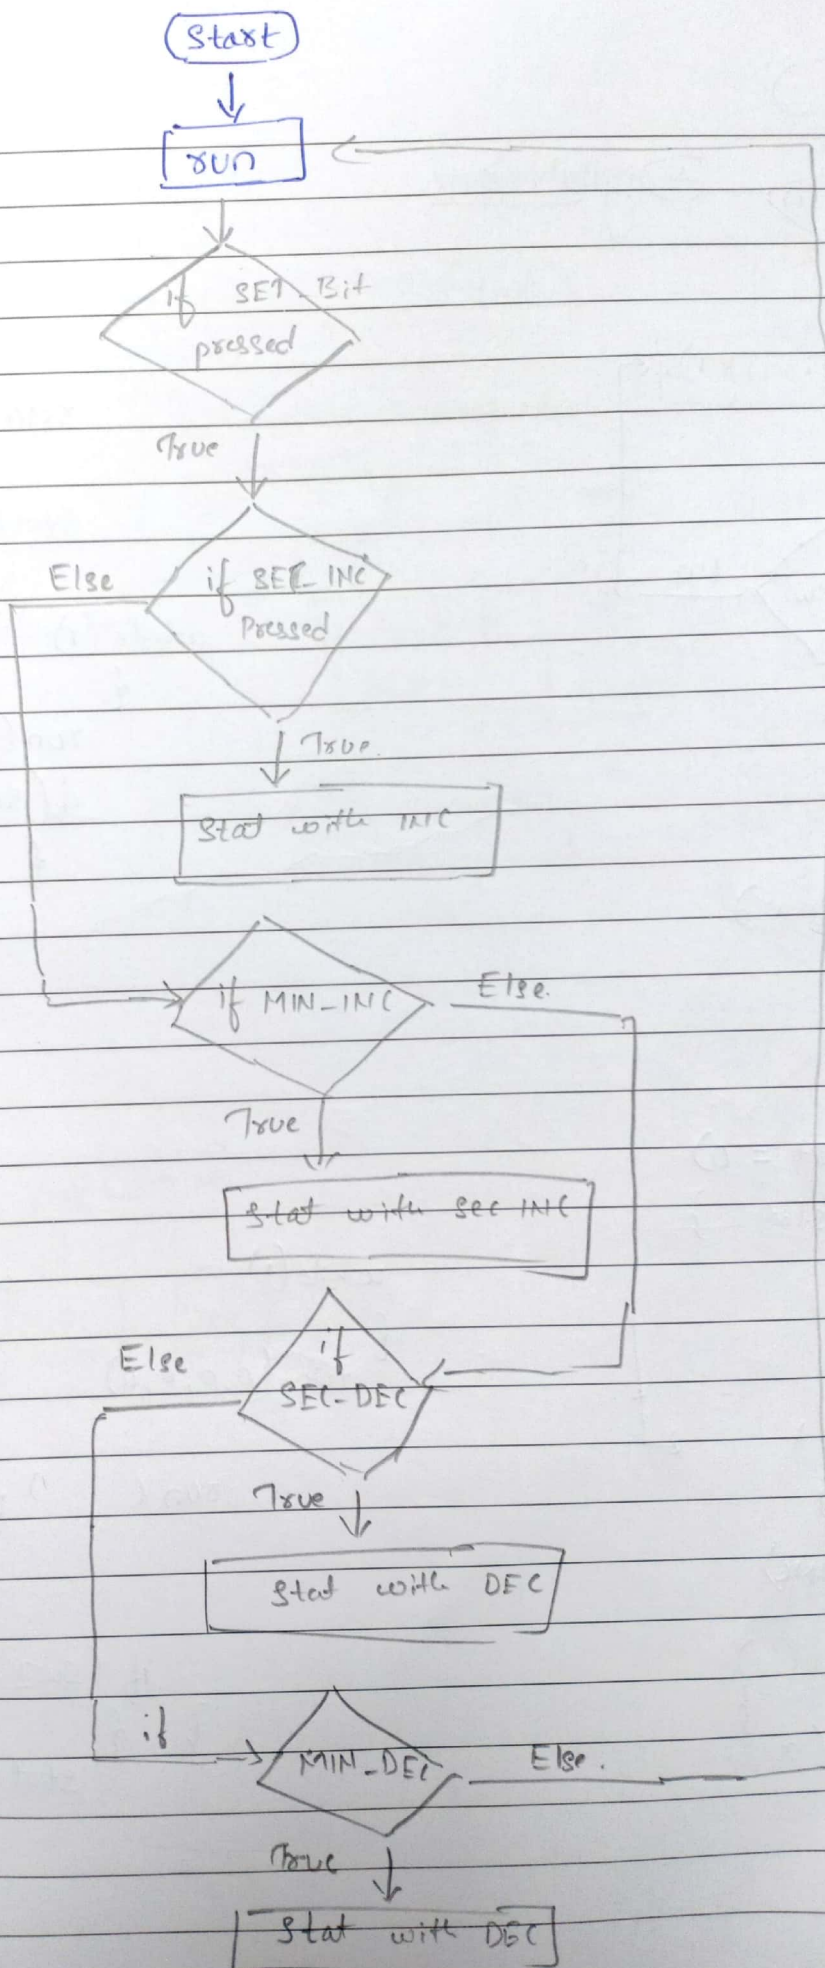


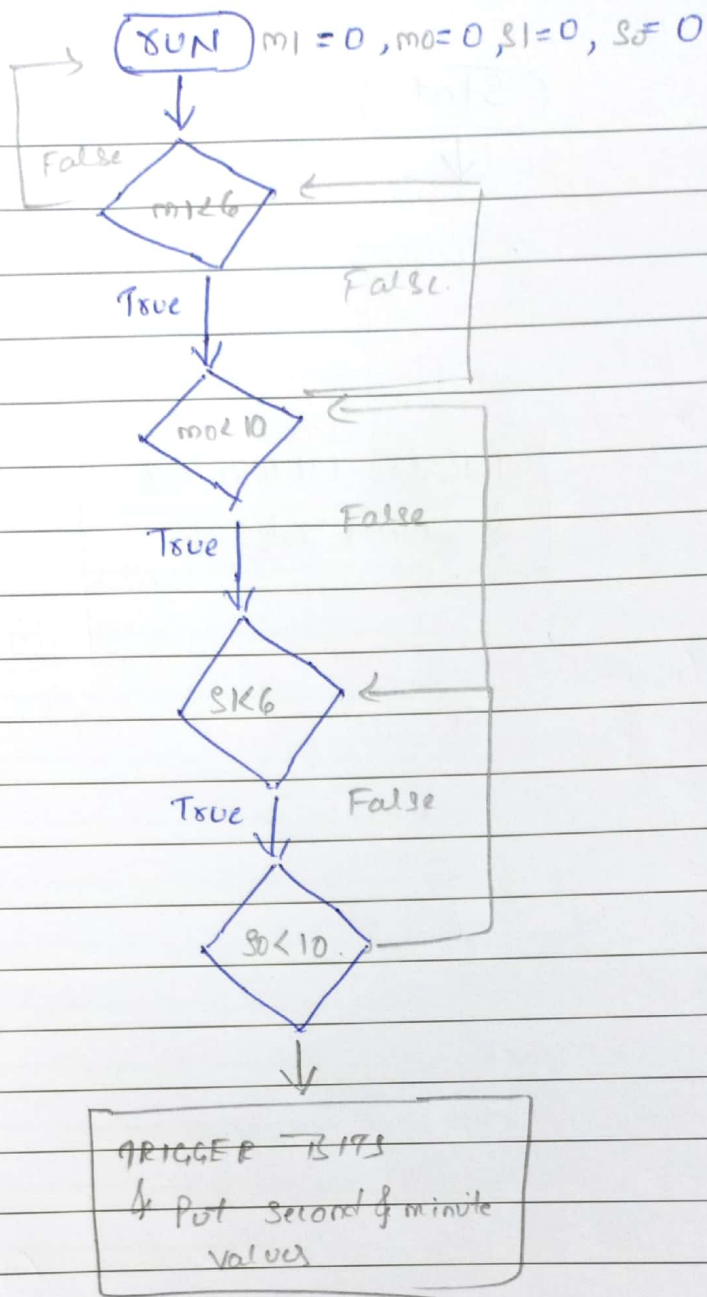

mode

S-lat function

S-lat m1, m0 : s1, s0.



True.

↓
TRIGGER MINUTE BIT
& seconds bits.

TRI = 10