

EXPERIMENT – 17

UART INTERFACING USING INTERRUPT IN KEIL

AIM: To receive serial data using interrupt.


OBJECTIVES:

1. To configure UART for serial data reception.
2. To generate an interrupt when serial data is received.
3. To display the received ASCII value on Port 1.

PROGRAM:

```
#include <reg51.h>
void serial_ISR(void) interrupt 4
{
    if(RI)
    {
        P1 = SBUF;
        RI = 0;
    }
}
void main()
{
    TMOD=0x20;
    TH1=0xFD;
    SCON=0x50;
    TR1=1;
    ES=1;
    EA=1;
    while(1);
}
```

OUTPUT IMAGE:

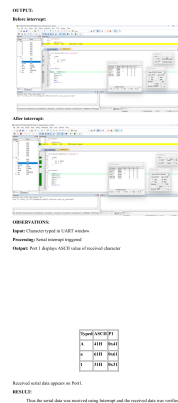

RESULT:

Thus the serial data was received using Interrupt and the received data was verified.