
File Edit Options View Tools Extensions Window Help

Logical | Physical | x: 3423, y: 563 | Root | 02:20:30

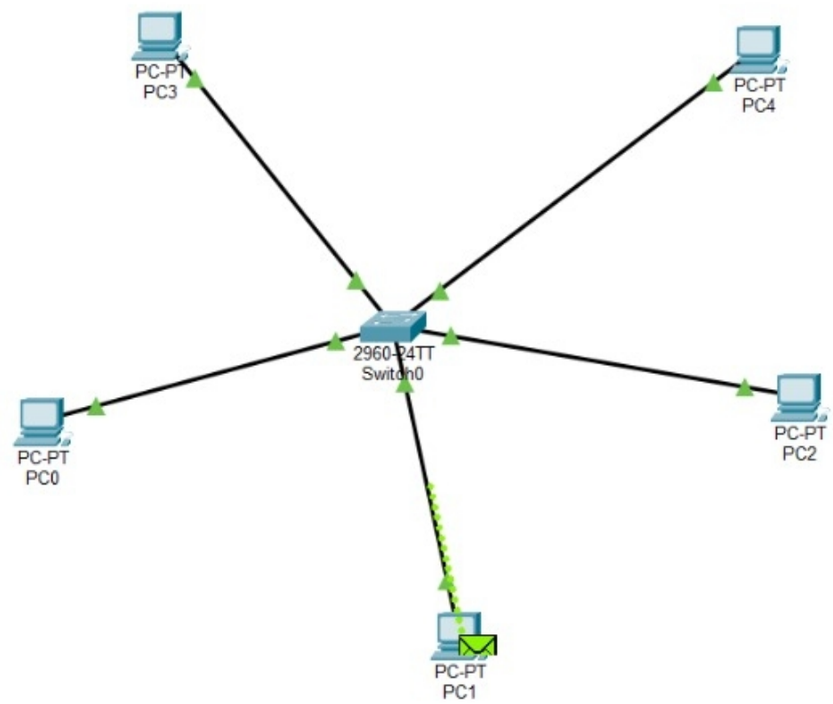

Simulation Panel

Event List

Vis.	Time(sec)	Last Device
	1.262	--
	1.263	PC1
	1.264	--
	1.264	Switch0
	1.264	Switch0
	1.264	Switch0
	1.264	Switch0
	1.264	--
	1.265	PC2
	1.266	Switch0
	1.266	--
	1.267	PC1
	1.268	Switch0
	1.269	PC2
	1.270	Switch0

Reset Simulation | Constant Delay | Captured to: 1.270 s

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPSec, ISAKMP, IoT, IoT TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoED, PTP, Profinet, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Edit Filters | Show All/None

Time: 00:03:53.448 | PLAY CONTROLS: | Event List | Realtime | Simulation

Search for device

PT8200 | 4331 | 4321 | IR8340 | 1941 | 2901 | 2911 | 819IOX | 819HGW | 829 | 1240

(Select a Device to Drag and Drop to the Workspace)

Scenario 0 | New | Delete | Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC1	PC1	ICMP		1.262	N	0	(edit)	(delete)
	Successful	PC1	PC2	ICMP		1.262	N	1	(edit)	(delete)

PC0

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:


Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

File Edit Options View Tools Extensions Window Help

Logical | Physical x: 1501, y: 481 | Root

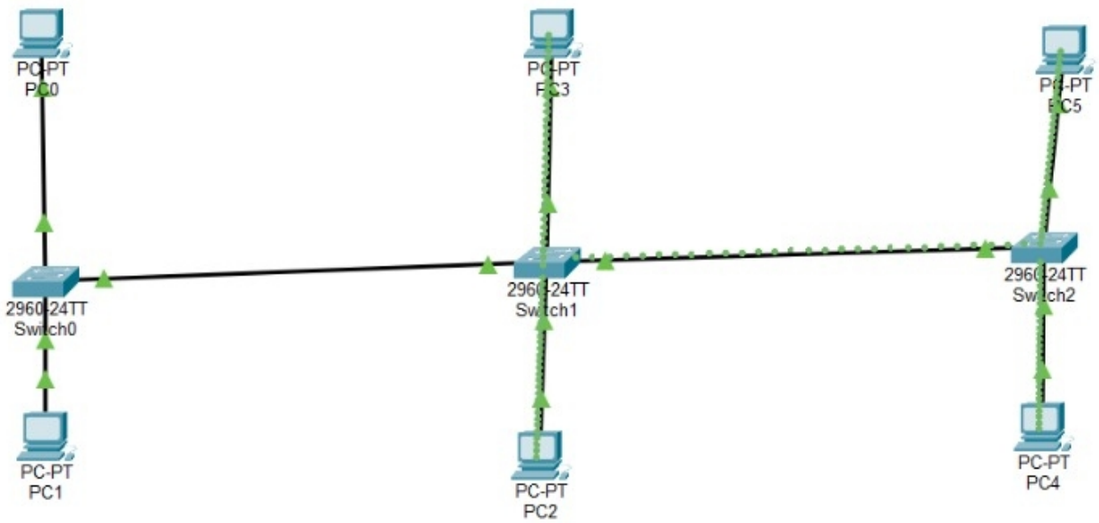

Simulation Panel

Event List

Vis.	Time(sec)	Last Device
	0.004	Switch0
	0.004	Switch1
	0.004	Switch1
	0.004	Switch1
	0.004	Switch0
	0.004	Switch2
	0.004	Switch2
	0.005	Switch1
	0.005	Switch1
	0.005	Switch1
	0.005	PC3
	0.005	Switch2
	0.005	Switch2

Reset Simulation | Constant Delay | Capture 0.0

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGR FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPSec, ISAKMP, IoT, IoT TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoED, PT Profinet, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TC TFTP, Telnet, UDP, USB, VTP

Edit Filters | Show All/None

Time: 00:01:21.045 PLAY CONTROLS: | Event List | Realtime | Simulat

PT8200 4331 4321 IR8340 1941 2901 2911 819IOX 819HGW 829 1240

Search for device

(Select a Device to Drag and Drop to the Workspace)

Scenario 0 | New | Delete | Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)
	In Progress	PC0	PC3	ICMP		0.000	N	1	(edit)	(delete)
	In Progress	PC0	PC2	ICMP		0.000	N	2	(edit)	(delete)
	--	PC0	PC1	ICMP		2.961	N	3	(edit)	(delete)

PC0

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:

Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128


Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

File Edit Options View Tools Extensions Window Help





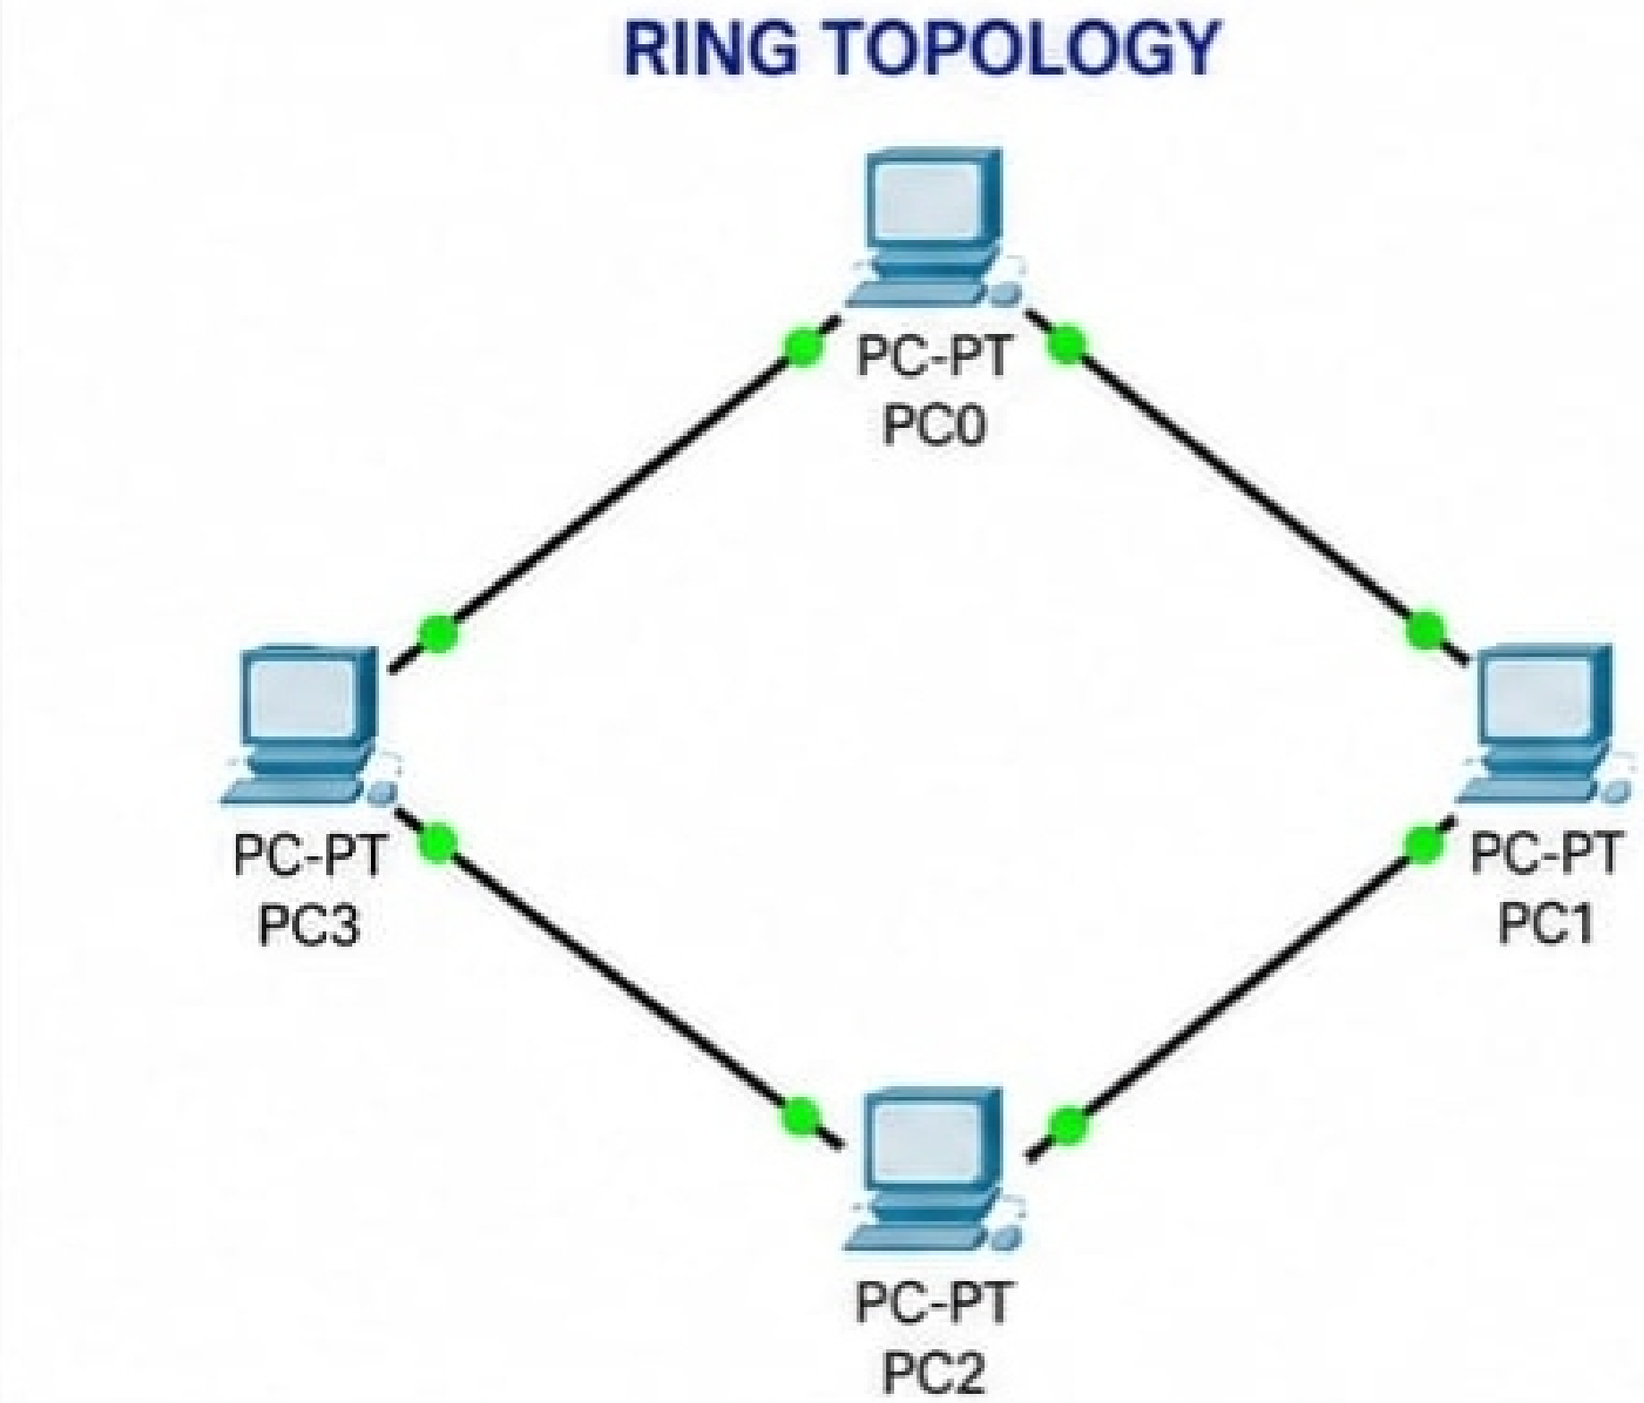

```
Packet Tracer PC Command Line 1.0
C:\> ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```