Name:

Ahtisham Ifthikhar

Roll-No:

2024-CET-04

Department:

Software Engineering

Group:

Computer Engineering Technology [4th Sem]

Subject:

Computer Network

Lab Task:

Basic Router Access and CLI Configuration

Submitted To:

Engr. Asma Javid

Lab Task 4

Basic Router Access and CLI Configuration

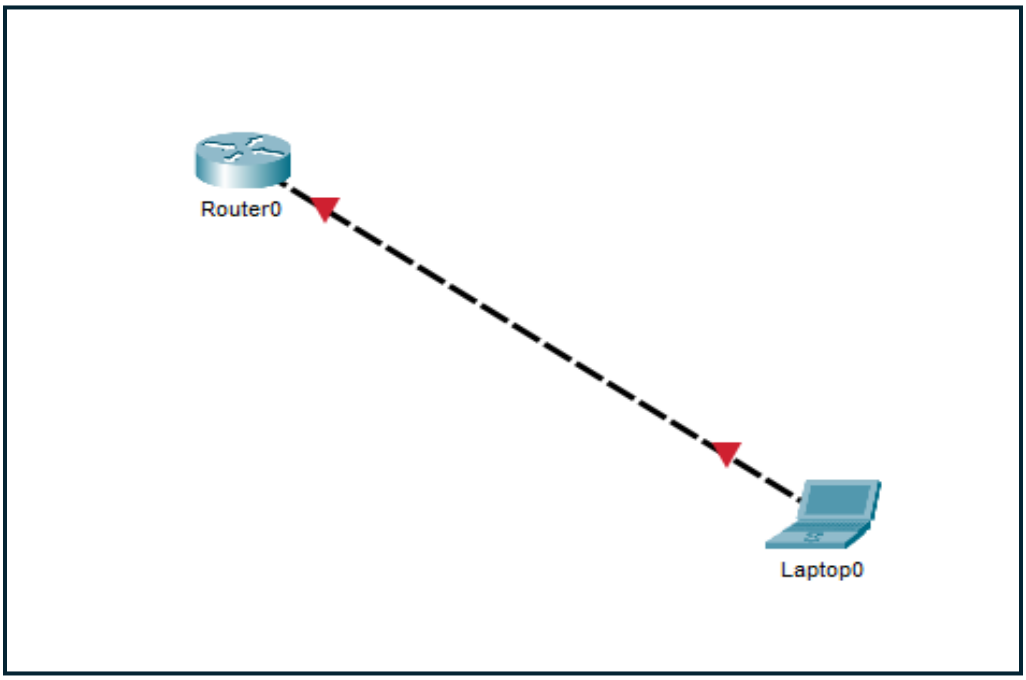

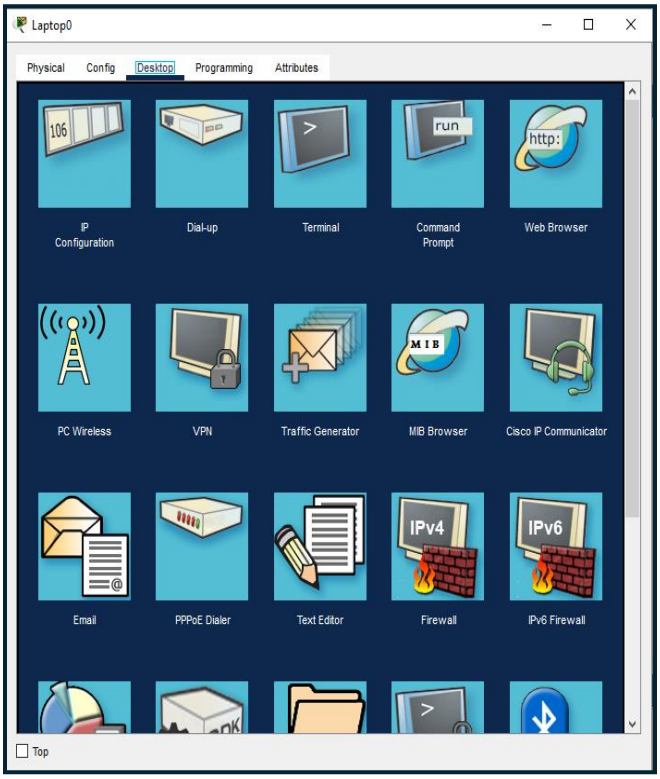

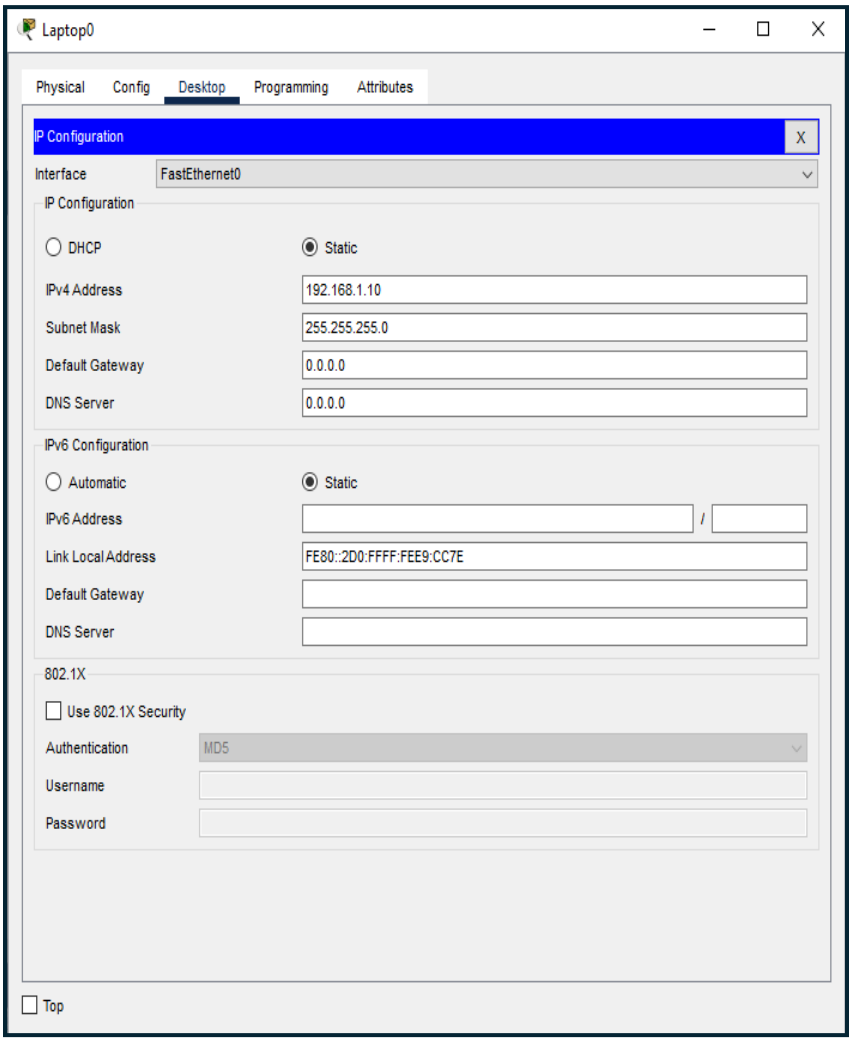
Laptop0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:FFFF:FEE9:CC7E
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

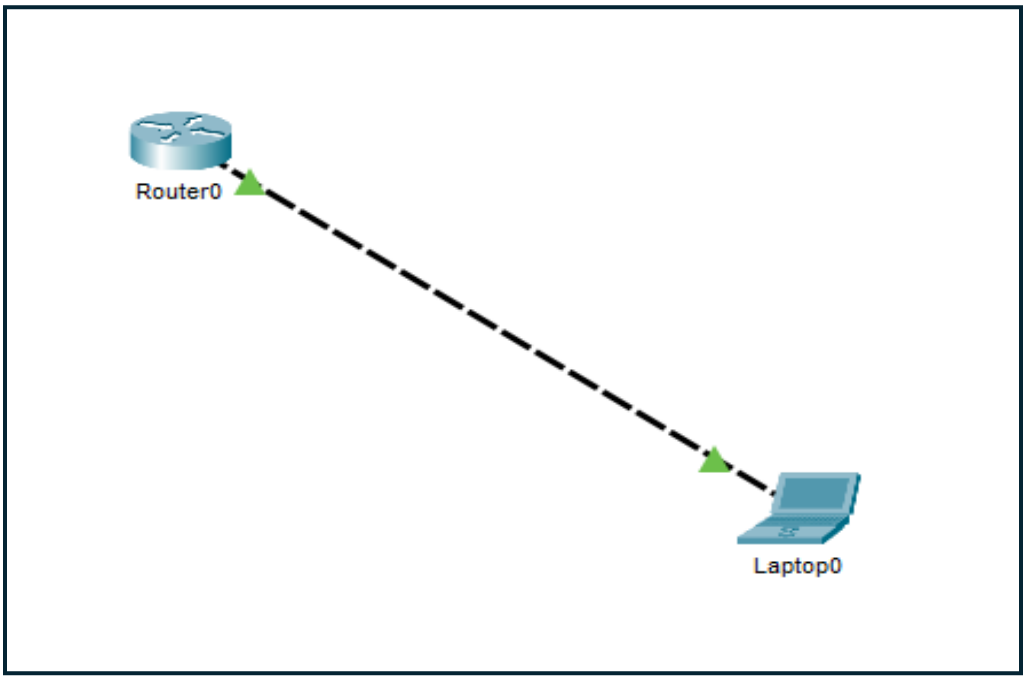
Router0
Laptop0

Open a router and access CLI.

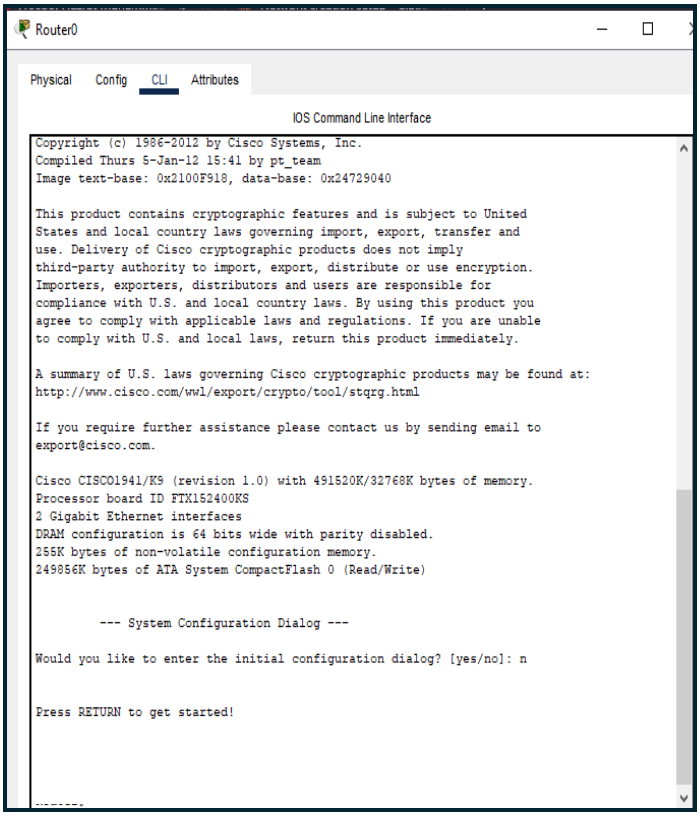

Enter privileged mode using enable.

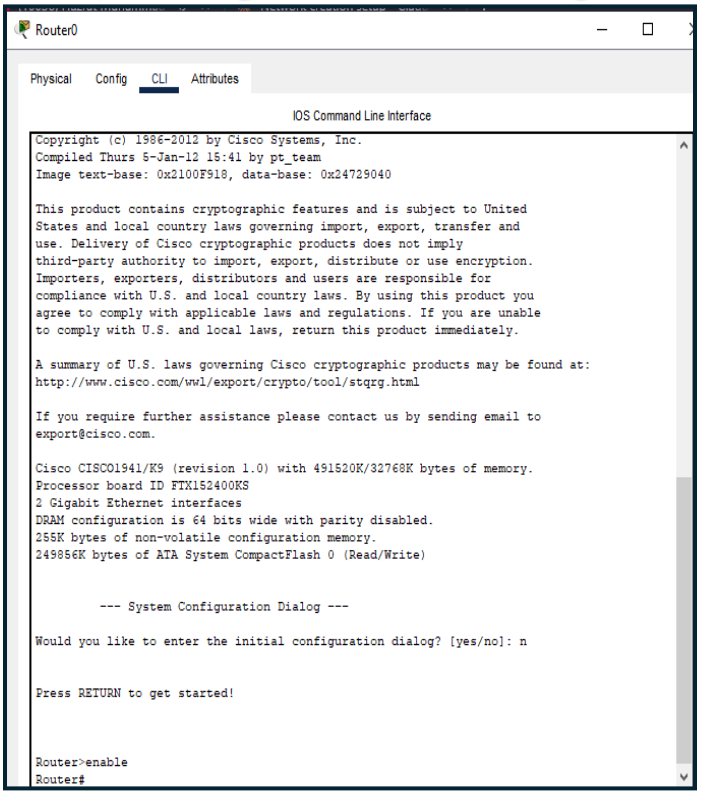

Enter global configuration mode.

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Image text-base: 0x2100F918, data-base: 0x24729040

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISCO1941/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
2 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)


         --- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: n


Press RETURN to get started!



Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
```

Configure enable password.

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISCO1941/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
2 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)


         --- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: n


Press RETURN to get started!



Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#enable password Pass48879
Router(config)#
```

Enable password encryption using service password-encryption.

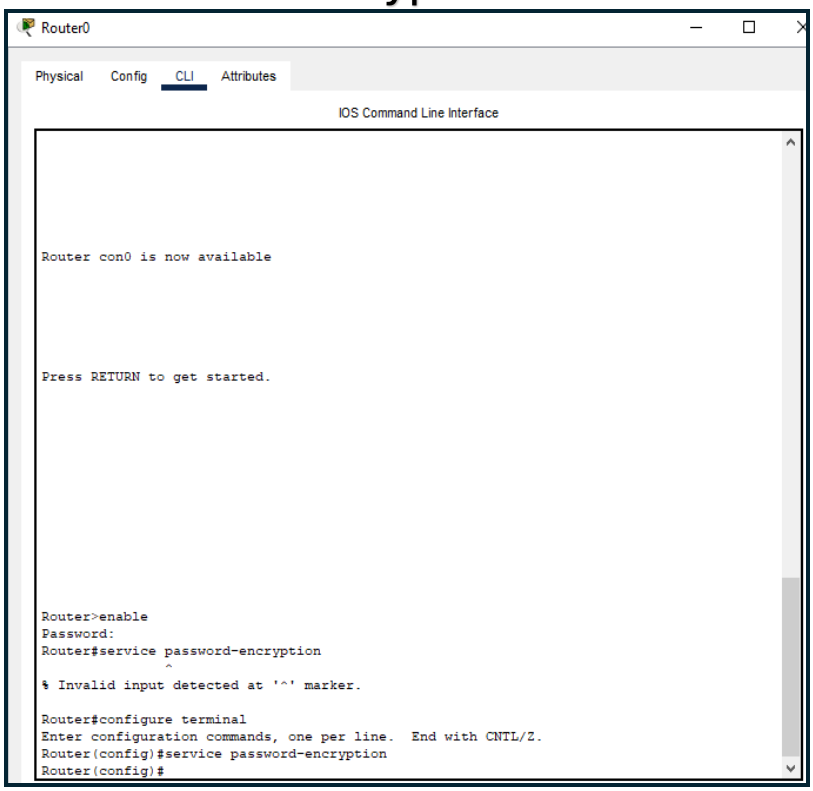

Configure enable secret password.

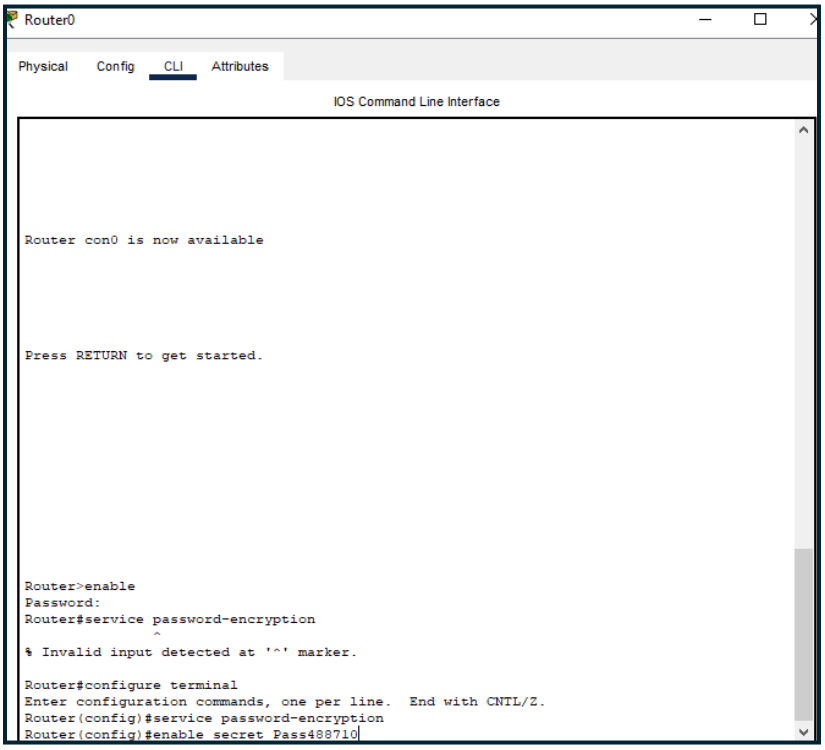

Display running and startup configuration.

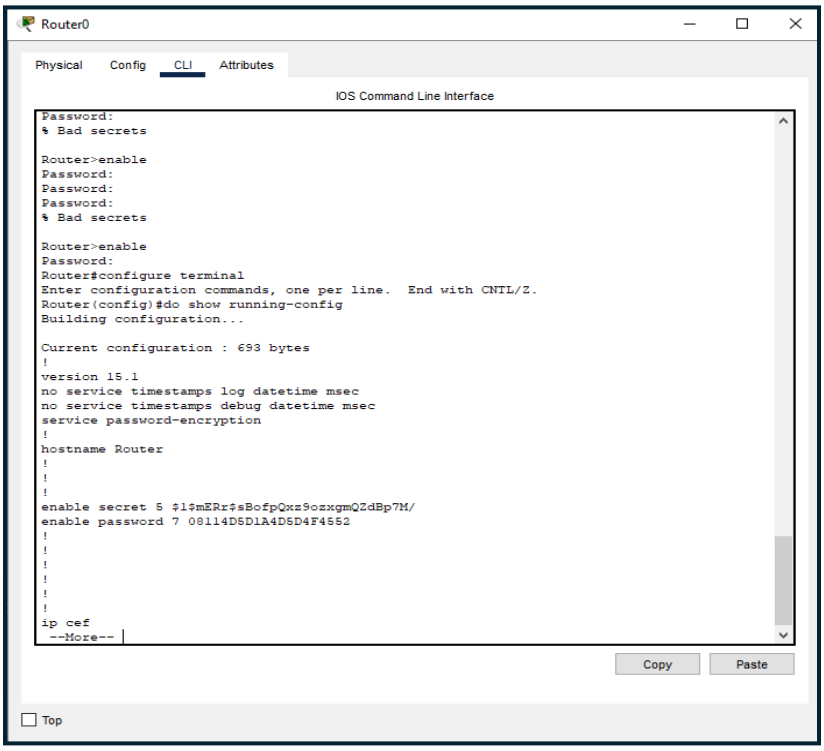


```
Password:
% Bad secrets

Router>enable
Password:
Password:
Password:
% Bad secrets

Router>enable
Password:
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#do show running-config
Building configuration...

Current configuration : 693 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname Router
!
!
!
enable secret 5 $1$mERr$sBofpQxz9ozxgmQZdBp7M/
enable password 7 08114D5D1A4D5D4F4552
!
!
!
!
!
!
ip cef
 --More--
```