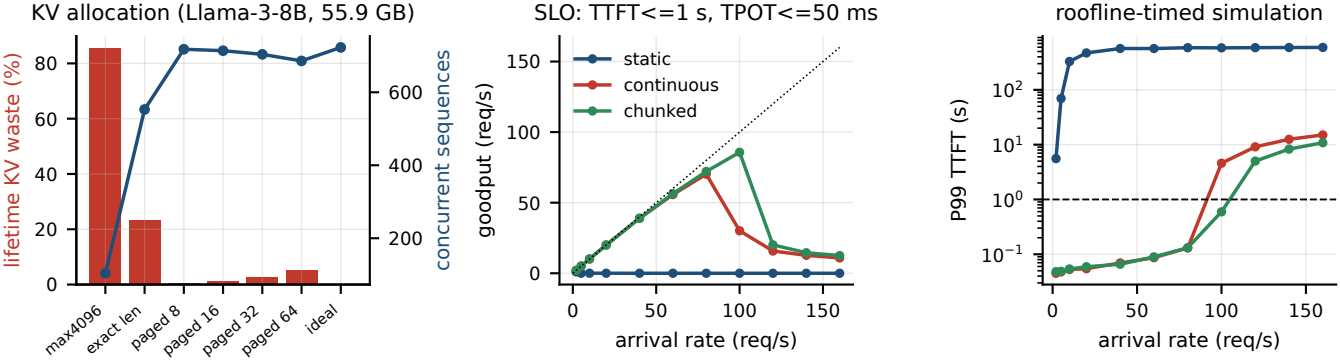
KV allocation (Llama-3-8B, 55.9 GB)
lifetime KV waste (%)
concurrent sequences
0
20
40
60
80
200
400
600
max4096
exact len
paged 8
paged 16
paged 32
paged 64
ideal
SLO: TTFT<=1 s, TPOT<=50 ms
goodput (req/s)
arrival rate (req/s)
static
continuous
chunked
0
50
100
150
roofline-timed simulation
P99 TTFT (s)
10^{-1}
10^{0}
10^{1}
10^{2}