

PHOTONTEK

HORTICULTURAL LIGHTING

X 600W PRO 3.1

FULL-SPECTRUM LED

The X 600W PRO 3.1 is a powerful horticulture LED lighting fixture made for hobby and professional grow systems. This fixture has been reoptimized to deliver more light quantity, light quality and turn full cycle grows easier than ever. Equipped with highly efficient light-emitting diodes, the new X is built for maximum yields and quality crops.

3.1
μmol/J
EFFICACY

1990
μmol/s
PPF

X 600W PRO 3.1



X 600W PRO 3.1

FULL-SPECTRUM LED

PRODUCT SPECIFICATIONS

PRODUCT CODE PTEKLED036

LIGHT DISTRIBUTION 120°

LIGHT SOURCE SAMSUNG LM301H EVO | OSRAM 4.24

INPUT VOLTAGE 120-277 V AC, 50/60 HZ

INPUT POWER 640 W (± 5%) @ 230 V AC

EFFICACY 3.1 $\mu\text{mol}/\text{J}$ @ 230 V AC

PPF 1990 $\mu\text{mol}/\text{s}$

FOOTPRINT 5 x 5 ft (1.5 x 1.5 m)

POWER FACTOR 0.98

DIMMING DIMMER (INCL.) OFF-25-50-75-100%

EXTERNAL CONTROL DIGITAL CONTROLLER

OR UNIV. CONTROL 0-10 V

NET WEIGHT 29.8 lbs (13.5 Kg)

DIMENSIONS 46.5" x 42.9" x 3.1" (1182 x 1091 x 81 mm)

SPECTRUM FULL SPECTRUM

THERMAL MANAGEMENT PASSIVE

LIFETIME L90 > 60000 HRS

CCT 3600 K

QUANTITY OF LED BARS 6

QUANTITY OF DIODES 2880 WHITE | 72 RED


IP RATING IP65

BTU 2201 BTUS/H

BTU (DRIVER REMOTE) 2047 BTUS/H

WARRANTY 5 YEARS

CERTIFICATIONS FCC, CSA & ICC

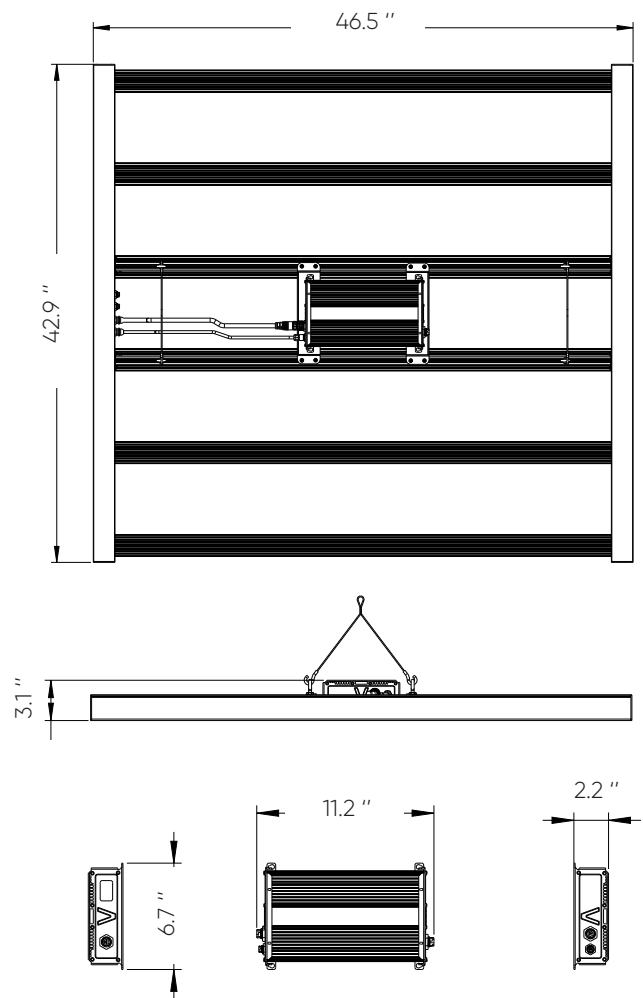

INPUT POWER [W] AND CURRENT [A] PER DIMMING RANGE


@ 120 V

DIMMING	INPUT POWER [W]	INPUT CURRENT [A]
100%	623	5.24
75%	481	4.05
50%	307	2.06
25%	152	1.32

ITEMS INCLUDED IN THE BOX

- 6 X PHOTONTEK 100W PRO 3.1 FULL SPECTRUM BARS
- 1 X PHOTONTEK 600W PRO 3.1 FRAME
- 1 X PHOTONTEK 600W PRO DRIVER
- 1 X LIGHT DIMMER (OFF-25-50-75-100%)
- 2 X METAL CABLE HANGERS
- 1 X POWER CABLE (NEMA 5-15A 120 V)
- 1 X POWER CABLE (NEMA 6-15A 240 V)
- 1 X MANUAL

SPECTRA

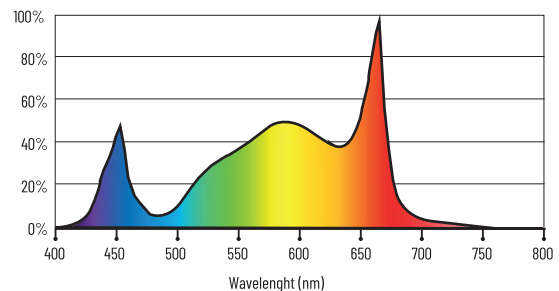


AVAILABLE PARTS

- [PTEKM0024] P-TEK 120V LED POWER CABLE
- [PTEKM0020] P-TEK 240V LED POWER CABLE
- [PTEKM0021] P-TEK 277V LED POWER CABLE
- [PTEKM0018] PHOTONTEK LED DAISY-CHAIN CABLE
- [PTEKM0019] PHOTONTEK LED DRIVER + DIMMING EXTENSION CABLE


FLOWERING STAGE

Walls reflection level: High
Distance between fixture and canopy: 20"
Canopy PPFD average: 796 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 100% (640 W)

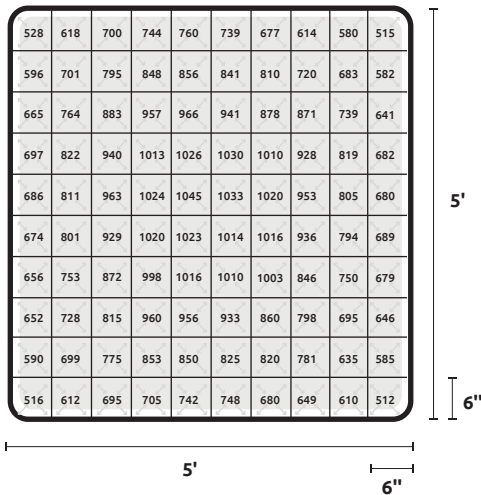


VEGETATIVE STAGE

Walls reflection level: High
Distance between fixture and canopy: 20"
Canopy PPFD average: 590 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 75% (485 W)

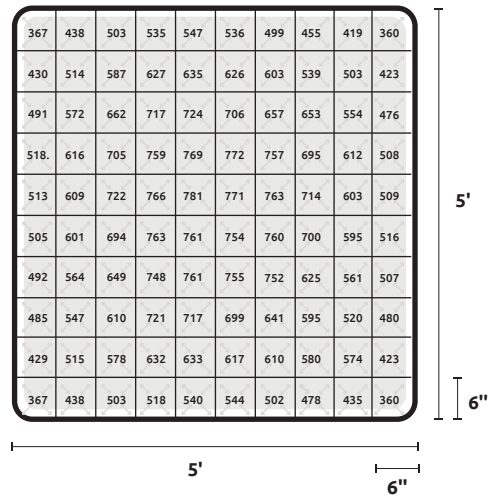


MOTHERS STAGE

Walls reflection level: High
Distance between fixture and canopy: 20"
Canopy PPFD average: 400 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 50% (320 W)

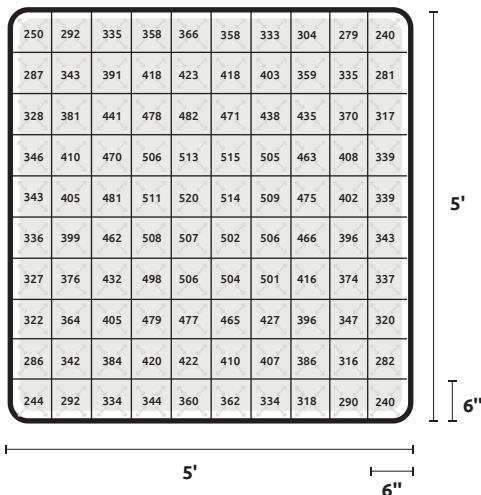

CLONES STAGE

Walls reflection level: High
Distance between fixture and canopy: 5'
Canopy PPFD average: 120 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 25% (160 W)

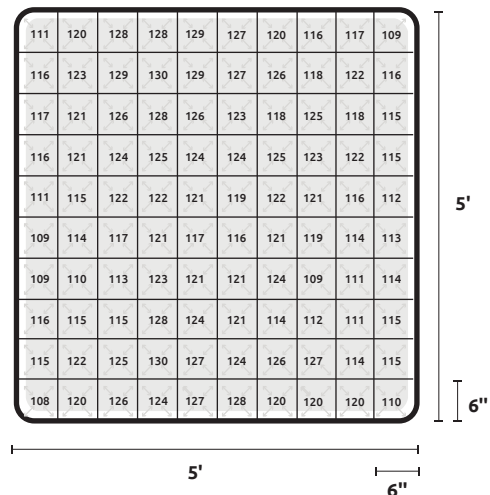

SEEDLING STAGE

Walls reflection level: High
Distance between fixture and canopy: 24"
Canopy PPFD average: 180 $\mu\text{mol}/\text{m}^2/\text{s}$
Dimming (Power Consumption): 25% (160 W)

