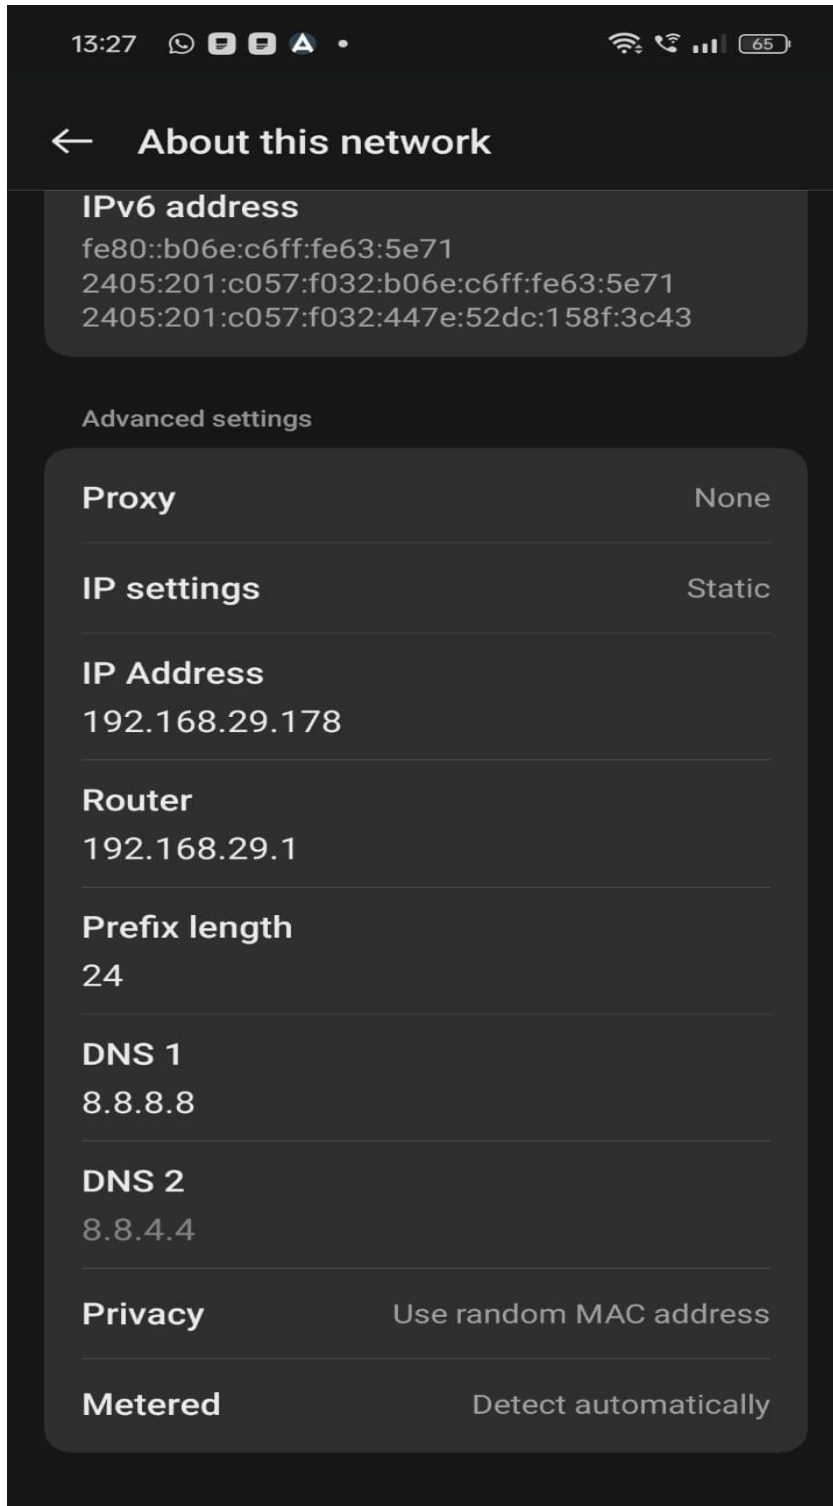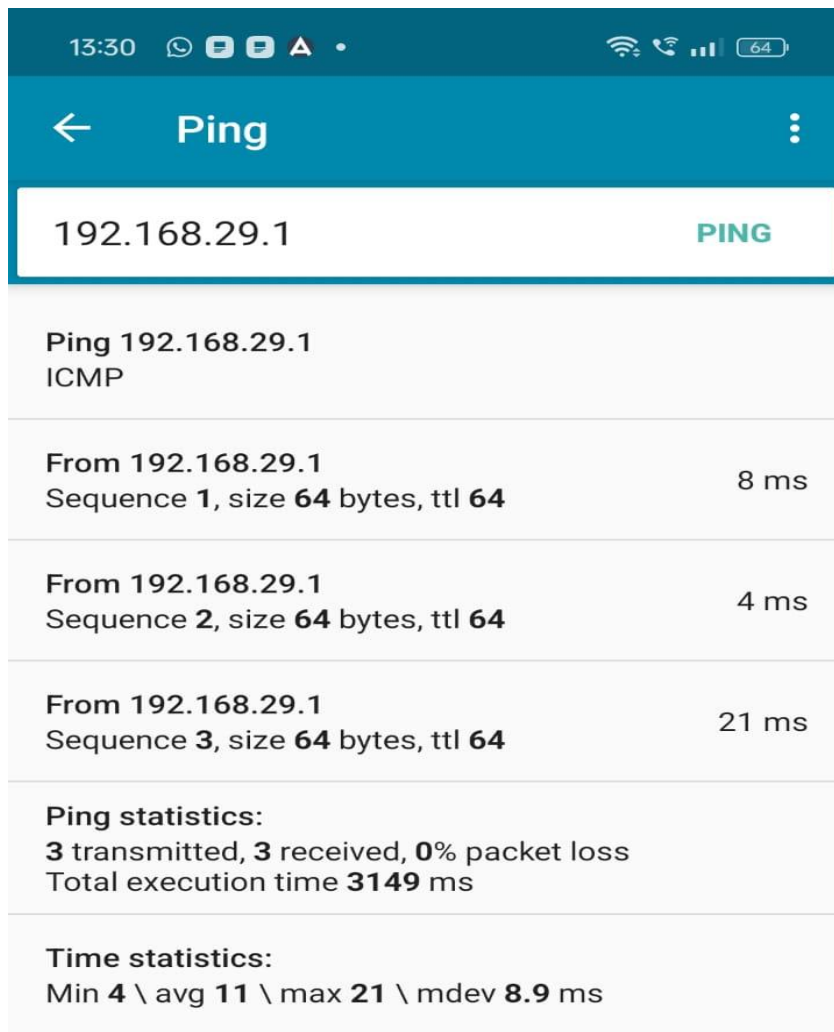3. Manually configure static IPs on the client devices(like Pc or your mobile phone) and verify connectivity using Ping.

Manually configuring the ip address and changing the DNS 1

USING PING TOOLS APP TO ping default gateway and google.com to check connectivity :

Ping

google.com   **PING**

Ping google.com
ICMP

From maa03s40-in-x0e.1e100.net
Sequence **1**, size **64** bytes, ttl **59**   37 ms

From maa03s40-in-x0e.1e100.net
Sequence **2**, size **64** bytes, ttl **59**   37 ms

From maa03s40-in-x0e.1e100.net
Sequence **3**, size **64** bytes, ttl **59**   120 ms

Ping statistics:
3 transmitted, **3** received, **0**% packet loss
Total execution time **3415** ms

Time statistics:
Min **37** \ avg **64** \ max **120** \ mdev **47.9** ms