

Specifications

Insulation Resistance:	1,000M Ω min. at 500V DC
Dielectric Withstanding Voltage:	700V AC for 1 minute
Contact Resistance:	30m Ω max. at 10mA/20mV max.
Current Rating:	1A max.
Operating Temperature Range:	-40°C to +150°C
Mating Cycles:	10,000 insertions min.

Materials and Finish

Housing: Polyethersulphone (PES), Polyetherimide (PEI)
 Contacts: Beryllium Copper (BeCu)
 Plating: Gold over Nickel

Features

- ◇ Card thickness 1.27mm
- ◇ Kelvin type contact which utilizes both sides of the contact system
- ◇ Easy insertion and extraction by latch

Part Number (Details)

IC-176 - 4 - MF


Series No.

Design Number

MF = Flanged
 Unmarked = Not Flanged




Outline Socket Dimensions

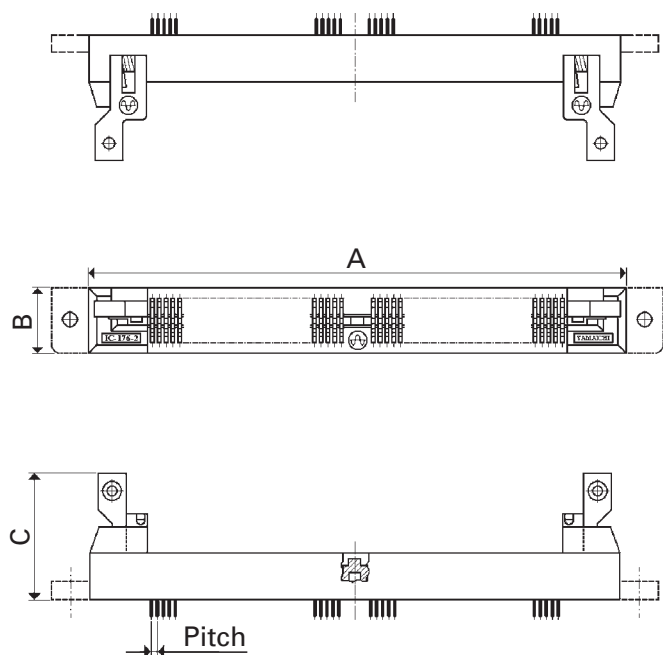


IC-176-2-**

Recommended PC Board Layout Top View from Socket

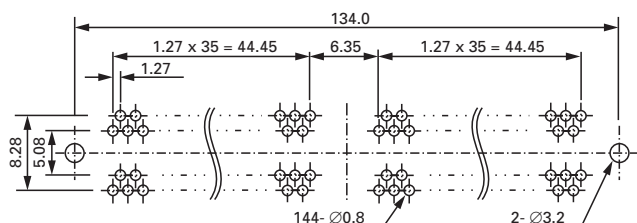

Matching IC Dimensions

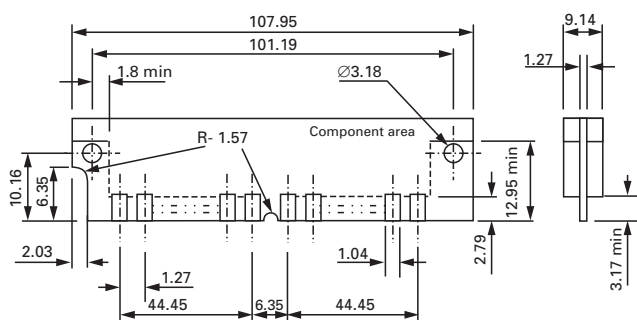

Part Number	Pin Count	Pitch	A	B	C
IC-176-4-**	30	2.54	100.0	9.0	30.0
IC-176-6-**	35	2.54	115.0	9.0	30.0
IC-176-8-**	64	1.27	115.0	15.0	30.0
IC-176-2-**	72	1.27	125.0	15.0	30.0
IC-176-10-**	100	1.27	161.4	17.0	30.0

Recommended PC Board Layout Top View from Socket

