


NEOWAY N706-EA

Industrial-grade Cellular LTE module



- Features an ARM Cortex-A5 processor with a clock frequency of 500 MHz, and a 32 KB I-cache and a 32 KB D-cache.
- Supports the LTE Cat.1 network standard, with a maximum downlink speed of 10 Mbps and a maximum uplink speed of 5 Mbps.
- Supports GNSS、WiFi scan、PCM、USIM、UART、I2C、I2S、USB2.0、SPI、ADC
- The N706-EA module is compatible with the N706-CB and N701-CA modules in terms of packaging.



Operating temperature

-30°C ~ +75°C

Extended temperature

-40°C ~ +85°C

N706-EA is a LTE Cat 1 industrial-grade cellular module based on the Uis8850 chip platform. It is specifically designed for M2M and IoT applications. The module supports FDD-LTE network standard. It has a compact form factor with dimensions of 15.80 mm × 17.70 mm × 2.45 mm. The N706-EA module offers a wide range of hardware interfaces, making it suitable for developing various IoT communication devices such as smart energy meters, vehicle trackers, IPC, POS, CPE, OTT, and DTU.



Various protocols

TCP, UDP, MQTT, FTP, HTTP/
HTTPS, SSL, TLS



Compact package


LGA 109 pin

15.8 mm x 17.7 mm x 2.45 mm




Technical support

Reference designs, evaluation kits
Timely support via emails, calls, and IM
Field support

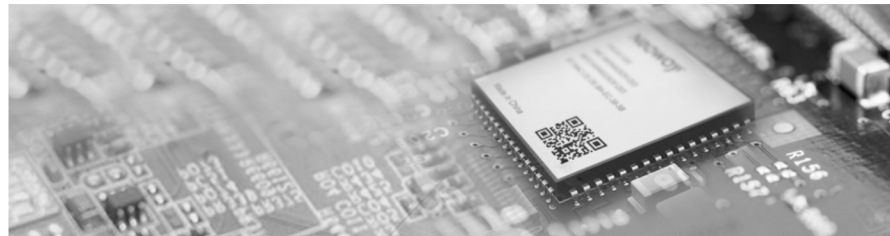

N706-EA

Industrial-grade Cellular LTE module



Specifications

Band	FDD-LTE: B1, B3, B5, B7, B8, B20, B28.
Supply voltage	3.4 to 4.2 V (DC), Typ.: 3.8 V
Operating temperature	-30°C to +75°C
CPU	ARM Cortex-A5 processor with a clock frequency of 500 MHz, and a 32 KB I-cache and a 32 KB D-cache.
Power consumption	< 3 mA @Sleep mode < 15 mA @Standby mode < 650 mA @Operating mode
Memory	RAM: 8 MB ROM: 8 MB or 4 MB
Speed rate	FDD-LTE: Cat 1, Max 10 Mbps (DL)/Max 5 Mbps (UL)
Driver	RNDIS, ECM, USB

Features

	3GPP Release 13
AT commands	Neoway extended commands
Network protocols	TCPUDP, MQTT, FTP, HTTP/HTTPS, SSL, TLS
Local upgrade	UART, USB
OTA	Supported

Application Interfaces

4G antenna, 50 Ω characteristic impedance

Three UART interfaces, one of which supports hardware flow control

One USIM interface, compatible with 1.8 V/3.0 V USIM cards

One USB2.0 high-speed interface

Two 10-bit ADC interfaces

Three SPI interfaces

Four GPIOs with interrupt

Two I2C interfaces (one for codec, one for sensor)

One I2S interface for codec

Certification Approvals

CE*, RoHS*, Reach*

* means under development

Neoway Technology Co., Ltd.

Technical support: support@neoway.com

For more information, please visit www.neoway.com

Copyright © 2023, Neoway Technology Co., Ltd. All rights reserved

