MODULE 5: STORAGE MANAGEMENT

-by
Asst Prof Rohini M. Sawant

FILE

- A file is a named collection of related information that is recorded on secondary storage.
- From a user's perspective, a file is the smallest allotment of logical secondary storage; that is, data cannot be written to secondary storage unless they are within a file.
- Commonly, files represent programs (both source and object forms) and data.
- Data files may be numeric, alphabetic, alphanumeric, or binary. Files may be free form, such as text files, or may be formatted rigidly.
- In general, a file is a sequence of bits, bytes, lines, or records, the meaning of which is defined by the file's creator and user.
- The information in a file is defined by its creator. Many different types of information may be stored in a file—source or executable programs, numeric or text data, photos, music, video, and so on.

File Concept

Types:

- Data
  - Numeric
  - Character
  - Binary
- Program

- Contents defined by file's creator
  - Many types
    - **text file,**
    - **source file,**
    - **executable file**

FILE SYSTEM

- For most users, the file system is the most visible aspect of a general-purpose operating system.
- It provides the mechanism for on-line storage of and access to both data and programs of the operating system and all the users of the computer system.
- The file system consists of two distinct parts: a collection of files, each storing related data, and a directory structure, which organizes and provides information about all the files in the system.
- Most file systems live on storage devices

File Attributes

- **Name** – only information kept in human-readable form
- **Identifier** – unique tag (number) identifies file within file system
- **Type** – needed for systems that support different types
- **Location** – pointer to file location on device
- **Size** – current file size
- **Protection** – controls who can do reading, writing, executing
- **Time, date, and user identification** – data for protection, security, and usage monitoring
- Many variations, including extended file attributes such as file checksum

File info Window on Mac OS X

File Operations

- **Creating a file-** Two steps are necessary to create a file. First, space in the file system must be found for the file. Second, an entry for the new file must be made in a directory.
- **Opening a file-** Rather than have all file operations specify a file name, causing the operating system to evaluate the name, check access permissions, and so on, all operations except create and delete require a file open() first. If successful, the open call returns a file handle that is used as an argument in the other calls.
- **Writing a file-** To write a file, we make a system call specifying both the open file handle and the information to be written to the file. The system must keep a write pointer to the location in the file where the next write is to take place if it is sequential. The write pointer must be updated whenever a write occurs.
- **Reading a file-** To read from a file, we use a system call that specifies the file handle and where (in memory) the next block of the file should be put. Again, the system needs to keep a read pointer to the location in the file where the next read is to take place, if sequential

File Operations

- **Repositioning within a file-** The current-file-position pointer of the open file is repositioned to a given value. Repositioning within a file need not involve any actual I/O. This file operation is also known as a file seek.
- **Deleting a file-** To delete a file, we search the directory for the named file. Having found the associated directory entry, we release all file space, so that it can be reused by other files, and erase or mark as free the directory entry.
- **Truncating a file-** The user may want to erase the contents of a file but keep its attributes. Rather than forcing the user to delete the file and then recreate it, this function allows all attributes to remain unchanged—except for file length. The file can then be reset to length zero, and its file space can be released.

Open Files

- Several pieces of data are needed to manage open files:
  - **Open-file table**: tracks open files
  - File pointer: pointer to last read/write location, per process that has the file open
  - **File-open count**: counter of number of times a file is open – to allow removal of data from open-file table when last processes closes it
  - Disk location of the file: cache of data access information
  - Access rights: per-process access mode information

File Locking

- Provided by some operating systems and file systems
  - Similar to reader-writer locks
  - **Shared lock** similar to reader lock – several processes can acquire concurrently
  - **Exclusive lock** similar to writer lock
- Mediates access to a file
- Mandatory or advisory:
  - **Mandatory** – access is denied depending on locks held and requested
  - **Advisory** – processes can find status of locks and decide what to do

File Types – Name, Extension

file type	usual extension	function
executable	exe, com, bin or none	ready-to-run machine-language program
object	obj, o	compiled, machine language, not linked
source code	c, cc, java, pas, asm, a	source code in various languages
batch	bat, sh	commands to the command interpreter
text	txt, doc	textual data, documents
word processor	wp, tex, rtf, doc	various word-processor formats
library	lib, a, so, dll	libraries of routines for programmers
print or view	ps, pdf, jpg	ASCII or binary file in a format for printing or viewing
archive	arc, zip, tar	related files grouped into one file, sometimes compressed, for archiving or storage
multimedia	mpeg, mov, rm, mp3, avi	binary file containing audio or A/V information

Access Methods

- A file is fixed length **logical records.** Files store information. When it is used, this information must be accessed and read into computer memory. The information in the file can be accessed in several ways. Some systems provide only one access method for files. Others (such as mainframe operating systems) support many access methods, and choosing the right one for a particular application is a major design problem.
- **Sequential Access**
- **Direct Access**
- **Other Access Methods**

Sequential Access

- The simplest access method is sequential access. Information in the file is processed in order, one record after the other.
- This mode of access is by far the most common; for example, editors and compilers usually access files in this fashion. Reads and writes make up the bulk of the operations on a file.
- A read operation—read next()—reads the next portion of the file and automatically advances a file pointer, which tracks the I/O location. Similarly, the write operation—write next()—appends to the end of the file and advances to the end of the newly written material (the new end of file).
- Such a file can be reset to the beginning, and on some systems, a program may be able to skip forward or backward n records for some integer n.
- Sequential access, which is depicted in Figure 13.4, is based on a tape model of a file and works as well on sequential-access devices as it does on random-access ones.

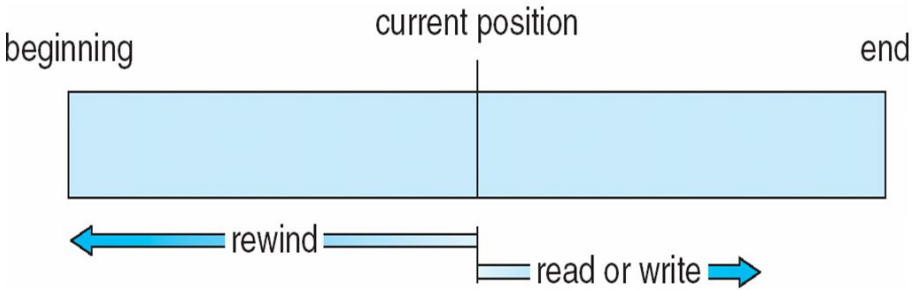

Direct Access

- Operations
  - `read n`
  - `write n`
  - `position to n`
    - `read next`
    - `write next`
    - `rewrite n`

  n = **relative block number**

- Relative block numbers allow OS to decide where file should be placed

Simulation of Sequential Access on Direct-access File

sequential access	implementation for direct access
reset	$cp = 0;$
read next	*read cp*; $cp = cp + 1;$
write next	*write cp*; $cp = cp + 1;$

Other Access Methods

- Can be other access methods built on top of base methods
- General involve creation of an **index** for the file
- Keep index in memory for fast determination of location of data to be operated on (consider Universal Produce Code (UPC code) plus record of data about that item)
- If the index is too large, create an in-memory index, which an index of a disk index
- IBM indexed sequential-access method (ISAM)
  - Small master index, points to disk blocks of secondary index
  - File kept sorted on a defined key
  - All done by the OS
- VMS operating system provides index and relative files as another example (see next slide)

Example of Index and Relative Files

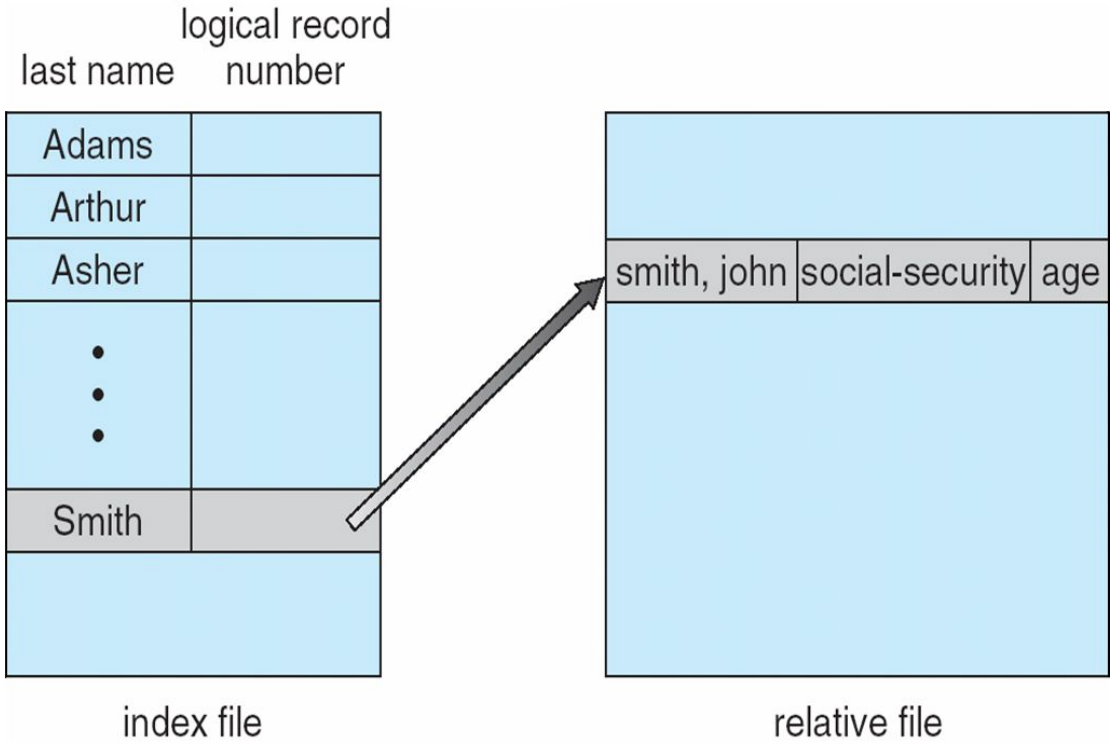

DIRECTORY

- The directory can be viewed as a symbol table that translates file names into their file control blocks.
- If we take such a view, we see that the directory itself can be organized in many ways.
- The organization must allow us to insert entries, to delete entries, to search for a named entry, and to list all the entries in the directory.
- In this section, we examine several schemes for defining the logical structure of the directory system.

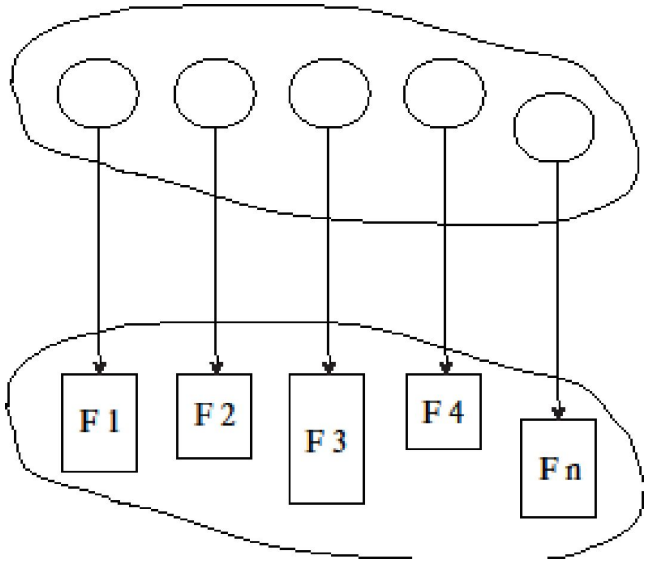

DIRECTORY OPERATIONS

- **Search for a file-** We need to be able to search a directory structure to find the entry for a particular file. Since files have symbolic names, and similar names may indicate a relationship among files, we may want to be able to find all files whose names match a particular pattern.
- **Create a file-** New files need to be created and added to the directory.
- **Delete a file-**When a file is no longer needed, we want to be able to remove it from the directory. Note a delete leaves a hole in the directory structure and the file system may have a method to defragment the directory structure.
- **List a directory-** We need to be able to list the files in a directory and the contents of the directory entry for each file in the list.
- **Rename a file-** Because the name of a file represents its contents to its users, we must be able to change the name when the contents or use of the file changes. Renaming a file may also allow its position within the directory structure to be changed.
- **Traverse the file system-** We may wish to access every directory and every file within a directory structure. For reliability, it is a good idea to save the contents and structure of the entire file system at regular intervals. Often, we do this by copying all files to magnetic tape, other secondary storage, or across a network to another system or the cloud. This technique provides a backup copy in case of system failure. In addition, if a file is no longer in use, the file can be copied the backup target and the disk space of that file released for reuse by another file.

TYPES OF DIRECTORIES

13.3.1 Single-Level Directory

The simplest directory structure is the single-level directory. All files are contained in the same directory, which is easy to support and understand (Figure 13.7

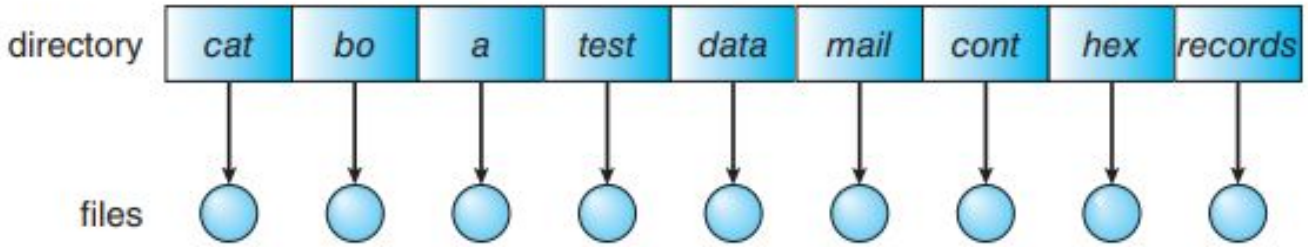

Figure 13.7 Single-level directory.

A single-level directory has significant limitations, however, when the number of files increases or when the system has more than one user. Since all files are in the same directory, they must have unique names. If two users call their data file `test.txt`, then the unique-name rule is violated. For example, in one programming class, 23 students called the program for their second assignment `prog2.c`; another 11 called it `assign2.c`. Fortunately, most file systems support file names of up to 255 characters, so it is relatively easy to select unique file names.

Even a single user on a single-level directory may find it difficult to remember the names of all the files as the number of files increases. It is not uncommon for a user to have hundreds of files on one computer system and an equal number of additional files on another system. Keeping track of so many files is a daunting task.

13.3.2 Two-Level Directory

As we have seen, a single-level directory often leads to confusion of file names among different users. The standard solution is to create a separate directory for each user.

In the two-level directory structure, each user has his own **user fil directory** (UFD). The UFDs have similar structures, but each lists only the files of a single user. When a user job starts or a user logs in, the system's **master fil directory** (MFD) is searched. The MFD is indexed by user name or account number, and each entry points to the UFD for that user (Figure 13.8).

When a user refers to a particular file, only his own UFD is searched. Thus, different users may have files with the same name, as long as all the file names within each UFD are unique. To create a file for a user, the operating system searches only that user's UFD to ascertain whether another file of that name

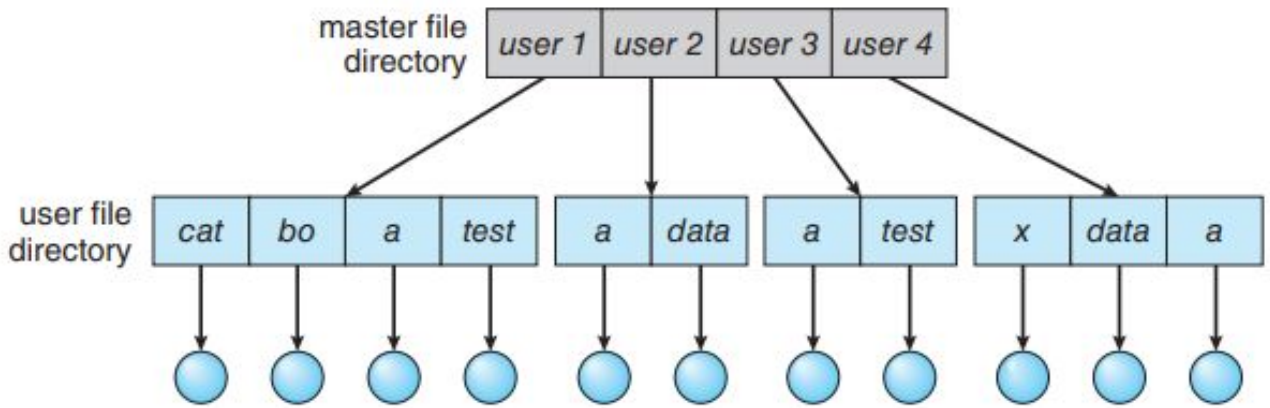

Figure 13.8 Two-level directory structure.

exists. To delete a file, the operating system confines its search to the local UFD; thus, it cannot accidentally delete another user's file that has the same name.

The user directories themselves must be created and deleted as necessary.

13.3.3 Tree-Structured Directories

Once we have seen how to view a two-level directory as a two-level tree, the natural generalization is to extend the directory structure to a tree of arbitrary height (Figure 13.9). This generalization allows users to create their own subdirectories and to organize their files accordingly. A tree is the most common directory structure. The tree has a root directory, and every file in the system has a unique path name.

A directory (or subdirectory) contains a set of files or subdirectories. In many implementations, a directory is simply another file, but it is treated in a special way. All directories have the same internal format. One bit in each directory entry defines the entry as a file (0) or as a subdirectory (1). Special system calls are used to create and delete directories. In this case the operating system (or the file system code) implements another file format, that of a directory.

In normal use, each process has a current directory. The **current directory** should contain most of the files that are of current interest to the process. When reference is made to a file, the current directory is searched. If a file is needed that is not in the current directory, then the user usually must either specify a path name or change the current directory to be the directory holding that file. To change directories, a system call could be provided that takes a directory name as a parameter and uses it to redefine the current directory. Thus, the user can change her current directory whenever she wants. Other systems leave it to the application (say, a shell) to track and operate on a current directory, as each process could have different current directories.

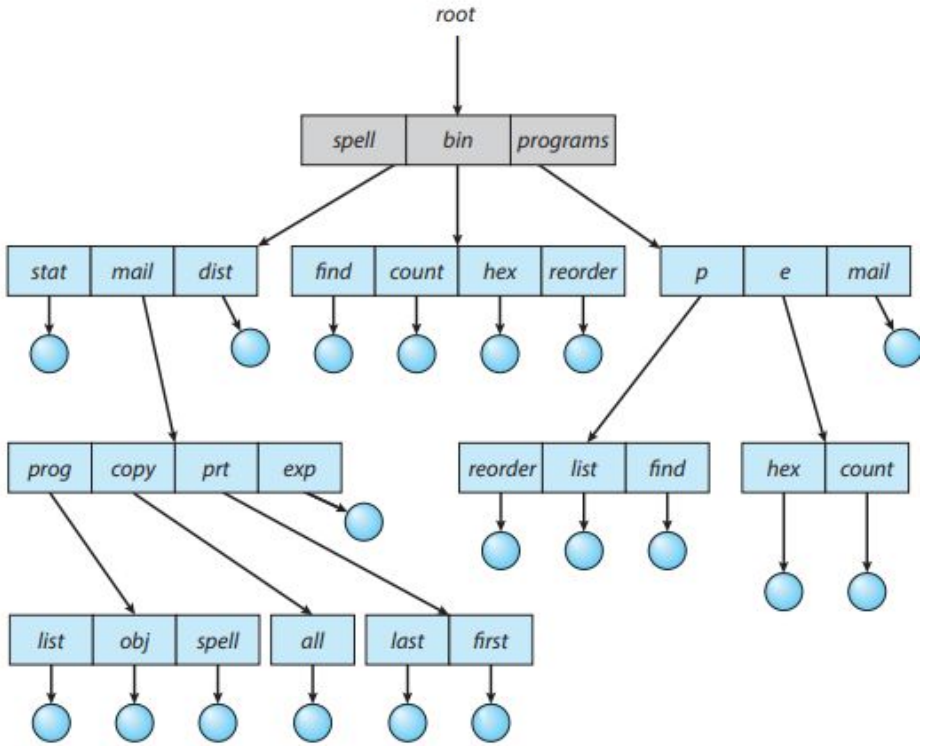

Figure 13.9 Tree-structured directory structure.

PATH NAMES

a user name and a file name define a **path name**. Every file in the system has a path name. To name a file uniquely, a user must know the path name of the file desired.

For example, if user A wishes to access her own test file named `test.txt`, she can simply refer to `test.txt`. To access the file named `test.txt` of user B (with directory-entry name `userb`), however, she might have to refer to `/userb/test.txt`. Every system has its own syntax for naming files in directories other than the user's own.

Path names can be of two types: absolute and relative. In UNIX and Linux, an **absolute path name** begins at the root (which is designated by an initial "/") and follows a path down to the specified file, giving the directory names on the path. A **relative path name** defines a path from the current directory. For example, in the tree-structured file system of Figure 13.9, if the current directory is `/spell/mail`, then the relative path name `prt/first` refers to the same file as does the absolute path name `/spell/mail/prt/first`.

Partitions and Mounting

- Partition can be a volume containing a file system ("cooked") or **raw** – just a sequence of blocks with no file system
- Boot block can point to boot volume or boot loader set of blocks that contain enough code to know how to load the kernel from the file system
  - Or a boot management program for multi-os booting
- **Root partition** contains the OS, other partitions can hold other OSes, other file systems, or be raw
  - Mounted at boot time
  - Other partitions can mount automatically or manually on **mount points** – location at which they can be accessed
- At mount time, file system consistency checked
  - Is all metadata correct?
    - If not, fix it, try again
    - If yes, add to mount table, allow access

File Systems and Mounting

(a) Unix-like file system directory tree

(a) Unmounted file system

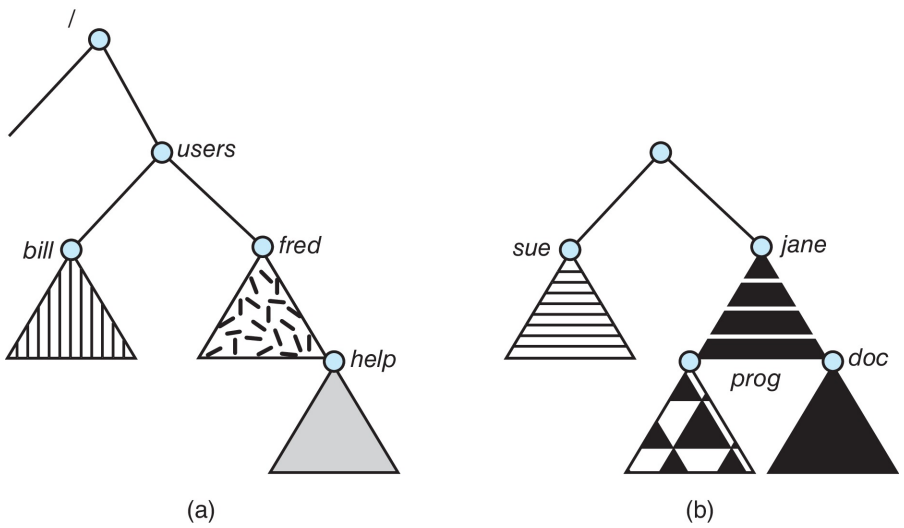

After mounting (b) into the existing directory tree

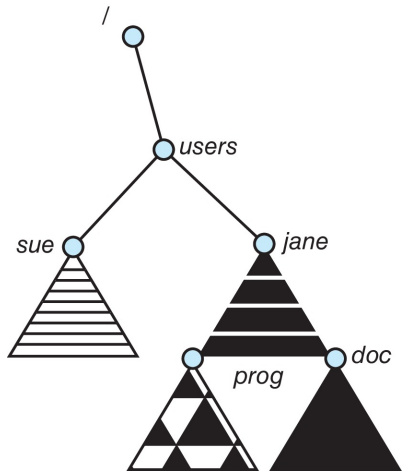

File Sharing

- Allows multiple users / systems access to the same files
- Permissions / protection must be implemented and accurate
  - Most systems provide concepts of owner, group member
  - Must have a way to apply these between systems

The Sun Network File System (NFS)

- An implementation and a specification of a software system for accessing remote files across LANs (or WANs)
- The implementation originally part of SunOS operating system, now industry standard / very common
- Can use unreliable datagram protocol (UDP/IP) or TCP/IP, over Ethernet or other networks

NFS (Cont.)

- Interconnected workstations viewed as a set of independent machines with independent file systems, which allows sharing among these file systems in a transparent manner
  - A remote directory is mounted over a local file system directory
    - The mounted directory looks like an integral subtree of the local file system, replacing the subtree descending from the local directory
  - Specification of the remote directory for the mount operation is nontransparent; the host name of the remote directory has to be provided
    - Files in the remote directory can then be accessed in a transparent manner
  - Subject to access-rights accreditation, potentially any file system (or directory within a file system), can be mounted remotely on top of any local directory

NFS (Cont.)

- NFS is designed to operate in a heterogeneous environment of different machines, operating systems, and network architectures; the NFS specifications independent of these media
- This independence is achieved through the use of RPC primitives built on top of an External Data Representation (XDR) protocol used between two implementation-independent interfaces
- The NFS specification distinguishes between the services provided by a mount mechanism and the actual remote-file-access services

NFS Mounting Example

- Three independent file systems

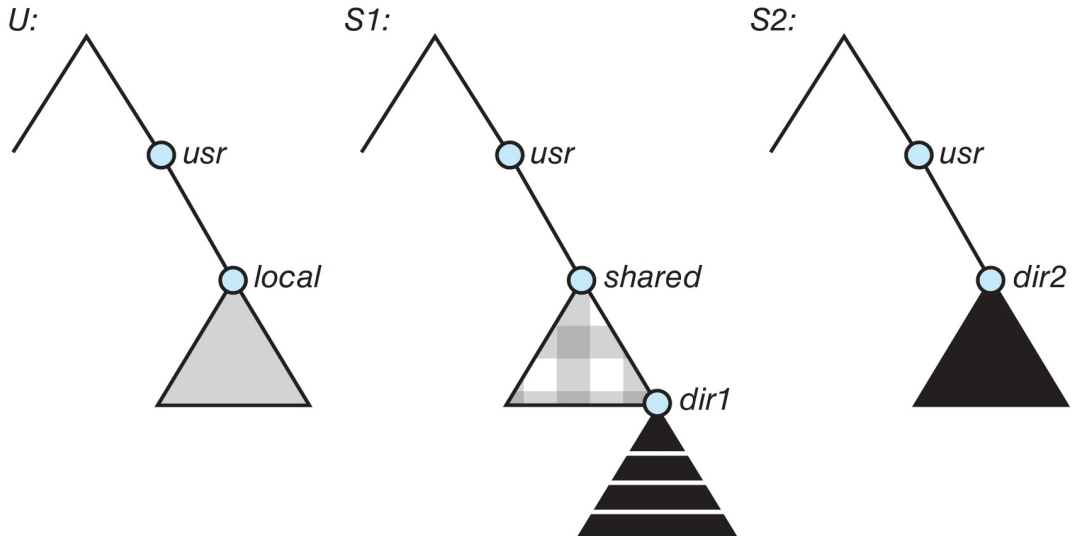

NFS Mounting Example (Cont.)

- Mounts and cascading mounts

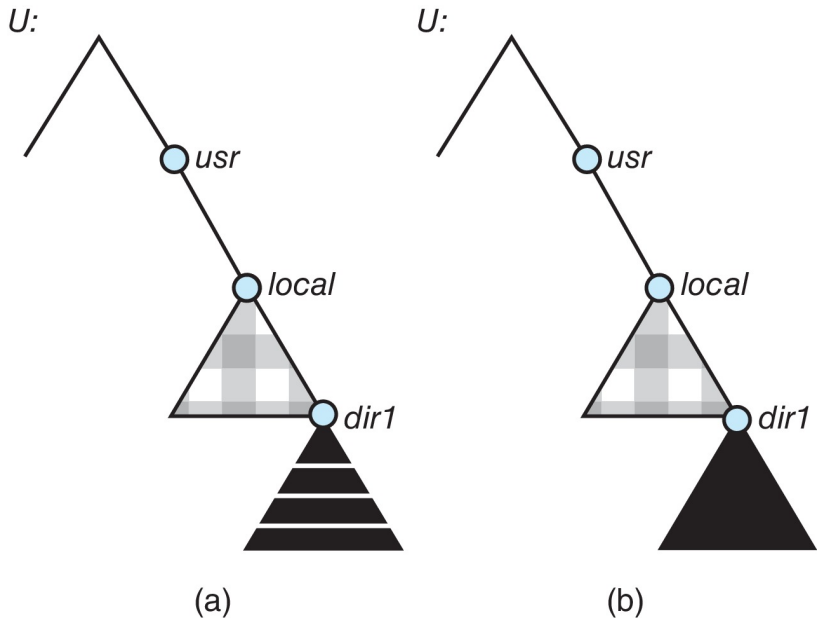

Mounts Cascading mounts

NFS Mount Protocol

- Establishes initial logical connection between server and client
- Mount operation includes name of remote directory to be mounted and name of server machine storing it
  - Mount request is mapped to corresponding RPC and forwarded to mount server running on server machine
  - Export list – specifies local file systems that server exports for mounting, along with names of machines that are permitted to mount them
- Following a mount request that conforms to its export list, the server returns a file handle—a key for further accesses
- File handle – a file-system identifier, and an inode number to identify the mounted directory within the exported file system
- The mount operation changes only the user's view and does not affect the server side

Allocation Method

- An allocation method refers to how disk blocks are allocated for files:
  - Contiguous
  - Linked
  - File Allocation Table (FAT)

Contiguous Allocation Method

- An allocation method refers to how disk blocks are allocated for files:
- Each file occupies set of contiguous blocks
  - Best performance in most cases
  - Simple – only starting location (block #) and length (number of blocks) are required
  - Problems include:
    - Finding space on the disk for a file,
    - Knowing file size,
    - External fragmentation, need for **compaction off-line** (**downtime**) or **on-line**

Contiguous Allocation (Cont.)

- Mapping from logical to physical (block size =512 bytes)
- Block to be accessed = starting address + Q
- Displacement into block = R

LA/512 → Q, R

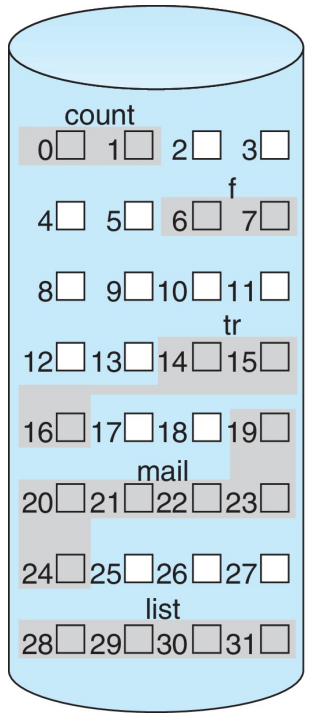

directory

file	start	length
count	0	2
tr	14	3
mail	19	6
list	28	4
f	6	2

Extent-Based Systems

- Many newer file systems (i.e., Veritas File System) use a modified contiguous allocation scheme
- Extent-based file systems allocate disk blocks in extents
- An **extent** is a contiguous block of disks
  - Extents are allocated for file allocation
  - A file consists of one or more extents

Linked Allocation

- Each file is a linked list of blocks
- File ends at nil pointer
- No external fragmentation
- Each block contains pointer to next block
- No compaction, external fragmentation
- Free space management system called when new block needed
- Improve efficiency by clustering blocks into groups but increases internal fragmentation
- Reliability can be a problem
- Locating a block can take many I/Os and disk seeks

Linked Allocation Example

- Each file is a linked list of disk blocks: blocks may be scattered anywhere on the disk
- Scheme

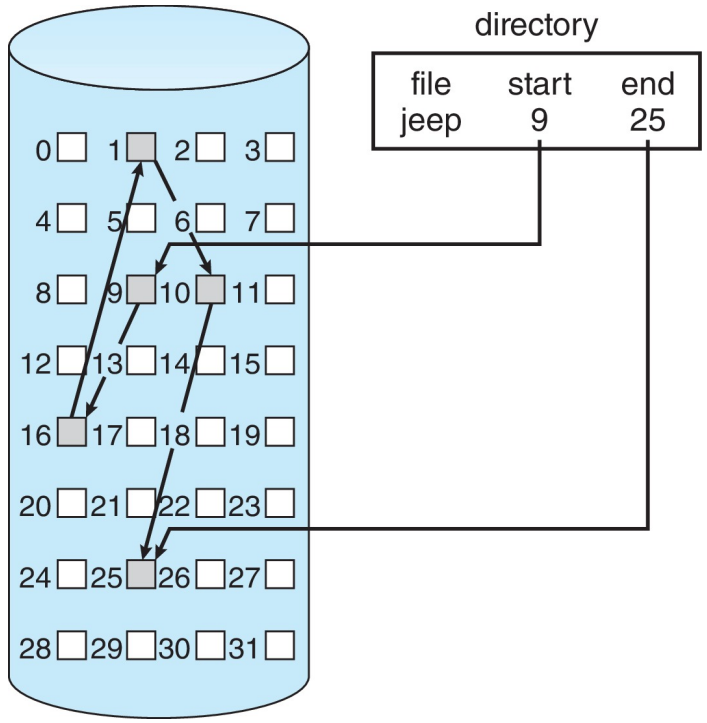

Linked Allocation (Cont.)

- Mapping

- Block to be accessed is the Q^{th} block in the linked chain of blocks representing the file.
- Displacement into block = R + 1

FAT Allocation Method

- Beginning of volume has table, indexed by block number
- Much like a linked list, but faster on disk and cacheable
- New block allocation simple

File-Allocation Table

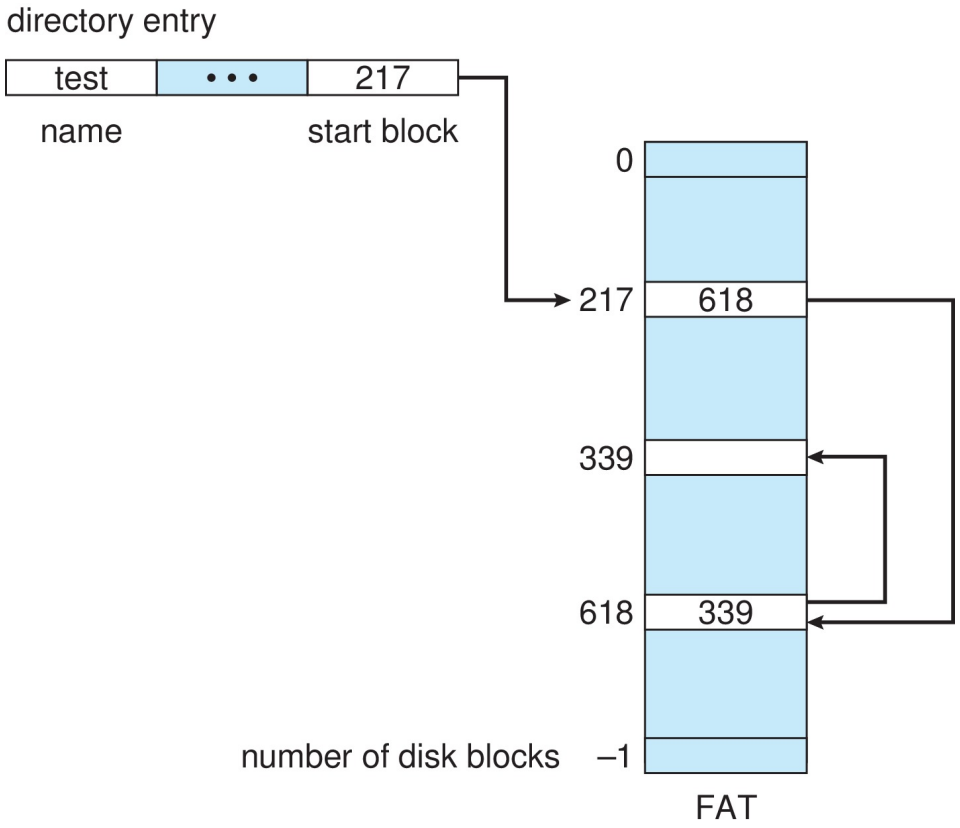

Indexed Allocation Method

- Each file has its own **index block**(s) of pointers to its data blocks
- Logical view

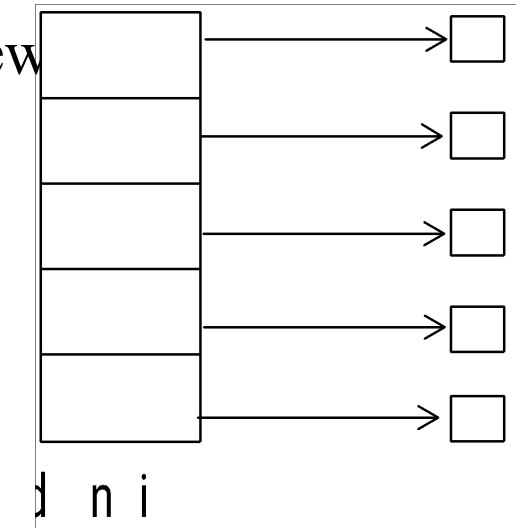

Example of Indexed Allocation

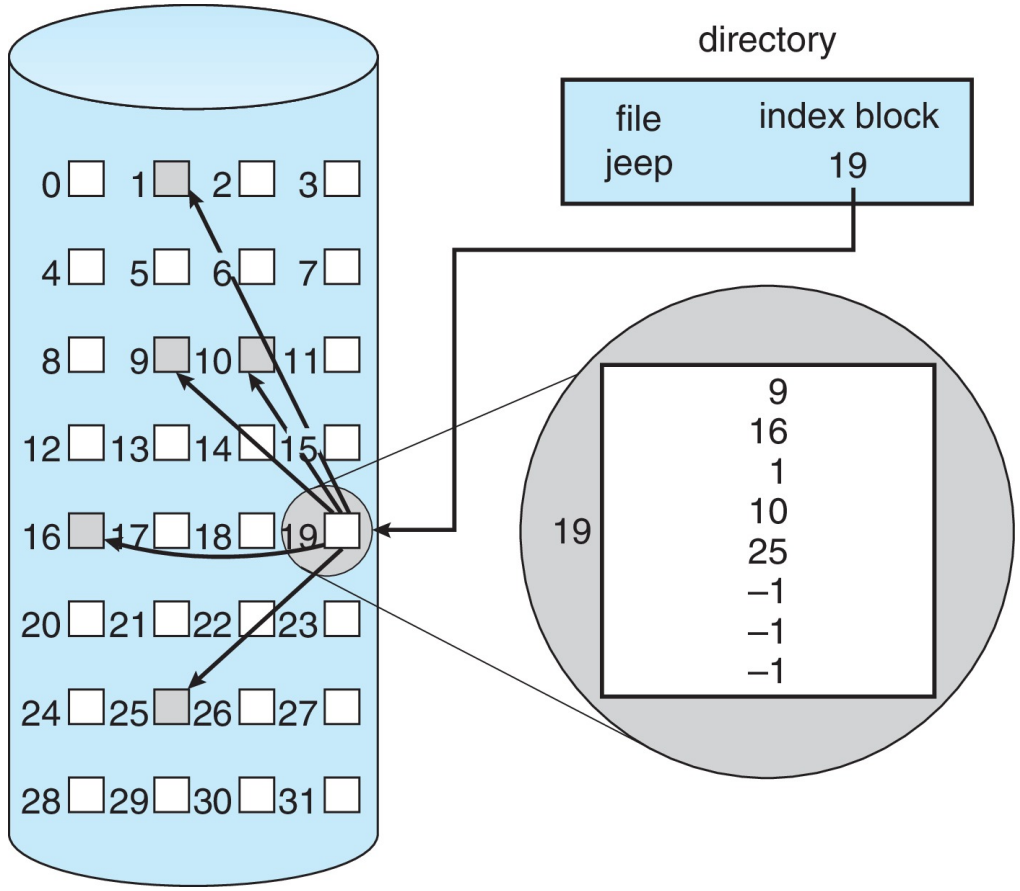

Indexed Allocation – Small Files

- Need index table
- Random access
- Dynamic access without external fragmentation, but have overhead of index block
- Mapping from logical to physical in a file of maximum size of 256K bytes and block size of 512 bytes. We need only 1 block for index table



Calculation:

- Q = displacement into index table
- R = displacement into block

Indexed Allocation – Large Files

- Mapping from logical to physical in a file of unbounded length (block size of 512 words)
  - Linked scheme – Link blocks of index table (no limit on size)
  - Multi-level indexing

Indexed Allocation – Linked Scheme

- Link blocks of index table (no limit on size)

- Outer-level mapping scheme
  - Q_1 = block of index table
  - R_1 is used as follows

  - Inner-level mapping scheme
    - Q_2 = displacement into block of index table
    - R_2 displacement into block of file

Indexed Allocation – Two-level Scheme

- Two-level index (4K blocks could store 1,024 four-byte pointers in outer index -> 1,048,567 data blocks and file size of up to 4GB)

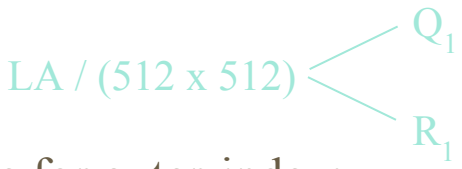

- Mapping scheme for outer-index:
  - Q_1 = displacement into outer-index
  - R_1 is used as follows:



  - Mapping scheme for index level:
    - Q_2 = displacement into block of index table
    - R_2 displacement into block of file

Indexed Allocation – Two-Level Scheme

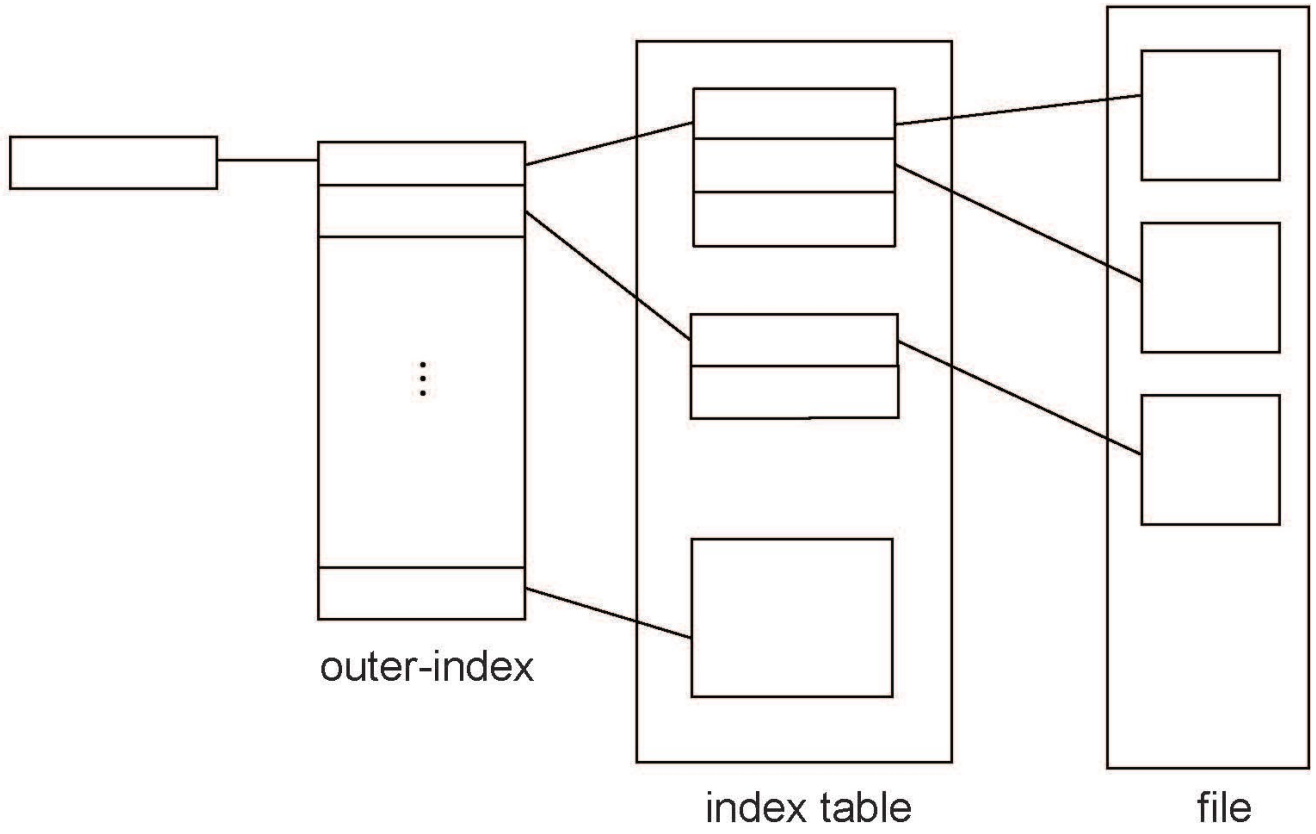

Free-Space Management

- File system maintains **free-space list** to track available blocks/clusters
  - (Using term "block" for simplicity)
- **Bit vector** or **bit map** (***n*** blocks)

bit[*i*] =
- 1 ⇒ block[*i*] free
- 0 ⇒ block[*i*] occupied

Block number calculation

(number of bits per word) *
(number of 0-value words) +
offset of first 1 bit

CPUs have instructions to return offset within word of first "1" bit

Free-Space Management

- File system maintains **free-space list** to track available blocks
- **Bit vector** or **bit map** (***n*** blocks)

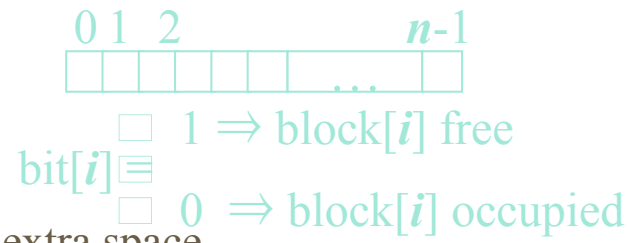

- Bit map requires extra space
  - Example:

    block size = 4KB = 2^{12} bytes

    disk size = 2^{40} bytes (1 terabyte)

    $n = 2^{40}/2^{12} = 2^{28}$ bits (or 32MB)

    if clusters of 4 blocks -> 8MB of memory

- Easy to get contiguous files

Overview of Mass Storage Structure

- Bulk of secondary storage for modern computers is **hard disk drives** (**HDDs**) and **nonvolatile memory** (**NVM**) devices
- **HDDs** spin platters of magnetically-coated material under moving read-write heads
  - Drives rotate at 60 to 250 times per second
  - **Transfer rate** is rate at which data flow between drive and computer
  - **Positioning time** (**random-access time**) is time to move disk arm to desired cylinder (**seek time**) and time for desired sector to rotate under the disk head (**rotational latency**)
  - **Head crash** results from disk head making contact with the disk surface -- That's bad
- Disks can be removable

Moving-head Disk Mechanism

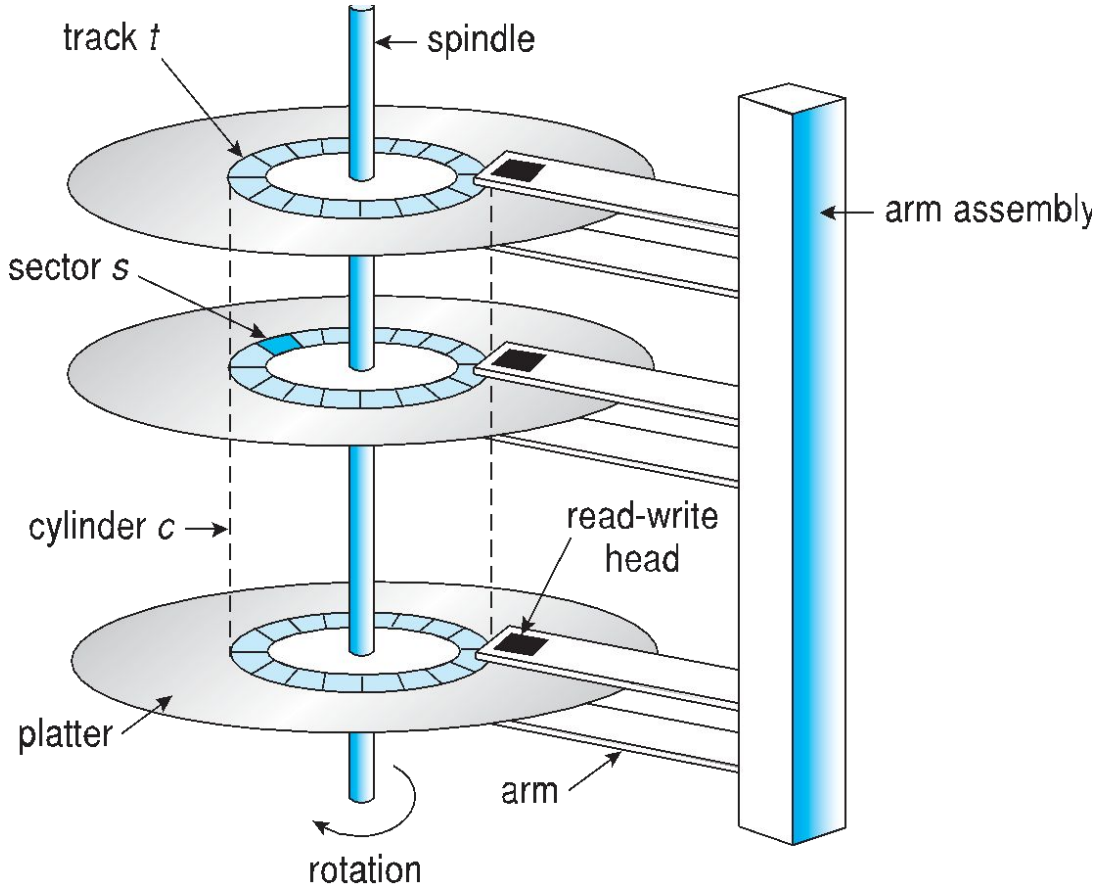

Hard Disk Drives

- Platters range from .85” to 14” (historically)
  - Commonly 3.5”, 2.5”, and 1.8”
- Range from 30GB to 3TB per drive
- Performance
  - Transfer Rate – theoretical – 6 Gb/sec
  - Effective Transfer Rate – real – 1Gb/sec
  - Seek time from 3ms to 12ms – 9ms common for desktop drives
  - Average seek time measured or calculated based on 1/3 of tracks
  - Latency based on spindle speed
    - 1 / (RPM / 60) = 60 / RPM
  - Average latency = ½ latency

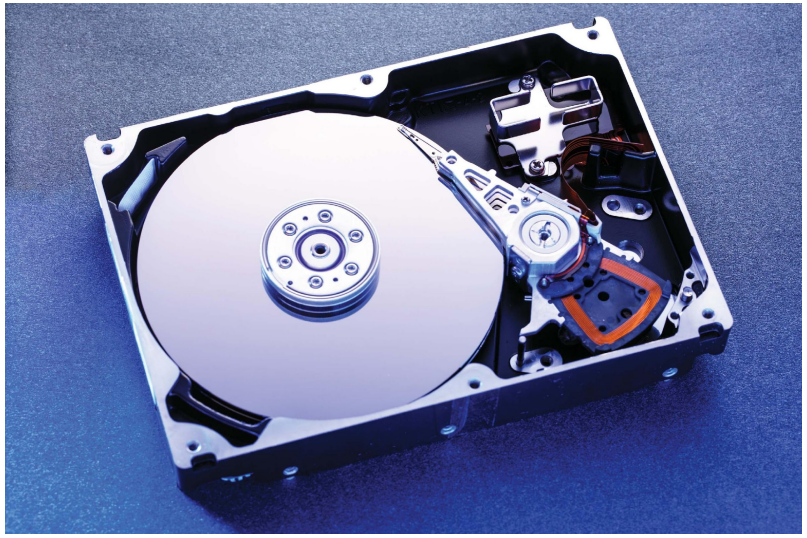

Hard Disk Performance

- **Access Latency** = **Average access time** = average seek time + average latency
  - For fastest disk 3ms + 2ms = 5ms
  - For slow disk 9ms + 5.56ms = 14.56ms
- Average I/O time = average access time + (amount to transfer / transfer rate) + controller overhead
- For example to transfer a 4KB block on a 7200 RPM disk with a 5ms average seek time, 1Gb/sec transfer rate with a .1ms controller overhead =
  - 5ms + 4.17ms + 0.1ms + transfer time =
  - Transfer time = 4KB / 1Gb/s * 8Gb / GB * 1GB / 1024^2KB = 32 / (1024^2) = 0.031 ms
  - Average I/O time for 4KB block = 9.27ms + .031ms = 9.301ms

Disk Scheduling (Cont.)

- There are many sources of disk I/O request
  - OS
  - System processes
  - Users processes
- I/O request includes input or output mode, disk address, memory address, number of sectors to transfer
- OS maintains queue of requests, per disk or device
- Idle disk can immediately work on I/O request, busy disk means work must queue
  - Optimization algorithms only make sense when a queue exists
- In the past, operating system responsible for queue management, disk drive head scheduling
  - Now, built into the storage devices, controllers
  - Just provide LBAs, handle sorting of requests
    - Some of the algorithms they use described next

Disk Scheduling (Cont.)

- Note that drive controllers have small buffers and can manage a queue of I/O requests (of varying “depth”)
- Several algorithms exist to schedule the servicing of disk I/O requests
- The analysis is true for one or many platters
- We illustrate scheduling algorithms with a request queue (0-199)

  98, 183, 37, 122, 14, 124, 65, 67

  Head pointer 53

FCFS

Illustration shows total head movement of 640 cylinders

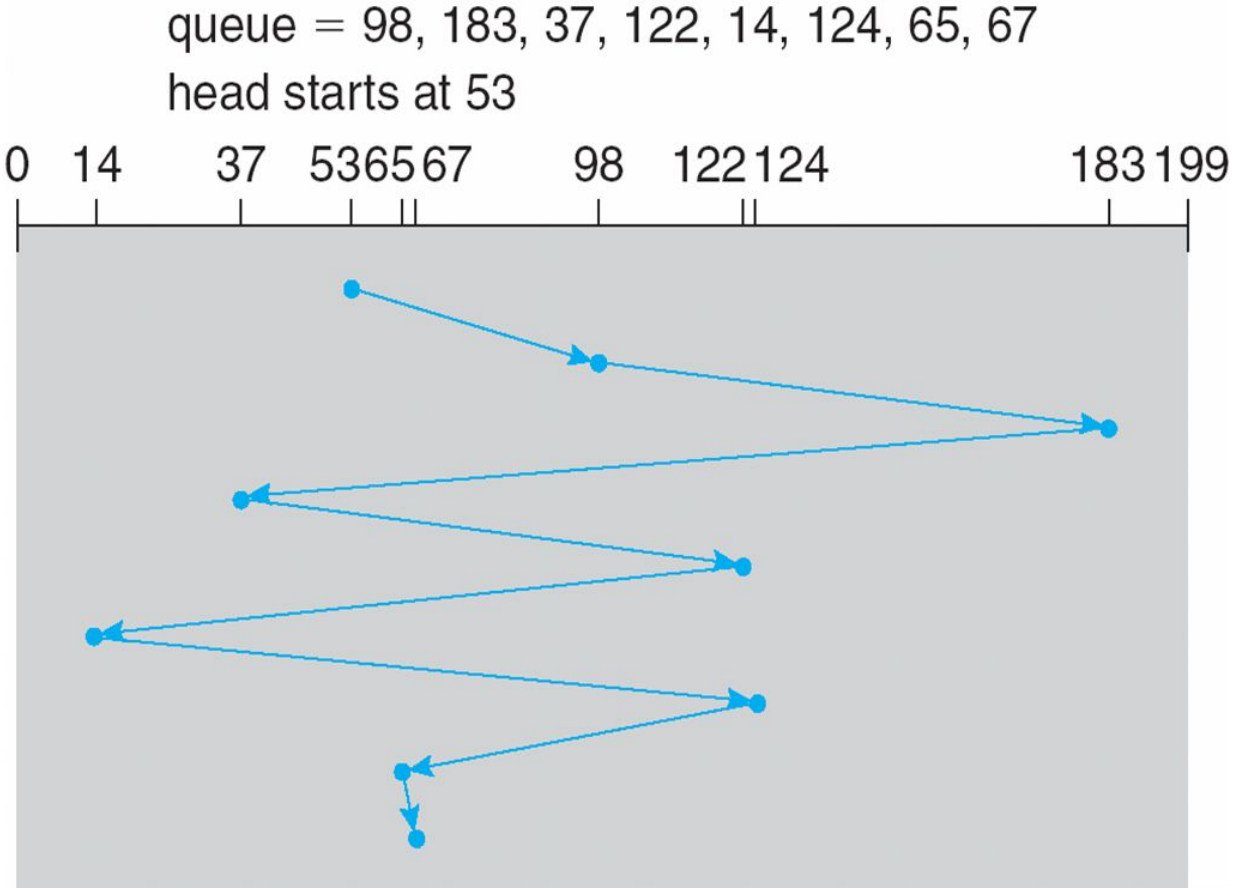

SCAN

- The disk arm starts at one end of the disk, and moves toward the other end, servicing requests until it gets to the other end of the disk, where the head movement is reversed and servicing continues.
- **SCAN algorithm** Sometimes called the **elevator algorithm**
- Illustration shows total head movement of 208 cylinders
- But note that if requests are uniformly dense, largest density at other end of disk and those wait the longest

SCAN (Cont.)

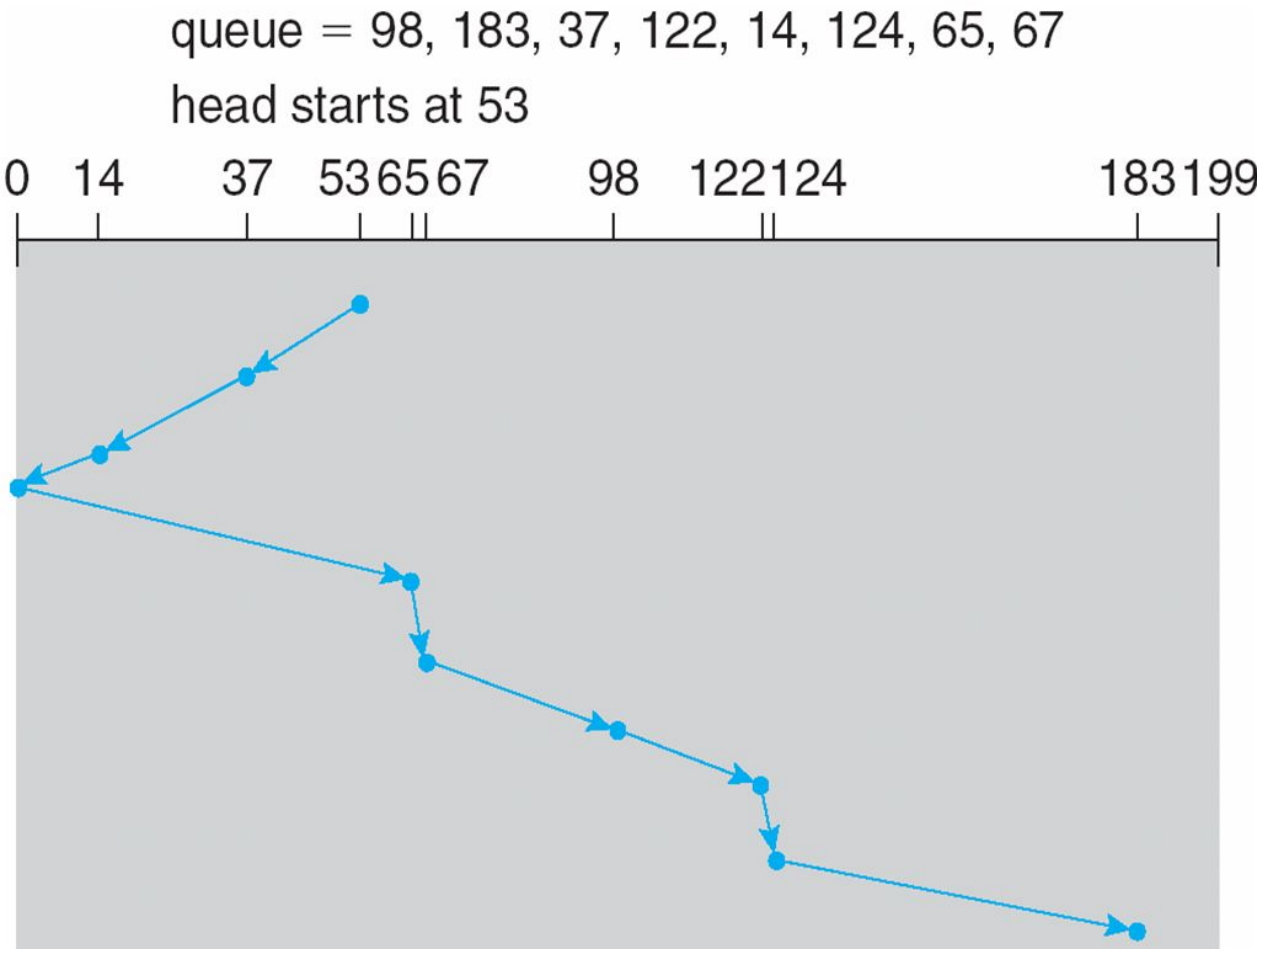
queue = 98, 183, 37, 122, 14, 124, 65, 67
head starts at 53
0 14 37 53 65 67 98 122 124 183 199

C-SCAN

- Provides a more uniform wait time than SCAN
- The head moves from one end of the disk to the other, servicing requests as it goes
  - When it reaches the other end, however, it immediately returns to the beginning of the disk, without servicing any requests on the return trip
- Treats the cylinders as a circular list that wraps around from the last cylinder to the first one
- Total number of cylinders?

C-SCAN (Cont.)

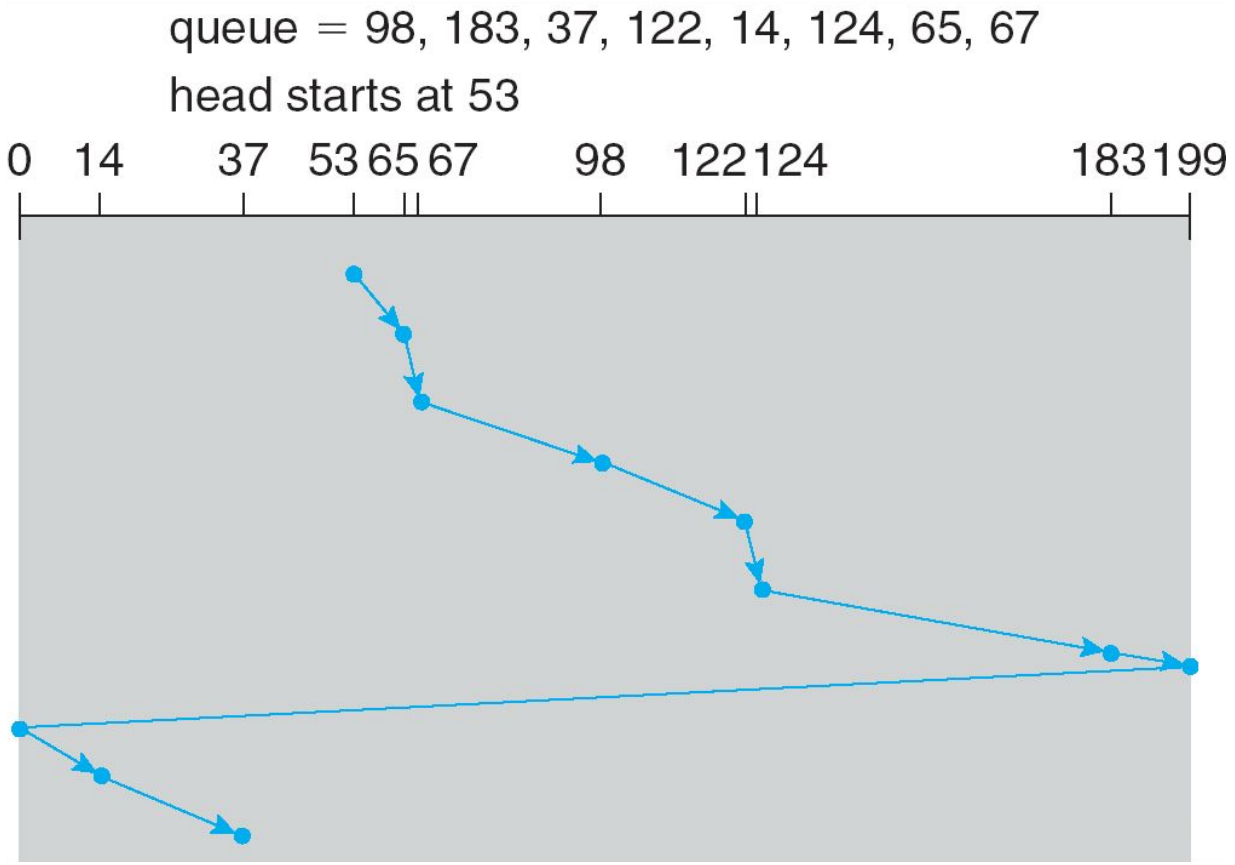
queue = 98, 183, 37, 122, 14, 124, 65, 67
head starts at 53
0
14
37
53
65
67
98
122
124
183
199

Selecting a Disk-Scheduling Algorithm

- SSTF is common and has a natural appeal
- SCAN and C-SCAN perform better for systems that place a heavy load on the disk
  - Less starvation, but still possible
- To avoid starvation Linux implements **deadline** scheduler
  - Maintains separate read and write queues, gives read priority
    - Because processes more likely to block on read than write
  - Implements four queues: 2 x read and 2 x write
    - 1 read and 1 write queue sorted in LBA order, essentially implementing C-SCAN
    - 1 read and 1 write queue sorted in FCFS order
    - All I/O requests sent in batch sorted in that queue's order
    - After each batch, checks if any requests in FCFS older than configured age (default 500ms)
      - If so, LBA queue containing that request is selected for next batch of I/O
- In RHEL 7 also **NOOP** and **completely fair queueing** scheduler (**CFQ**) also available, defaults vary by storage device

RAID Structure

- **RAID – redundant array of inexpensive disks**
  - multiple disk drives provides reliability via **redundancy**
- Increases the **mean time to failure**
- **Mean time to repair –** exposure time when another failure could cause data loss
- **Mean time to data loss** based on above factors
- If mirrored disks fail independently, consider disk with 1300,000 **mean time to failure** and 10 hour mean time to repair
  - Mean time to data loss is $100,000^2 / (2 * 10) = 500 * 10^6$ hours, or 57,000 years!
- Frequently combined with **NVRAM** to improve write performance

- Several improvements in disk-use techniques involve the use of multiple disks working cooperatively

RAID (Cont.)

- Disk **striping** uses a group of disks as one storage unit
- RAID is arranged into six different levels
- RAID schemes improve performance and improve the reliability of the storage system by storing redundant data
  - **Mirroring** or **shadowing** (**RAID 1**) keeps duplicate of each disk
  - Striped mirrors (**RAID 1+0**) or mirrored stripes (**RAID 0+1**) provides high performance and high reliability
  - **Block interleaved parity** (**RAID 4, 5, 6**) uses much less redundancy
- RAID within a storage array can still fail if the array fails, so automatic **replication** of the data between arrays is common
- Frequently, a small number of **hot-spare** disks are left unallocated, automatically replacing a failed disk and having data rebuilt onto them

RAID Levels

(a) RAID 0: non-redundant striping.

(b) RAID 1: mirrored disks.

(c) RAID 4: block-interleaved parity.

(d) RAID 5: block-interleaved distributed parity.

(e) RAID 6: P + Q redundancy.

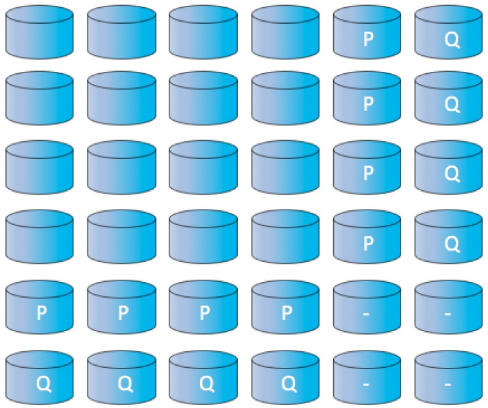

(f) Multidimensional RAID 6.

RAID (0 + 1) and (1 + 0)

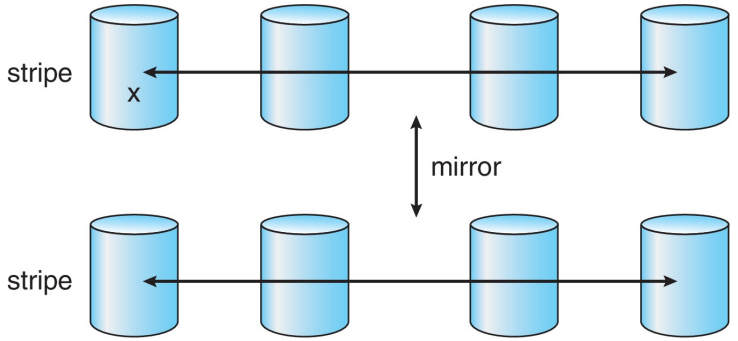

a) RAID 0 + 1 with a single disk failure.

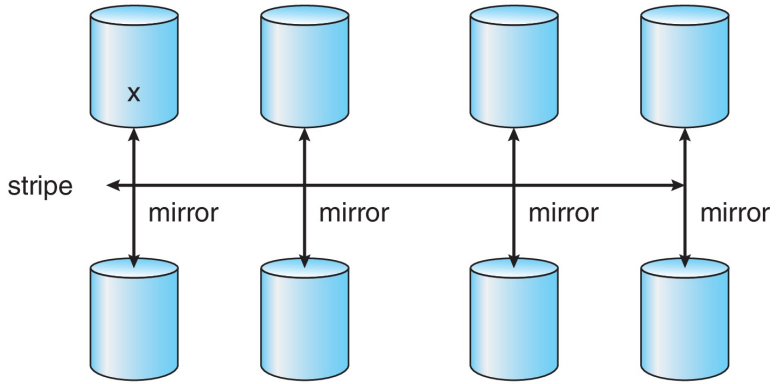

b) RAID 1 + 0 with a single disk failure.

Other Features

- Regardless of where RAID implemented, other useful features can be added
- **Snapshot** is a view of file system before a set of changes take place (i.e. at a point in time)
  - More in Ch 12
- Replication is automatic duplication of writes between separate sites
  - For redundancy and disaster recovery
  - Can be synchronous or asynchronous
- Hot spare disk is unused, automatically used by RAID production if a disk fails to replace the failed disk and rebuild the RAID set if possible
  - Decreases mean time to repair

I/O Hardware

- Incredible variety of I/O devices
  - Storage
  - Transmission
  - Human-interface
- Common concepts – signals from I/O devices interface with computer
  - **Port** – connection point for device
  - **Bus** - **daisy chain** or shared direct access
    - **PCI** bus common in PCs and servers, PCI Express (**PCIe**)
    - **expansion bus** connects relatively slow devices
    - **Serial-attached SCSI** (**SAS**) common disk interface

I/O Hardware (Cont.)

- **Controller** (**host adapter**) – electronics that operate port, bus, device
  - Sometimes integrated
  - Sometimes separate circuit board (host adapter)
  - Contains processor, microcode, private memory, bus controller, etc.
    - Some talk to per-device controller with bus controller, microcode, memory, etc.

A Typical PC Bus Structure

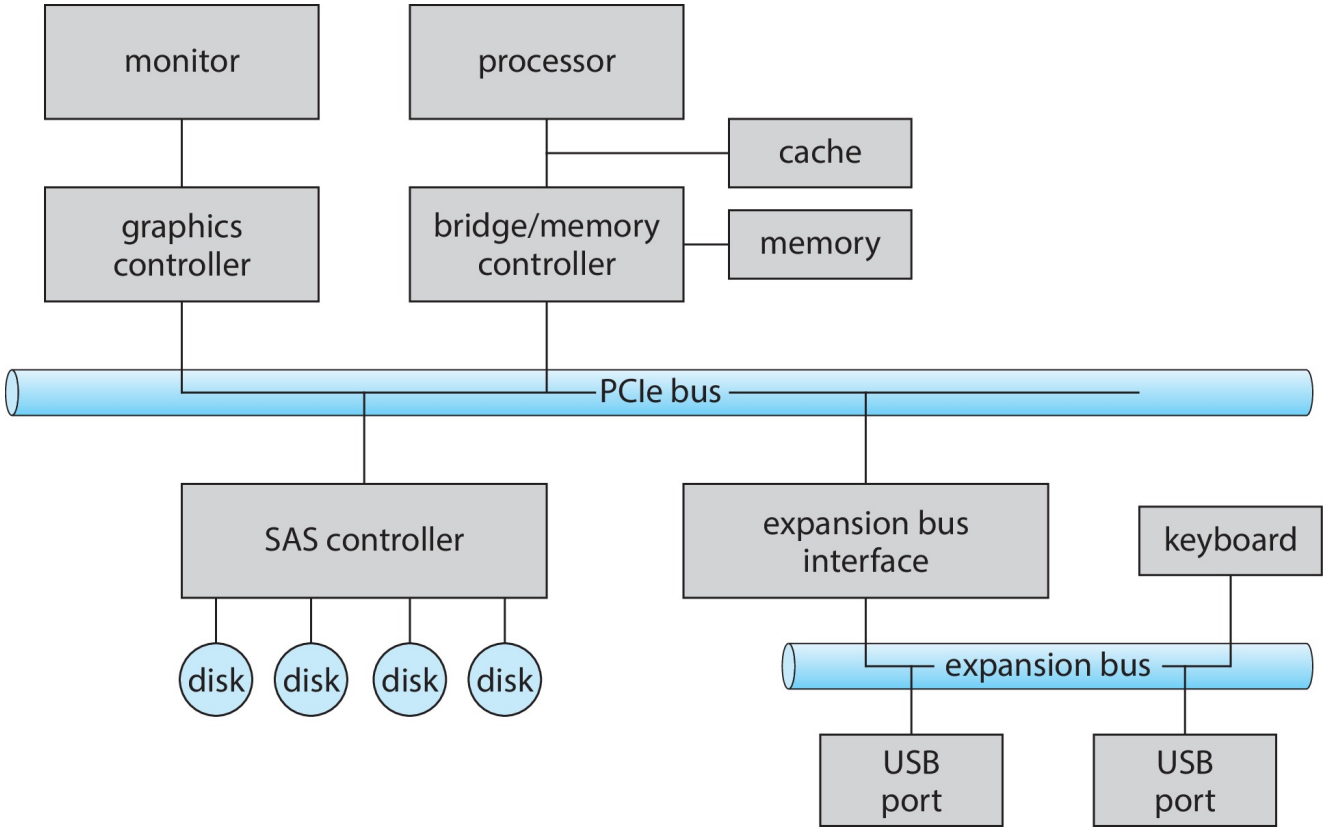

I/O Hardware (Cont.)

- **Fibre channel** (**FC**) is complex controller, usually separate circuit board (**host-bus adapter**, **HBA**) plugging into bus
- I/O instructions control devices
- Devices usually have registers where device driver places commands, addresses, and data to write, or read data from registers after command execution
  - Data-in register, data-out register, status register, control register
  - Typically 1-4 bytes, or FIFO buffer

I/O Hardware (Cont.)

- Devices have addresses, used by
  - Direct I/O instructions
  - **Memory-mapped I/O**
    - Device data and command registers mapped to processor address space
    - Especially for large address spaces (graphics)

Device I/O Port Locations on PCs (partial)

I/O address range (hexadecimal)	device
000–00F	DMA controller
020–021	interrupt controller
040–043	timer
200–20F	game controller
2F8–2FF	serial port (secondary)
320–32F	hard-disk controller
378–37F	parallel port
3D0–3DF	graphics controller
3F0–3F7	diskette-drive controller
3F8–3FF	serial port (primary)

Polling

- For each byte of I/O
  1. Read busy bit from status register until 0
  2. Host sets read or write bit and if write copies data into data-out register
  3. Host sets command-ready bit
  4. Controller sets busy bit, executes transfer
  5. Controller clears busy bit, error bit, command-ready bit when transfer done
- Step 1 is **busy-wait** cycle to wait for I/O from device
  - Reasonable if device is fast
  - But inefficient if device slow
  - CPU switches to other tasks?
    - But if miss a cycle data overwritten / lost

Interrupts

- Polling can happen in 3 instruction cycles
  - Read status, logical-and to extract status bit, branch if not zero
  - How to be more efficient if non-zero infrequently?
- CPU **Interrupt-request line** triggered by I/O device
  - Checked by processor after each instruction
- **Interrupt handler** receives interrupts
  - **Maskable** to ignore or delay some interrupts
- **Interrupt vector** to dispatch interrupt to correct handler
  - Context switch at start and end
  - Based on priority
  - Some **nonmaskable**
  - Interrupt chaining if more than one device at same interrupt number

Direct Memory Access

- Used to avoid **programmed I/O** (one byte at a time) for large data movement
- Requires **DMA** controller
- Bypasses CPU to transfer data directly between I/O device and memory
- OS writes DMA command block into memory
  - Source and destination addresses
  - Read or write mode
  - Count of bytes
  - Writes location of command block to DMA controller
  - Bus mastering of DMA controller – grabs bus from CPU
    - **Cycle stealing** from CPU but still much more efficient
  - When done, interrupts to signal completion
- Version that is aware of virtual addresses can be even more efficient - **DVMA**

Six Step Process to Perform DMA Transfer

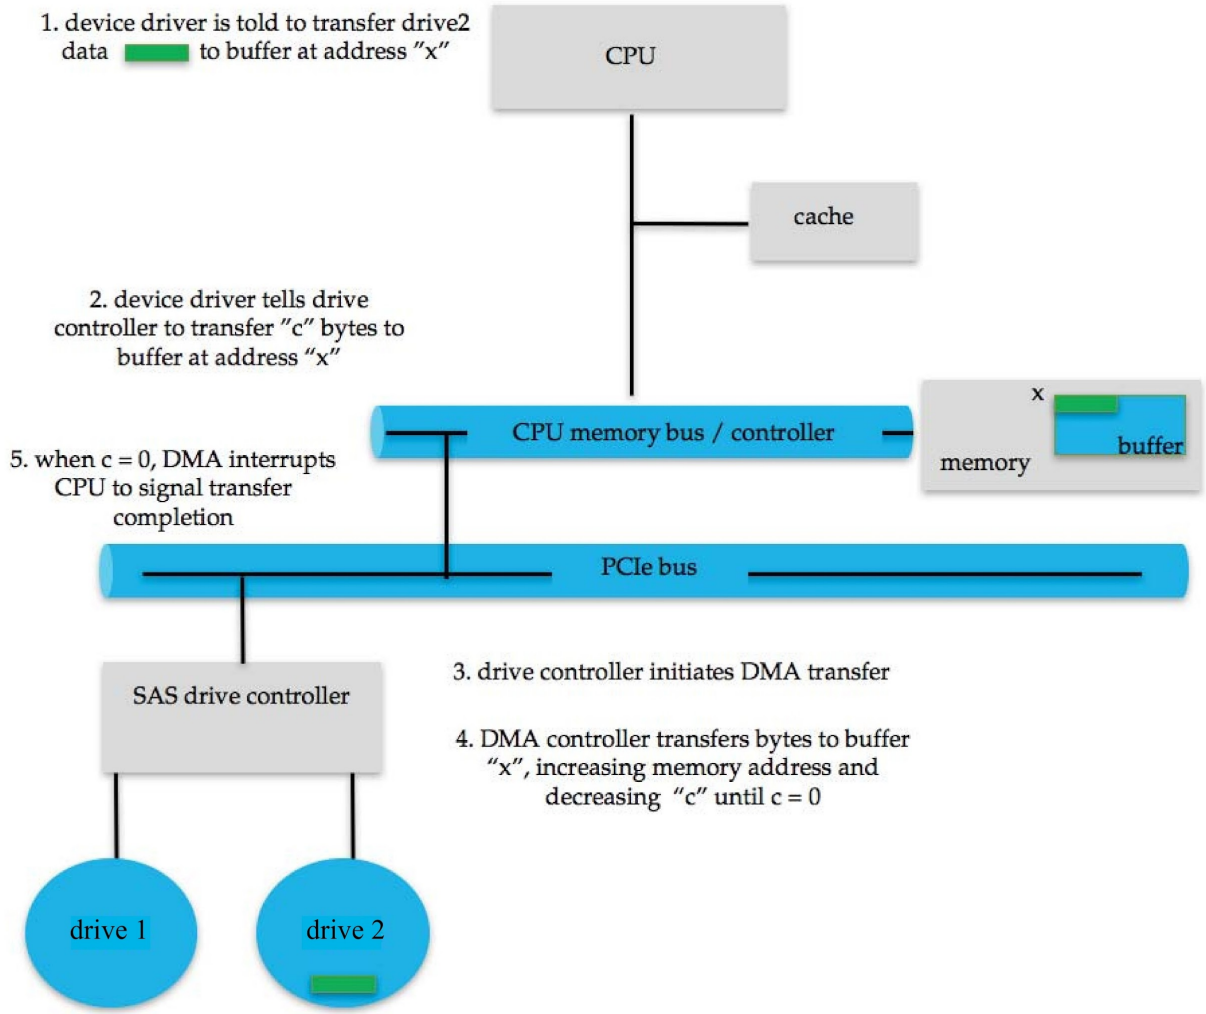

Application I/O Interface

- I/O system calls encapsulate device behaviors in generic classes
- Device-driver layer hides differences among I/O controllers from kernel
- New devices talking already-implemented protocols need no extra work
- Each OS has its own I/O subsystem structures and device driver frameworks
- Devices vary in many dimensions
  - **Character-stream** or **block**
  - **Sequential** or **random-access**
  - **Synchronous** or **asynchronous** (or both)
  - **Sharable** or **dedicated**
  - **Speed of operation**
  - **read-write**, **read only**, or **write only**

Characteristics of I/O Devices (Cont.)

- Subtleties of devices handled by device drivers
- Broadly I/O devices can be grouped by the OS into
  - Block I/O
  - Character I/O (Stream)
  - Memory-mapped file access
  - Network sockets
- For direct manipulation of I/O device specific characteristics, usually an escape / back door
  - Unix **`ioctl()`** call to send arbitrary bits to a device control register and data to device data register
- UNIX and Linux use tuple of "major" and "minor" device numbers to identify type and instance of devices (here major 8

```
brw-rw---- 1 root disk 8, 0 Mar 16 09:18 /dev/sda
brw-rw---- 1 root disk 8, 1 Mar 16 09:18 /dev/sda1
brw-rw---- 1 root disk 8, 2 Mar 16 09:18 /dev/sda2
brw-rw---- 1 root disk 8, 3 Mar 16 09:18 /dev/sda3
```

Block and Character Devices

- Block devices include disk drives
  - Commands include read, write, seek
  - **Raw I/O**, **direct I/O**, or file-system access
  - Memory-mapped file access possible
    - File mapped to virtual memory and clusters brought via demand paging
  - DMA
- Character devices include keyboards, mice, serial ports
  - Commands include **`get(), put()`**
  - Libraries layered on top allow line editing

Network Devices

- Varying enough from block and character to have own interface
- Linux, Unix, Windows and many others include **socket** interface
  - Separates network protocol from network operation
  - Includes `select()` functionality
- Approaches vary widely (pipes, FIFOs, streams, queues, mailboxes)

Clocks and Timers

- Provide current time, elapsed time, timer
- Normal resolution about 1/60 second
- Some systems provide higher-resolution timers
- **Programmable interval timer** used for timings, periodic interrupts
- `ioctl()` (on UNIX) covers odd aspects of I/O such as clocks and timers

Nonblocking and Asynchronous I/O

- **Blocking** - process suspended until I/O completed
  - Easy to use and understand
  - Insufficient for some needs
- **Nonblocking** - I/O call returns as much as available
  - User interface, data copy (buffered I/O)
  - Implemented via multi-threading
  - Returns quickly with count of bytes read or written
  - `select()` to find if data ready then `read()` or `write()` to transfer
- **Asynchronous** - process runs while I/O executes
  - Difficult to use
  - I/O subsystem signals process when I/O completed

Two I/O Methods