
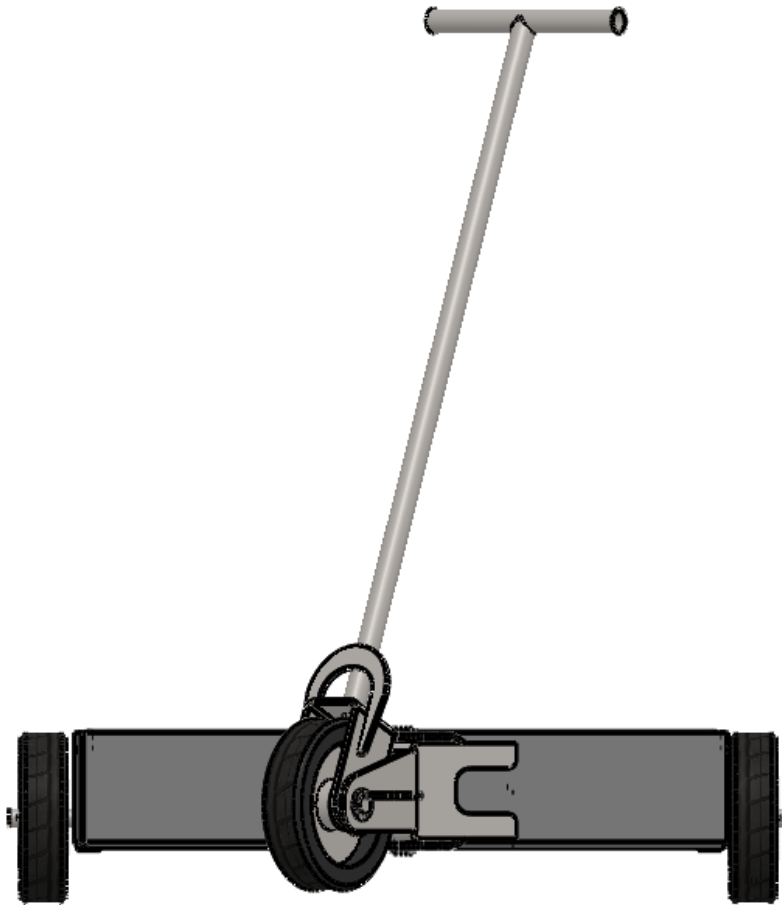
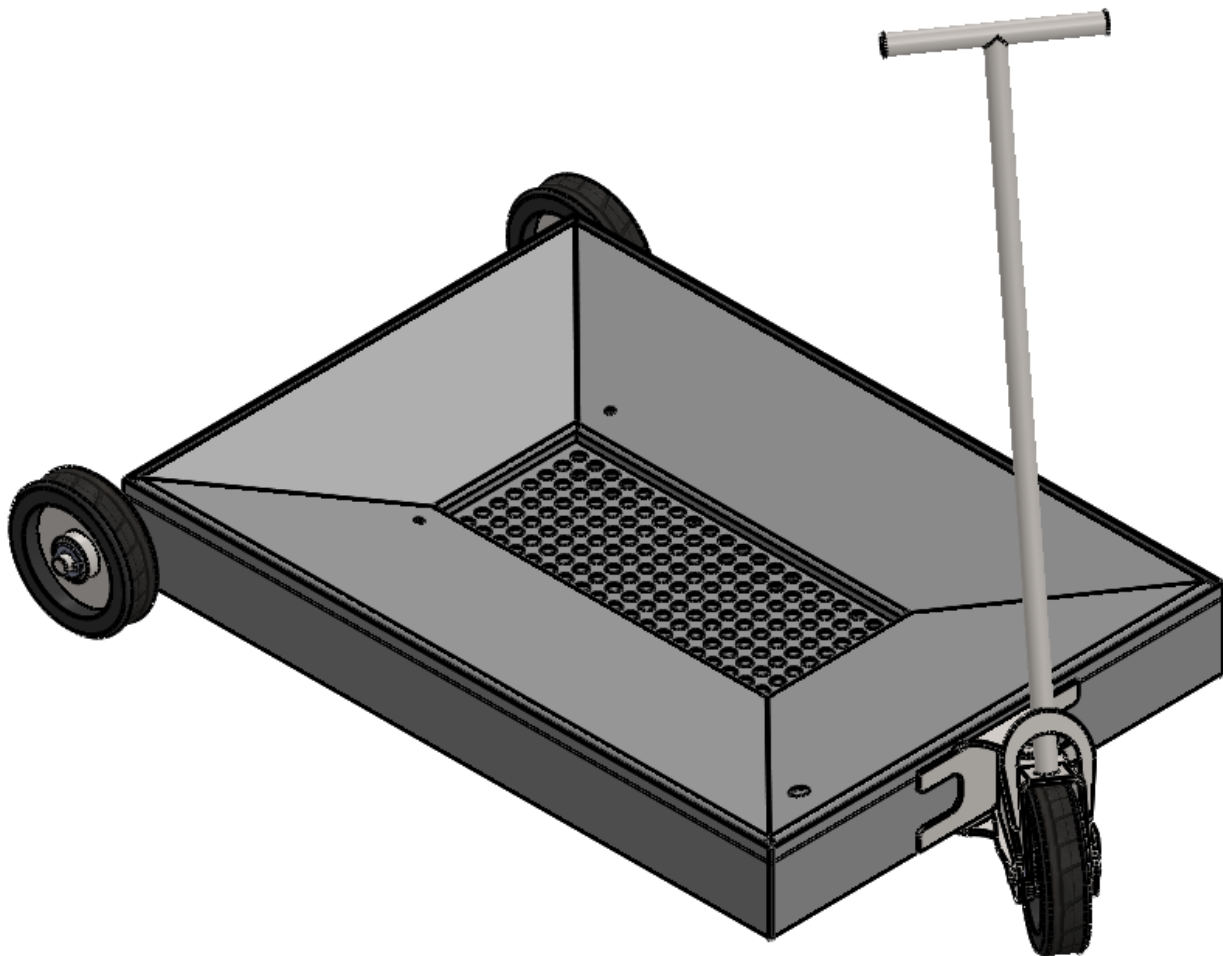
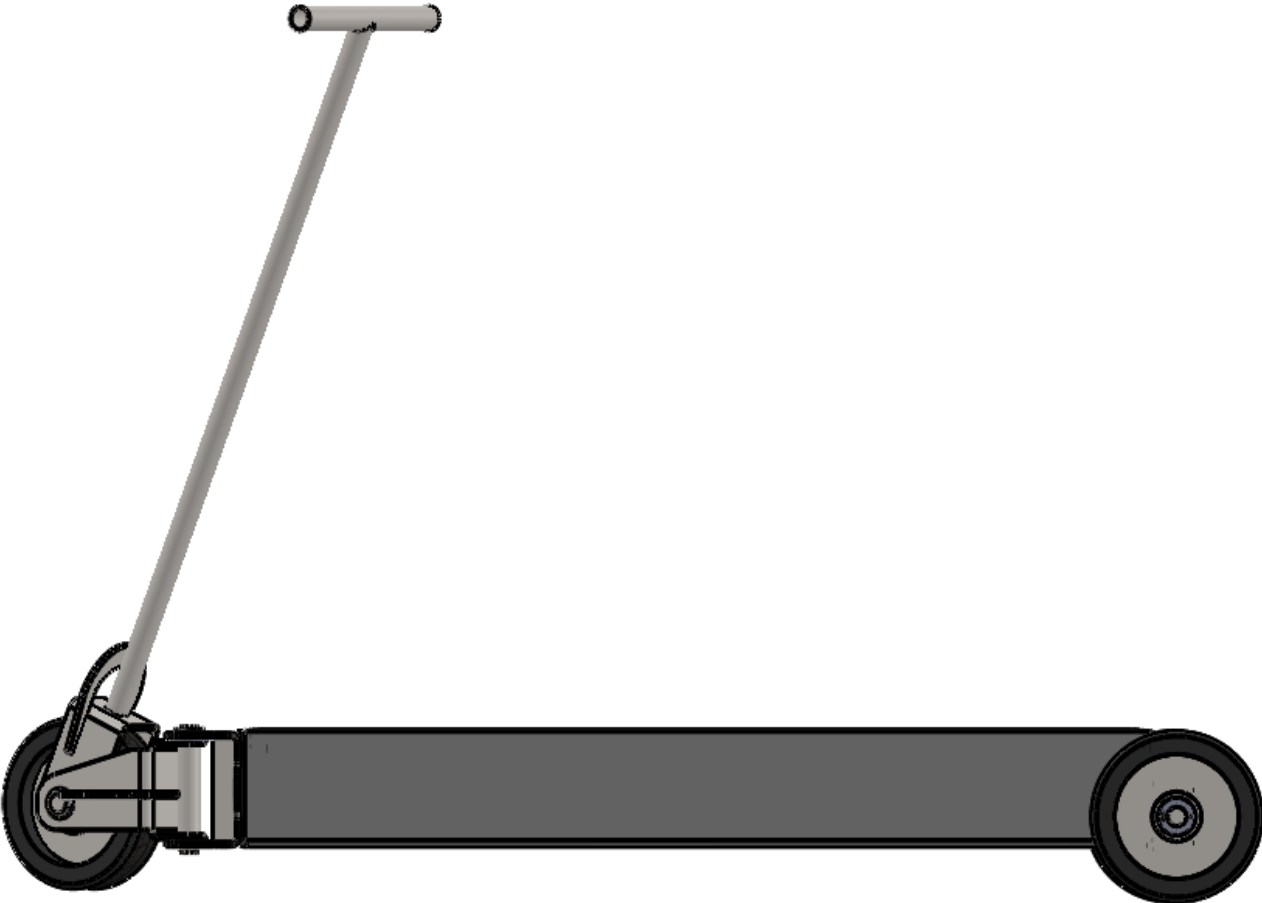


DO NOT SCALE, DO NOT DOUBT, MAKE SURE

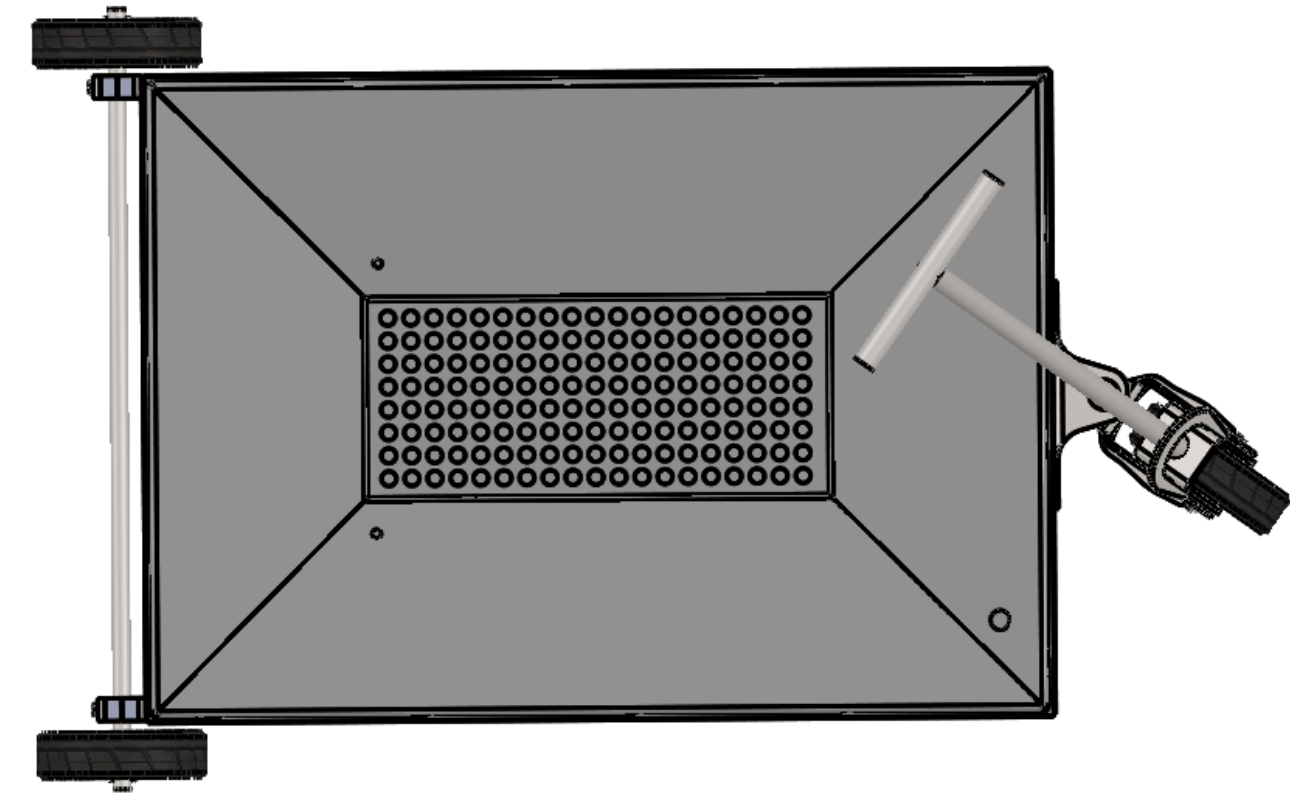

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g



DRG NR:

TITLE:

MATERIAL:

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

Qty:

Scale:

1:10

A3

Sheet:

1 of 1

Date:


2014/07/02

Rev:



COPYRIGHT:  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.

DO NOT SCALE, DO NOT DOUBT, MAKE SURE

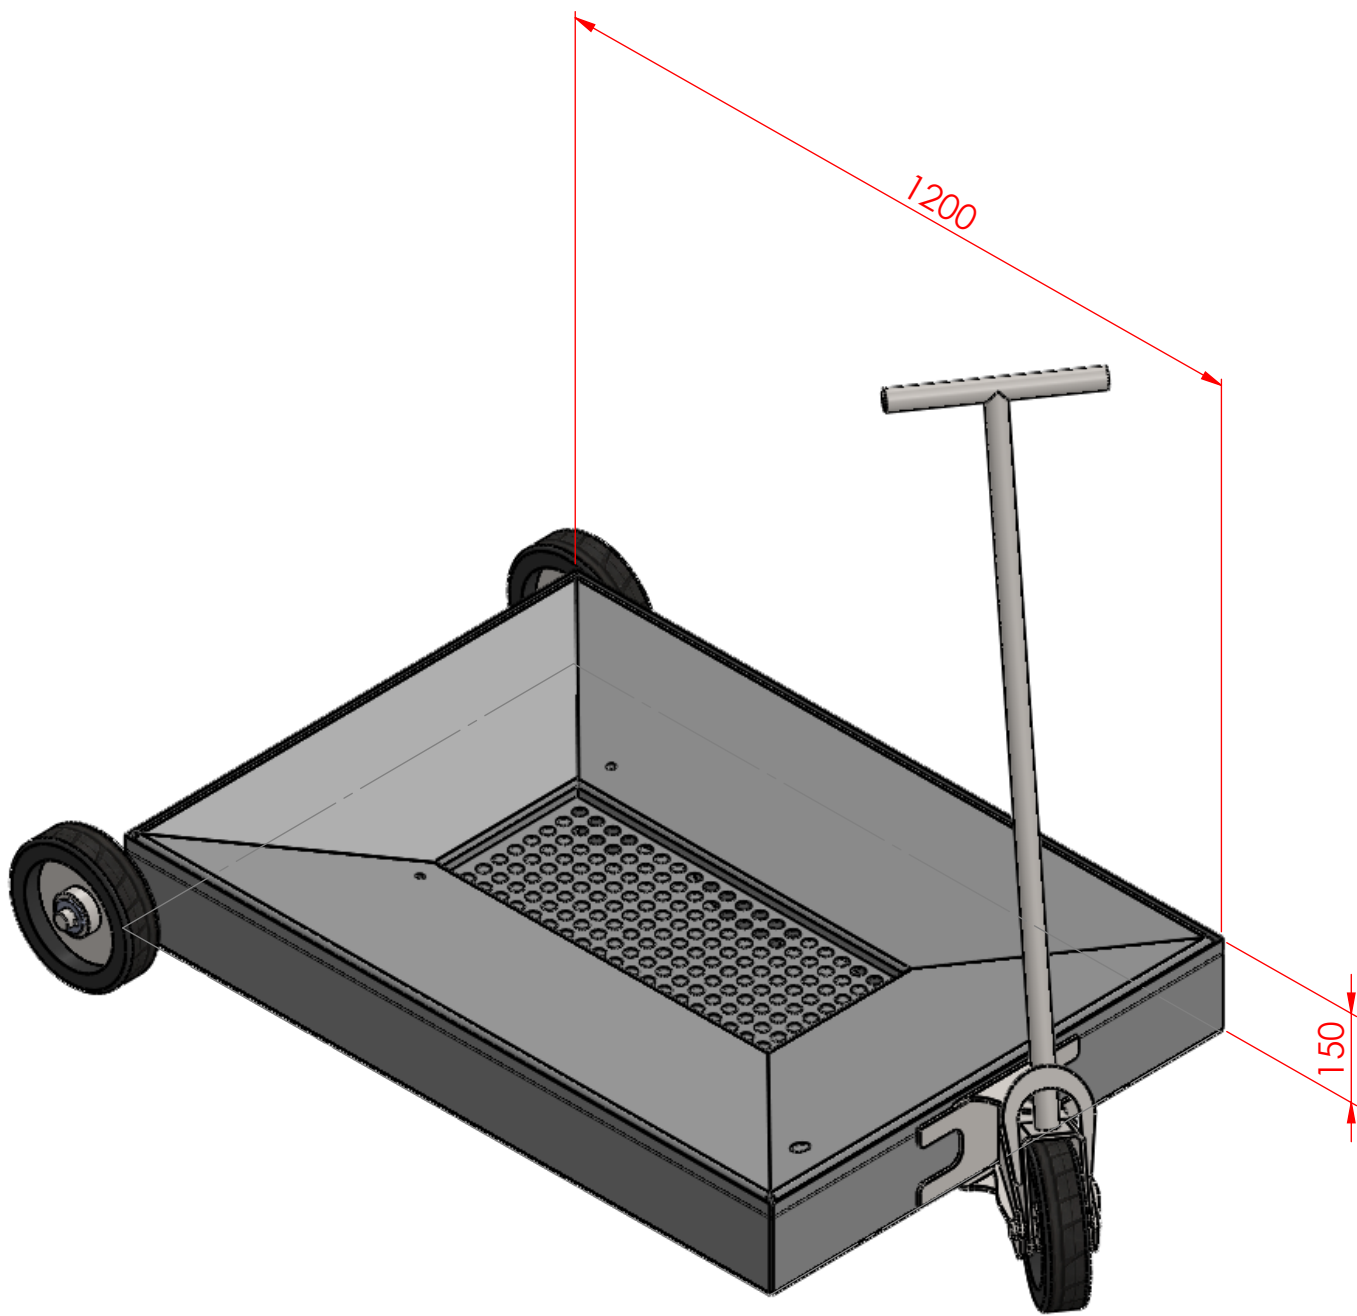

| ITEM NO. | PART NUMBER                                           | Supplier                | QTY. | TOTAL QTY |
|----------|-------------------------------------------------------|-------------------------|------|-----------|
| 1        | 128515 U-Base(IMD-SL2-004-007)                        | STERLING                | 1    | 1         |
| 2        | 128515 U-Top(IMD-SL2-005-003)                         | STERLING                | 1    | 1         |
| 3        | 128515 I-Top(IMD-SL2-006-003)                         | STERLING                | 1    | 1         |
| 4        | 128515 U-Strn(IMD-SL2-010-007)                        | STERLING                | 1    | 1         |
| 5        | 30x5 Flatbar 1200mm                                   | MAC STEEL/NJR/GK        | 2    | 4170mm    |
| 6        | 30x5 Flatbar 790mm                                    |                         | 2    | COUNTED   |
| 7        | 25to165 rim                                           |                         | 3    | N/A       |
| 8        | 200mm Tire200mm Wheel (WSS200B25)                     | SA LADDER               | 3    | 3         |
| 9        | 1030x 25mm Bright Steel Shaft                         | MAC STEEL               | 1    | 1350mm    |
| 10       | 25MM OD HEAVY DUTY ALUMINUM WELD ON CLAMP             | GENFLEX/BHF/BMG         | 2    | 2         |
| 11       | User Library-Pipe Clamp 0750_Pipe Clamp 0750 Plastic  |                         | 2    | N/A       |
| 12       | 3mm x 40mm Split Pin                                  | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 13       | 25x40x4mm Nylon Washer                                | BOLT&NUT/BMG/BOLT & ENG | 6    | 6         |
| 14       | 25x40x4mm Steel Washer                                | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 15       | 128515 Cstr-Ylk(IMD-SL2-007-012)                      | STERLING                | 1    | 1         |
| 16       | 128515 Cstr-Hndl(IMD-SL2-009-001) 31.8X2mm Round Tube | MAC STEEL/NJR/GK        | 1    | 1420mm    |
| 17       | 128515 Cstr-Ylk-Gst(IMD-SL2-007-008)                  | GK                      | 1    | 1         |
| 18       | 128515 Cstr-Wld(IMD-SL2-007-010)                      | STERLING                | 1    | 1         |
| 19       | 30x5 Flatbar 138mm                                    |                         | 1    | COUNTED   |
| 20       | 128515 Cstr-Sprt(IMD-SL2-008-001)                     |                         | 1    | COUNTED   |
| 21       | 128515 Cstr-Lnk(IMD-SL2-007-011)                      | STERLING                | 1    | 1         |
| 22       | 128515 Cstr-Lnk-Gst(IMD-SL2-007-007)                  | GK                      | 1    | 1         |
| 23       | 108 x 25mm Bright Steel Shaft                         |                         | 1    | COUNTED   |
| 24       | 166 x 25mm Bright Steel Shaft                         |                         | 1    | COUNTED   |

GENERAL TOL EXCEPT OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g



DRG NR:  
1200 X 850 X 150 OIL DRIP TROLLEY V0.1

TITLE:  
1200 X 850 X 150 OIL DRIP TROLLEY V0.1

Material:  
POWDERCOATED MS

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

Qty:  
1

Scale:  
1:10

A3

Sheet:  
1 of 1


Date:  
2014/08/11

Rev:  
1



COPYRIGHT:  
This drawing is the property of IFS and may not be copied or carried over in full or any part thereof to a third party without written permission of IFS.

DO NOT SCALE, DO NOT DOUBT, MAKE SURE

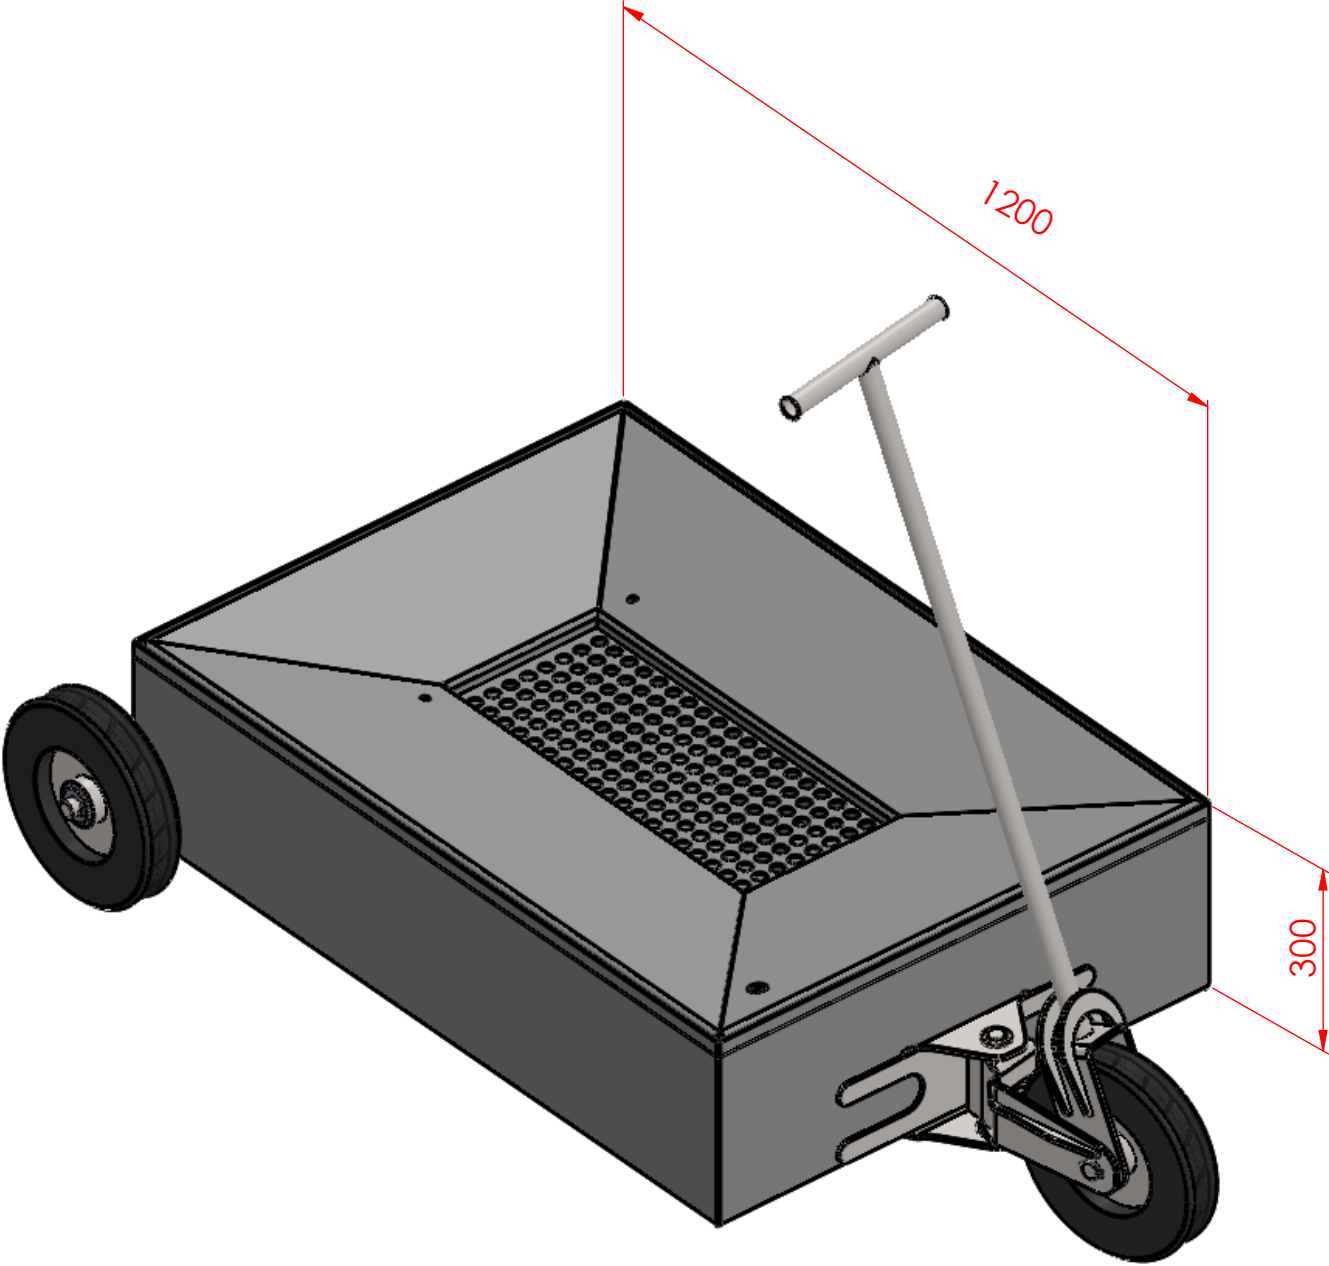

| ITEM NO. | PART NUMBER                                              | Supplier                | QTY. | TOTAL QTY |
|----------|----------------------------------------------------------|-------------------------|------|-----------|
| 1        | 12853 U-Base(IMD-SL2-004-008)                            | STERLING                | 1    | 1         |
| 2        | 128515 U-Top(IMD-SL2-005-003)                            | STERLING                | 1    | 1         |
| 3        | 128515 I-Top(IMD-SL2-006-003)                            | STERLING                | 1    | 1         |
| 4        | 12853 U-Strn(IMD-SL2-010-002)                            | GK                      | 1    | 1         |
| 5        | 30x5 Flatbar 1200mm                                      | MAC STEEL/NJR/GK        | 2    | 4170mm    |
| 6        | 30x5 Flatbar 790mm                                       |                         | 2    | COUNTED   |
| 7        | 25to165 rim                                              |                         | 3    | N/A       |
| 8        | 300mm Wheel (WSS 300 B25)                                | SA LADDER               | 3    | 3         |
| 9        | 1030x 25mm Bright Steel Shaft                            | MAC STEEL               | 1    | 1350mm    |
| 10       | 25MM OD HEAVY DUTY ALUMINUM WELD ON CLAMP                | GENFLEX/BHF/BMG         | 2    | 2         |
| 11       | User Library-Pipe Clamp 0750_Pipe Clamp 0750 Plastic     |                         | 2    | N/A       |
| 12       | 116 Cstr-Wld(IMD-SL2-007-004)                            | STERLING                | 1    | 1         |
| 13       | 30x5 Flatbar 138mm                                       |                         | 1    | COUNTED   |
| 14       | 108 x 25mm Bright Steel Shaft                            |                         | 1    | COUNTED   |
| 15       | 166 x 25mm Bright Steel Shaft                            |                         | 1    | COUNTED   |
| 16       | 116 Cstr-Lnk(IMD-SL2-007-005)                            | STERLING                | 1    | 1         |
| 17       | 128515 Cstr-Sprt(IMD-SL2-008-001)                        | MAC STEEL/NJR/GK        | 1    | 1420mm    |
| 18       | 116 Cstr-Mnt-Gst(IMD-SL2-007-009)                        | GK                      | 1    | 1         |
| 19       | 116 Cstr-Ylk(IMD-SL2-007-006)                            | STERLING                | 1    | 1         |
| 20       | 128515 Cstr-Hndl(IMD-SL2-009-001)<br>31.8X2mm Round Tube |                         | 1    | COUNTED   |
| 21       | 128515 Cstr-Ylk-Gst(IMD-SL2-007-008)                     | GK                      | 2    | 2         |
| 22       | 3mm x 40mm Split Pin                                     | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 23       | 25x40x4mm Nylon Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 6    | 6         |
| 24       | 25x40x4mm Steel Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |

GENERAL TOL EXCEPT OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g

DRG NR:  
1200 X 850 X 300 OIL DRIP TROLLEY V0.1

TITLE:  
1200 X 850 X 300 OIL DRIP TROLLEY V0.1

Material:  
POWDERCOATED MS

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

FUEL & LUBE HANDLING

Qty:  
1

Scale:  
1:10

A3

Sheet:  
1 of 1


Date:  
2014/08/11

Rev:  
1

COPYRIGHT:  
This drawing is the property of IFS and may not be copied or carried over in full or any part thereof to a third party without written permission of IFS.



DO NOT SCALE, DO NOT DOUBT, MAKE SURE

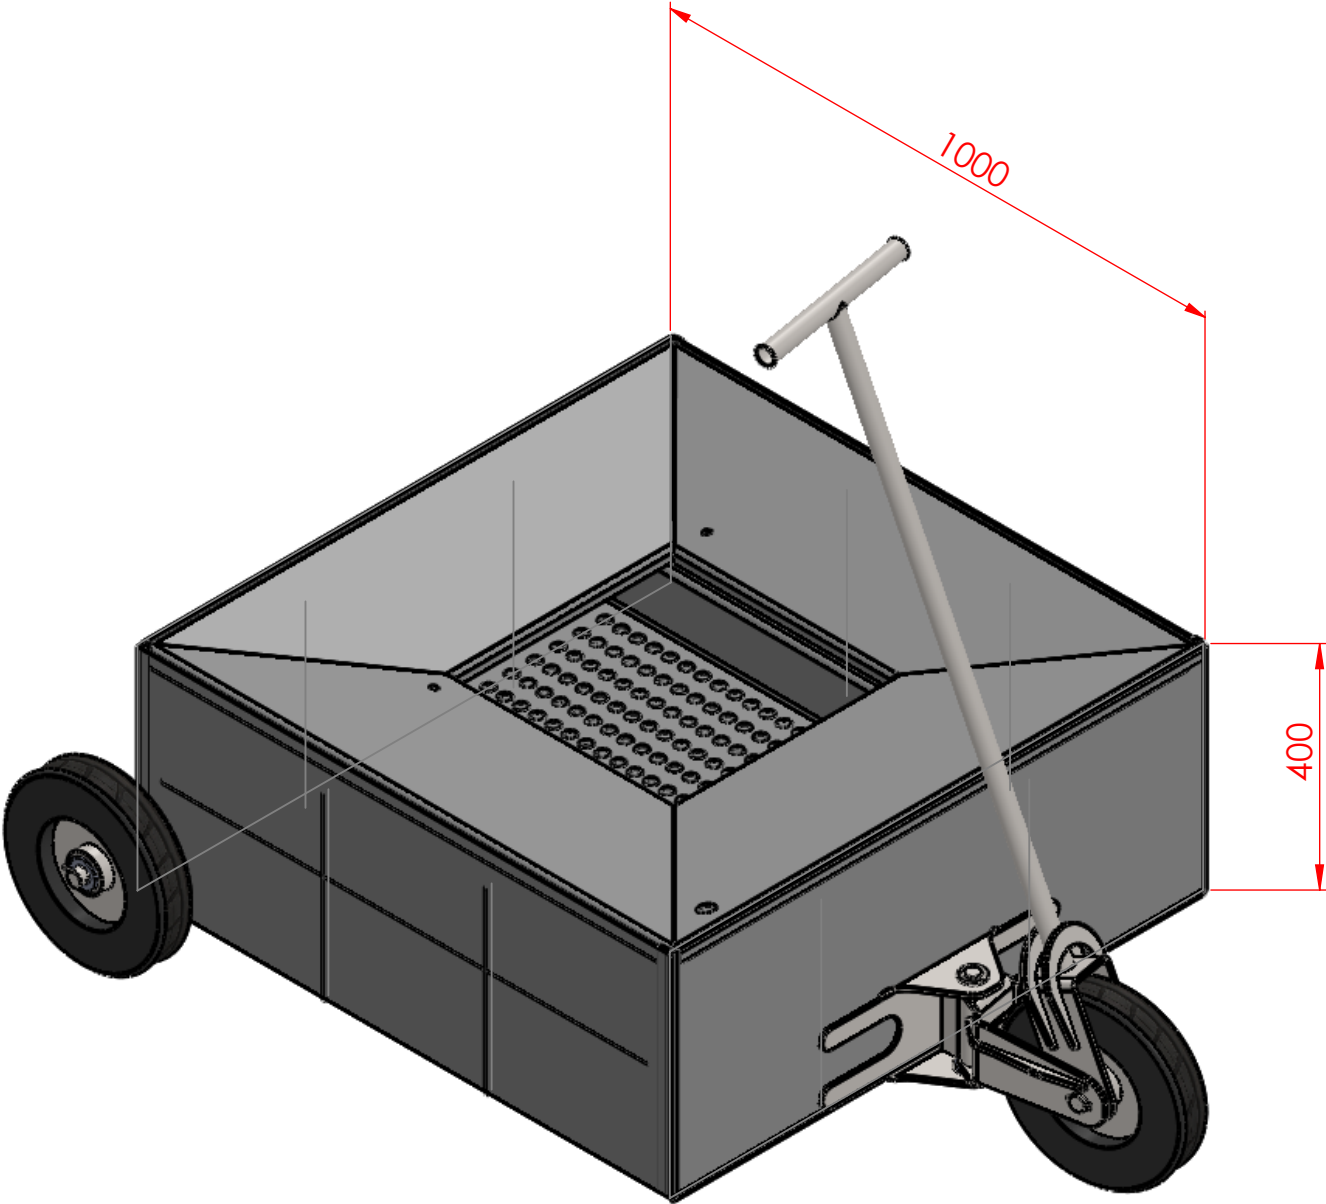

| ITEM NO. | PART NUMBER                                              | Supplier                | QTY. | TOTAL QTY |
|----------|----------------------------------------------------------|-------------------------|------|-----------|
| 1        | 114 U-Base(IMD-SL2-004-005)                              | STERLING                | 1    | 1         |
| 2        | 116 U-Top(IMD-SL2-005-002)                               | STERLING                | 1    | 1         |
| 3        | 116 I-Top(IMD-SL2-006-002)                               | STERLING                | 1    | 1         |
| 4        | 114 U-Strn-A(IMD-SL2-010-005)                            | GK                      | 1    | 1         |
| 5        | 30x5 Flatbar 940mm                                       | MAC STEEL/NJR/GK        | 2    | 8620mm    |
| 6        | 30x5 Flatbar 1000mm                                      |                         | 2    | COUNTED   |
| 7        | 114 U-Strn-B(IMD-SL2-010-006)                            | GK                      | 1    | 1         |
| 8        | 114 U-Base Sd(IMD-SL2-004-006)                           | STERLING                | 2    | 2         |
| 9        | 30x5 Flatbar 344mm                                       |                         | 8    | COUNTED   |
| 10       | 30x5 Flatbar 300mm                                       |                         | 6    | COUNTED   |
| 11       | 25to165 rim                                              |                         | 3    | N/A       |
| 12       | User Library-Pipe Clamp<br>0750_Pipe Clamp 0750 Plastic  |                         | 2    | N/A       |
| 13       | 116 Cstr-Wld(IMD-SL2-007-004)                            | STERLING                | 1    | 1         |
| 14       | 30x5 Flatbar 138mm                                       |                         | 1    | COUNTED   |
| 15       | 116 Cstr-Lnk(IMD-SL2-007-005)                            | STERLING                | 1    | 1         |
| 16       | 128515 Cstr-Sprt(IMD-SL2-008-001)<br>31.8X2mm Round Tube | MAC STEEL/NJR/GK        | 1    | 1420mm    |
| 17       | 116 Cstr-Mnt-Gst(IMD-SL2-007-009)                        | GK                      | 1    | 1         |
| 18       | 116 Cstr-Ylk(IMD-SL2-007-006)                            | STERLING                | 1    | 1         |
| 19       | 128515 Cstr-Ylk-Gst(IMD-SL2-007-008)                     | GK                      | 2    | 2         |
| 20       | 25MM OD HEAVY DUTY<br>ALUMINUM WELD ON<br>CLAMP          | GENFLEX/BHF/BMG         | 2    | 2         |
| 21       | 300mm Wheel (WSS 300 B25)                                | SA LADDER               | 3    | 3         |
| 22       | 25x40x4mm Nylon Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 6    | 6         |
| 23       | 108 x 25mm Bright Steel<br>Shaft                         | MAC STEEL/NJR/GK        | 1    | 1500mm    |
| 24       | 3mm x 40mm Split Pin                                     | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 25       | 166 x 25mm Bright Steel<br>Shaft                         |                         | 1    | COUNTED   |
| 26       | 25x40x4mm Steel Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 27       | 128515 Cstr-Hndl(IMD-SL2-009-001)                        |                         | 1    | COUNTED   |
| 28       | 1176x25 Bright Steel Shaft                               |                         | 1    | COUNTED   |

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000± ±2.0  
3000< ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g



DRG NR:

1000 X 1000 X 400 OIL DRIP TROLLEY V0.1

TITLE:

1000 X 1000 X 400 OIL DRIP TROLLEY V0.1

Material:

POWDERCOATED MS

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

Qty:

1

Scale:

1:10

A3

Sheet:

1 of 1

Date:

2014/08/11





Rev:

1

COPYRIGHT:  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.



DO NOT SCALE, DO NOT DOUBT, MAKE SURE

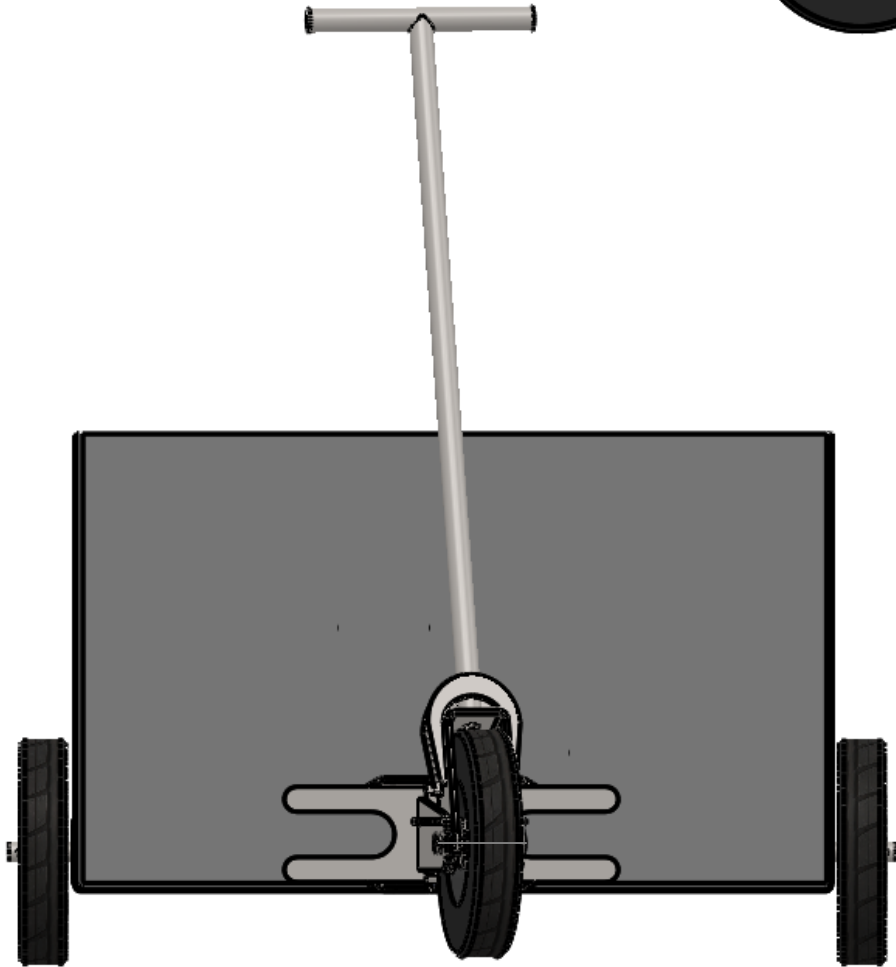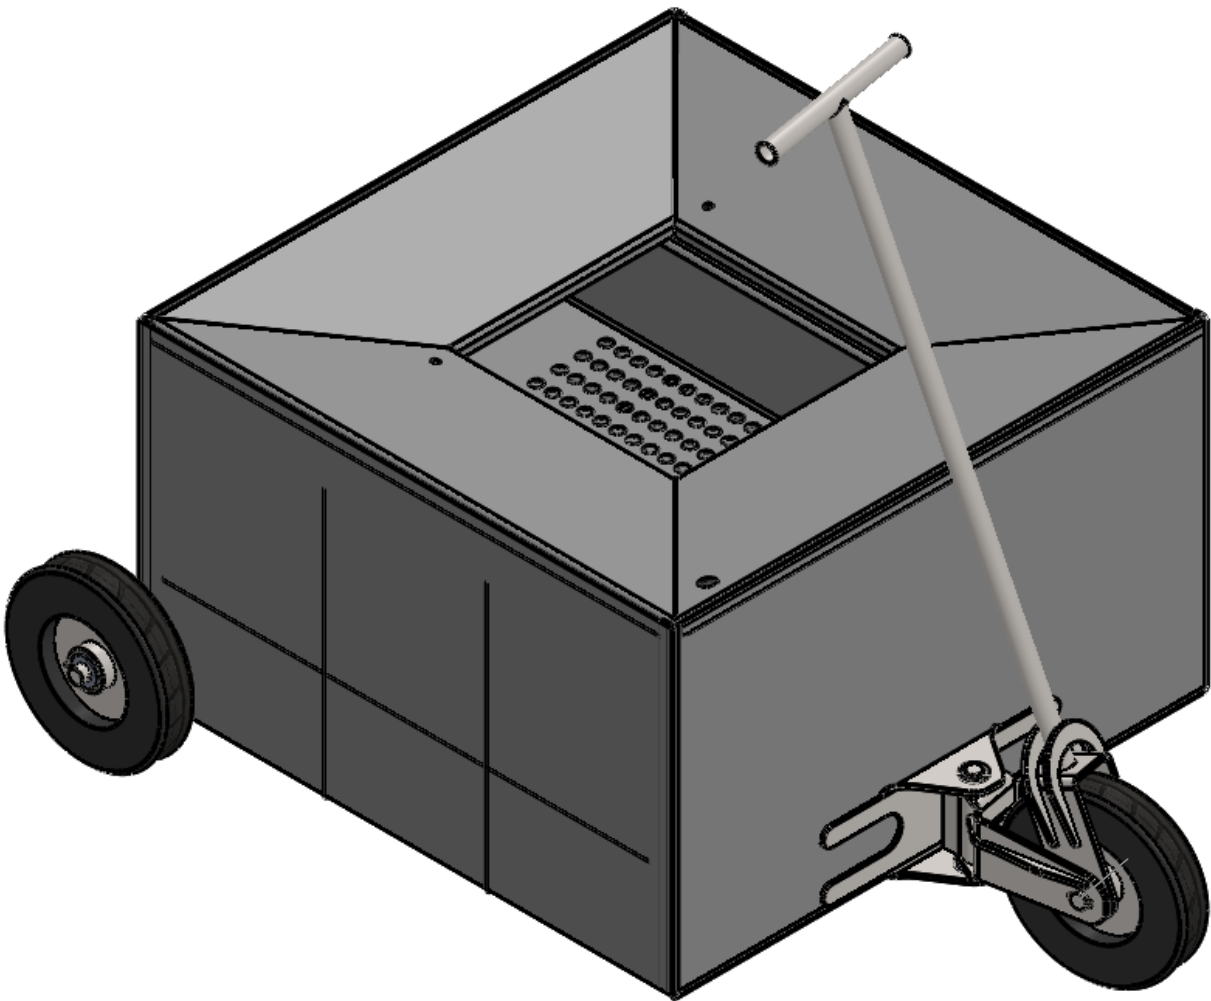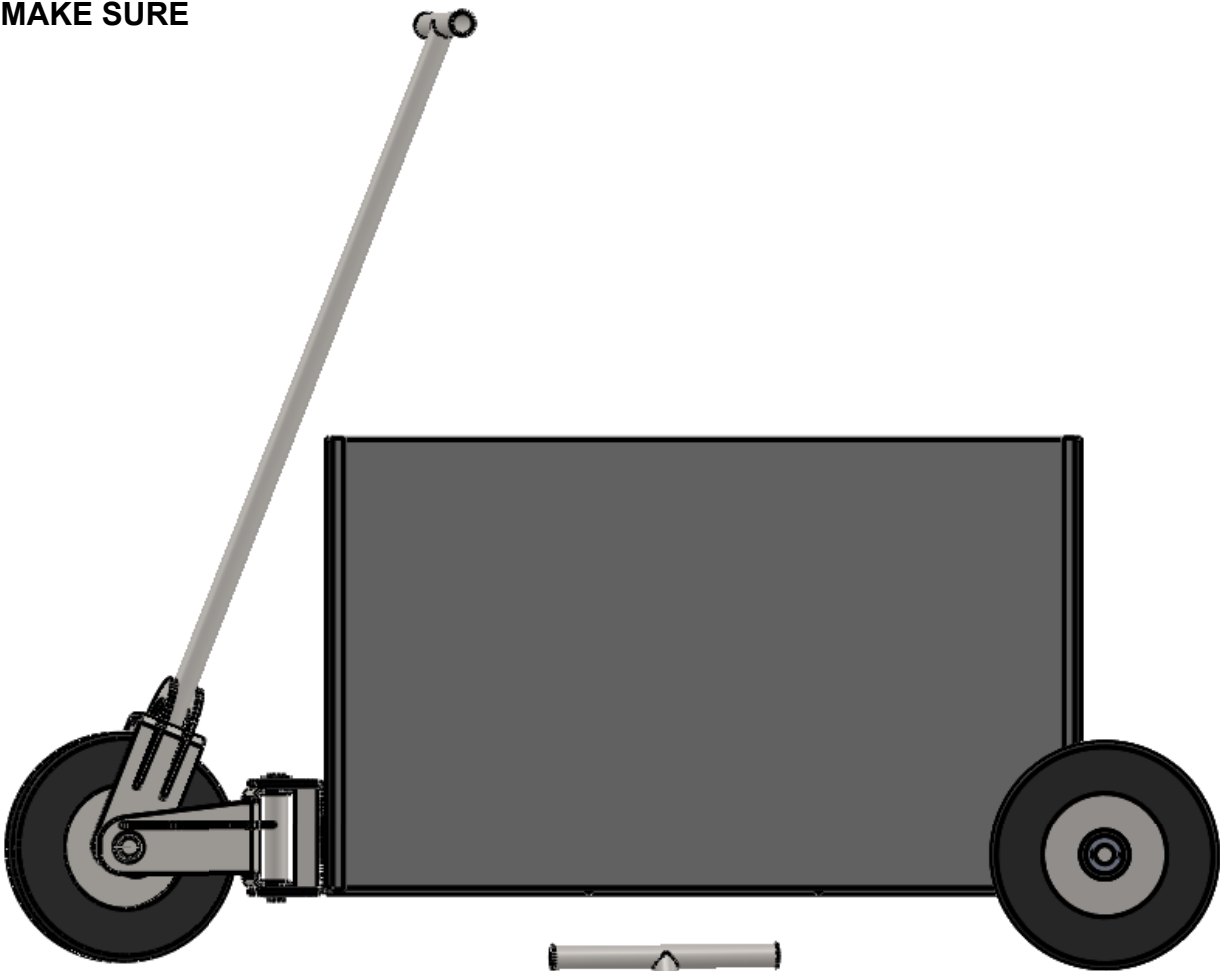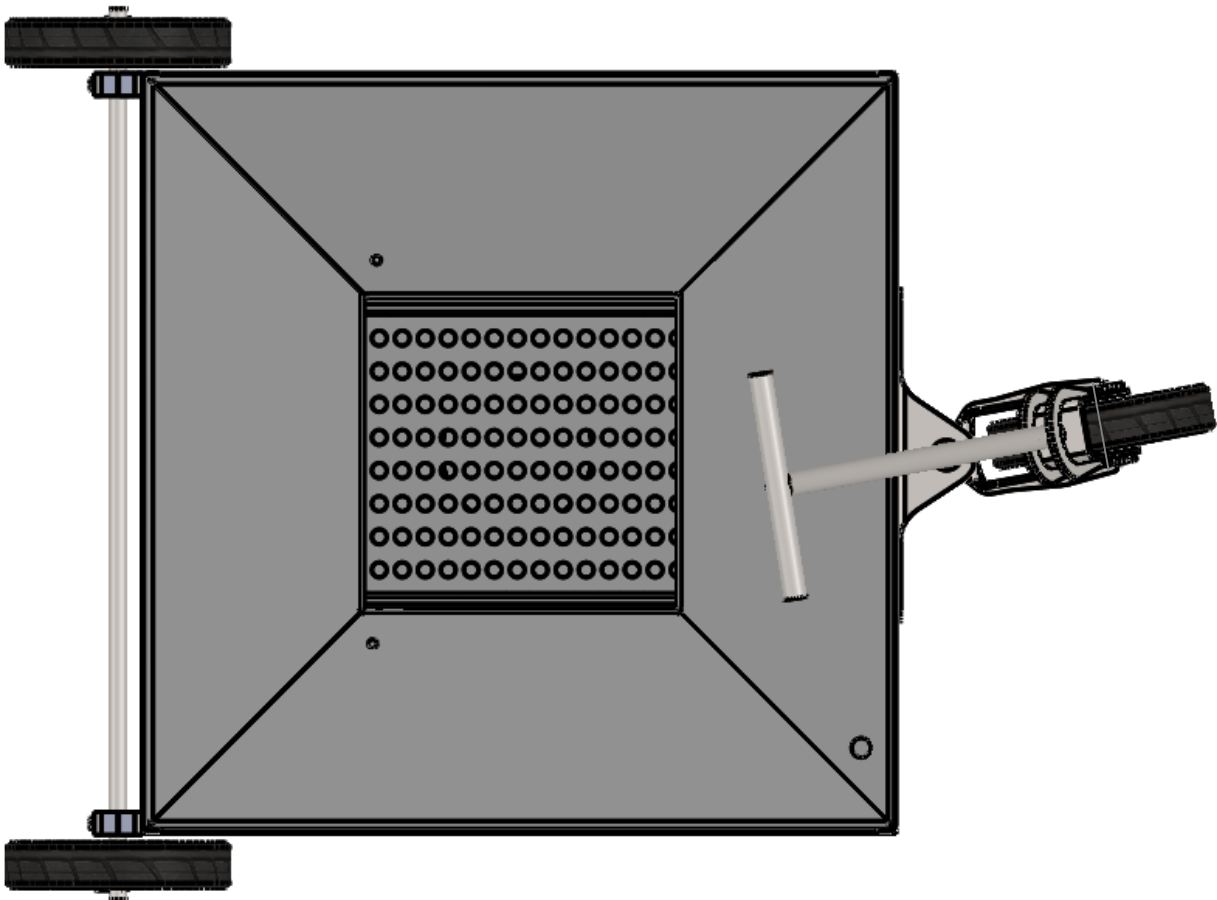

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°  
**UNITS: mm**

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g  
  
DRG NR:


TITLE:  
Material:

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za




|                                                                                                                                                                                  |            |      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------|
| Qty:                                                                                                                                                                             | Scale:     | A3   |
| Sheet:                                                                                                                                                                           | Date:      | Rev: |
| 1 of 1                                                                                                                                                                           | 2014/07/02 |      |
| COPYRIGHT:<br>This drawing is the property of IFS<br>and may not be copied or carried over in<br>full or any part thereof to a third party<br>without written permission of IFS. |            |      |

DO NOT SCALE, DO NOT DOUBT, MAKE SURE

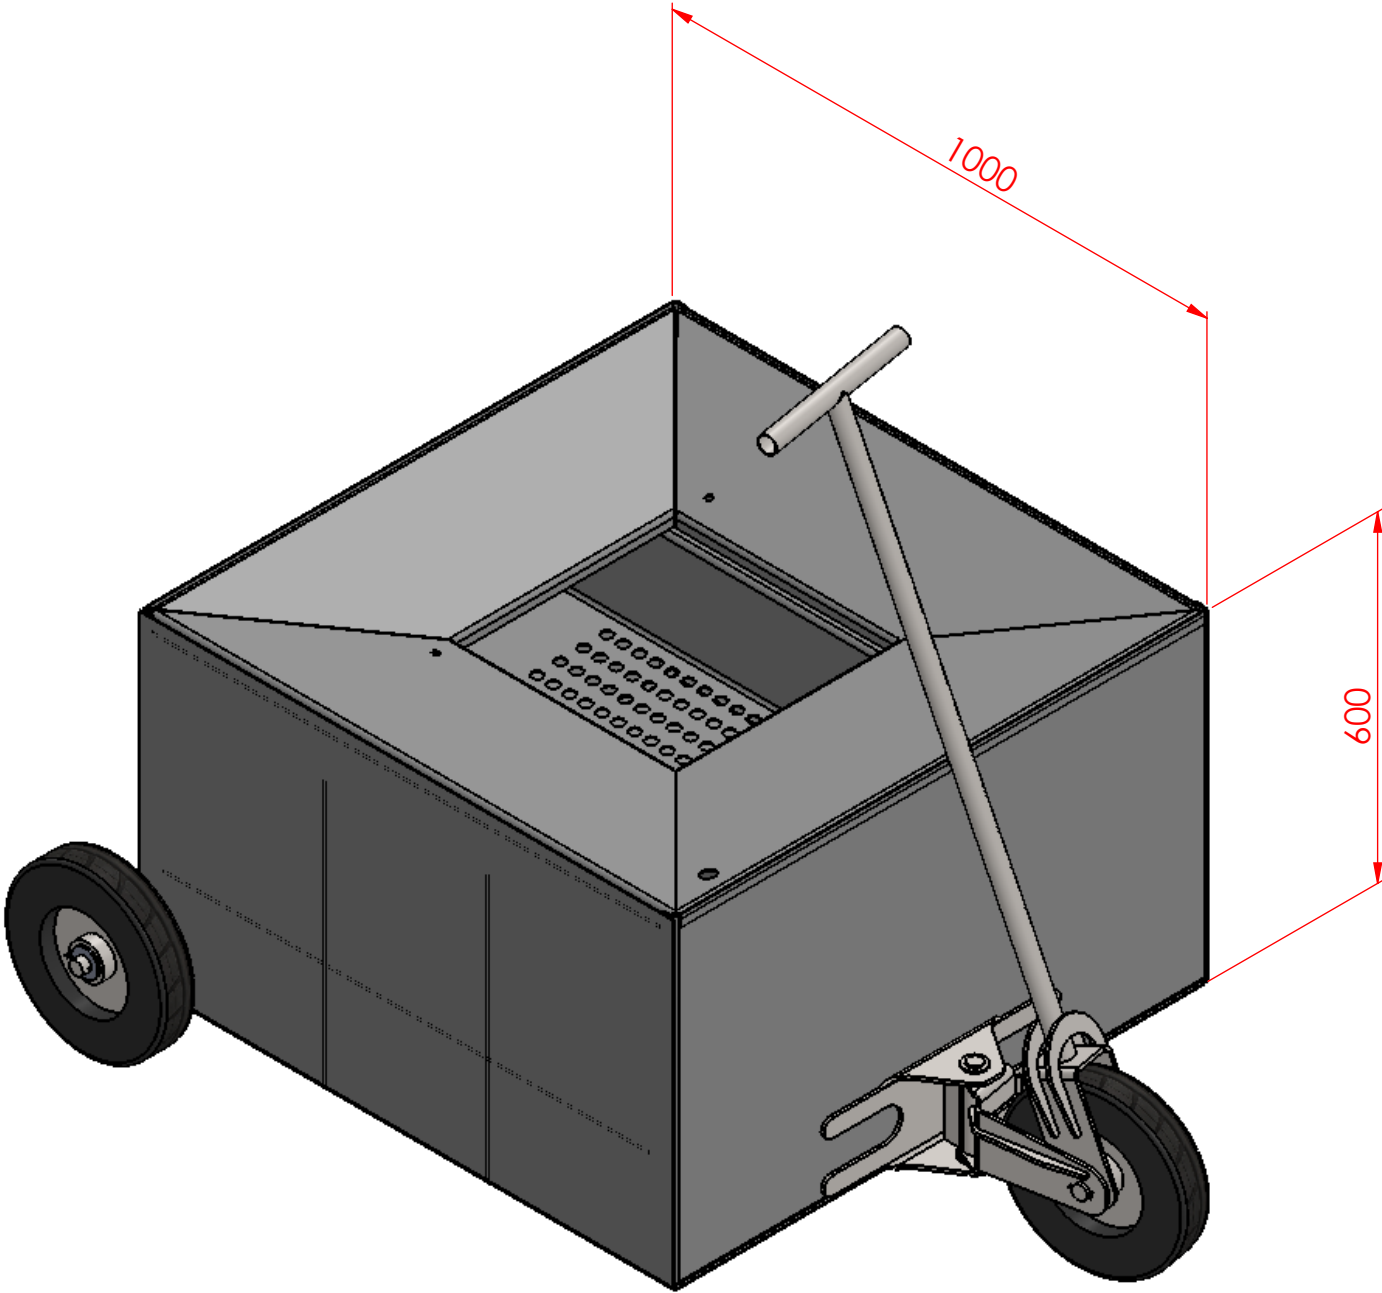


| ITEM NO. | PART NUMBER                                              | Supplier                | QTY. | TOTAL QTY |
|----------|----------------------------------------------------------|-------------------------|------|-----------|
| 1        | 116 U-Base(IMD-SL2-004-003)                              | STERLING                | 1    | 1         |
| 2        | 116 U-Top(IMD-SL2-005-002)                               | STERLING                | 1    | 1         |
| 3        | 116 I-Top(IMD-SL2-006-002)                               | STERLING                | 1    | 1         |
| 4        | 116 U-Strn-A(IMD-SL2-010-003)                            | GK                      | 1    | 1         |
| 5        | 30x5 Flatbar 940mm                                       | MAC STEEL/NJR/GK        | 2    | 9870mm    |
| 6        | 30x5 Flatbar 1000mm                                      |                         | 2    | COUNTED   |
| 7        | 116 U-Strn-B(IMD-SL2-010-004)                            | GK                      | 1    | 1         |
| 8        | 116 U-Base Sd(IMD-SL2-004-004)                           | STERLING                | 2    | 2         |
| 9        | 30x5 Flatbar 500mm                                       |                         | 8    | COUNTED   |
| 10       | 30x5 Flatbar 300mm                                       |                         | 6    | COUNTED   |
| 11       | 25to165 rim                                              |                         | 3    | N/A       |
| 12       | 300mm Wheel (WSS 300 B25)                                | SA LADDER               | 3    | 3         |
| 13       | 1176x25 Bright Steel Shaft                               | MAC STEEL/NJR/GK        | 1    | 1500      |
| 14       | 25MM OD HEAVY DUTY ALUMINUM WELD ON CLAMP                | GENFLEX/BHF/BMG         | 2    | 2         |
| 15       | User Library-Pipe Clamp<br>0750_Pipe Clamp 0750 Plastic  |                         | 2    | N/A       |
| 16       | 3mm x 40mm Split Pin                                     | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 17       | 25x40x4mm Nylon Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 6    | 6         |
| 18       | 25x40x4mm Steel Washer                                   | BOLT&NUT/BMG/BOLT & ENG | 4    | 4         |
| 19       | 116 Cstr-Wld(IMD-SL2-007-004)                            | STERLING                | 1    | 1         |
| 20       | 30x5 Flatbar 138mm                                       |                         | 1    | COUNTED   |
| 21       | 108 x 25mm Bright Steel Shaft                            |                         | 1    | COUNTED   |
| 22       | 166 x 25mm Bright Steel Shaft                            |                         | 1    | COUNTED   |
| 23       | 116 Cstr-Lnk(IMD-SL2-007-005)                            | STERLING                | 1    | 1         |
| 24       | 128515 Cstr-Sprt(IMD-SL2-008-001)<br>31.8X2mm Round Tube | MAC STEEL/NJR/GK        | 1    | 1420mm    |
| 25       | 116 Cstr-Mnt-Gst(IMD-SL2-007-009)                        | GK                      | 1    | 1         |
| 26       | 116 Cstr-Ylk(IMD-SL2-007-006)                            | STERLING                | 1    | 1         |
| 27       | 128515 Cstr-HndI(IMD-SL2-009-001)                        |                         | 1    | COUNTED   |
| 28       | 128515 Cstr-Ylk-Gst(IMD-SL2-007-008)                     | GK                      | 2    | 2         |

|                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                  |                                                          |                                                                  |      |        |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------|------|--------|----|
| GENERAL TOL EXCEPT OTHERWISE STATED:<br>0 - 6           ±0.1<br>6 - 10         ±0.2<br>10 - 30        ±0.3<br>30 - 100       ±0.5<br>100 - 300      ±0.8<br>300 - 1000    ±1.2<br>1000 - 3000< ±2.0<br>3000<         ±2.0<br>Angle         ±1°<br><br><b>UNITS: mm</b> | Except otherwise stated:<br>Remove all sharp edges and burrs: 0.3mm<br>Surface finish: 1.6 um<br>Screwthread: 6H 6g<br><br> | TITLE:<br><b>1000 X 1000 X 600 OIL DRIP TROLLEY V0.1</b> | Tel: 013 693 3777/6/5<br>Fax: 013 693 3781<br>www.ifsworld.co.za | Qty: | Scale: | A3 |
|                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                  | Material:<br>POWDERCOATED MS                             |                                                                  | 1    | 1:10   |    |
| DRG NR:<br><b>1000 X 1000 X 600 OIL DRIP TROLLEY V0.1</b>                                                                                                                                                                                                              | <br><b>FUEL &amp; LUBE HANDLING</b>                                                                                         | Sheet:                                                   | Date:                                                            | Rev: |        |    |
|                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                  | 1 of 1                                                   | 2014/08/11                                                       | 1    |        |    |
| COPYRIGHT:<br>This drawing is the property of IFS and may not be copied or carried over in full or any part thereof to a third party without written permission of IFS.                                                                                                |                                                                                                                                                                                                                  |                                                          |                                                                  |      |        |    |





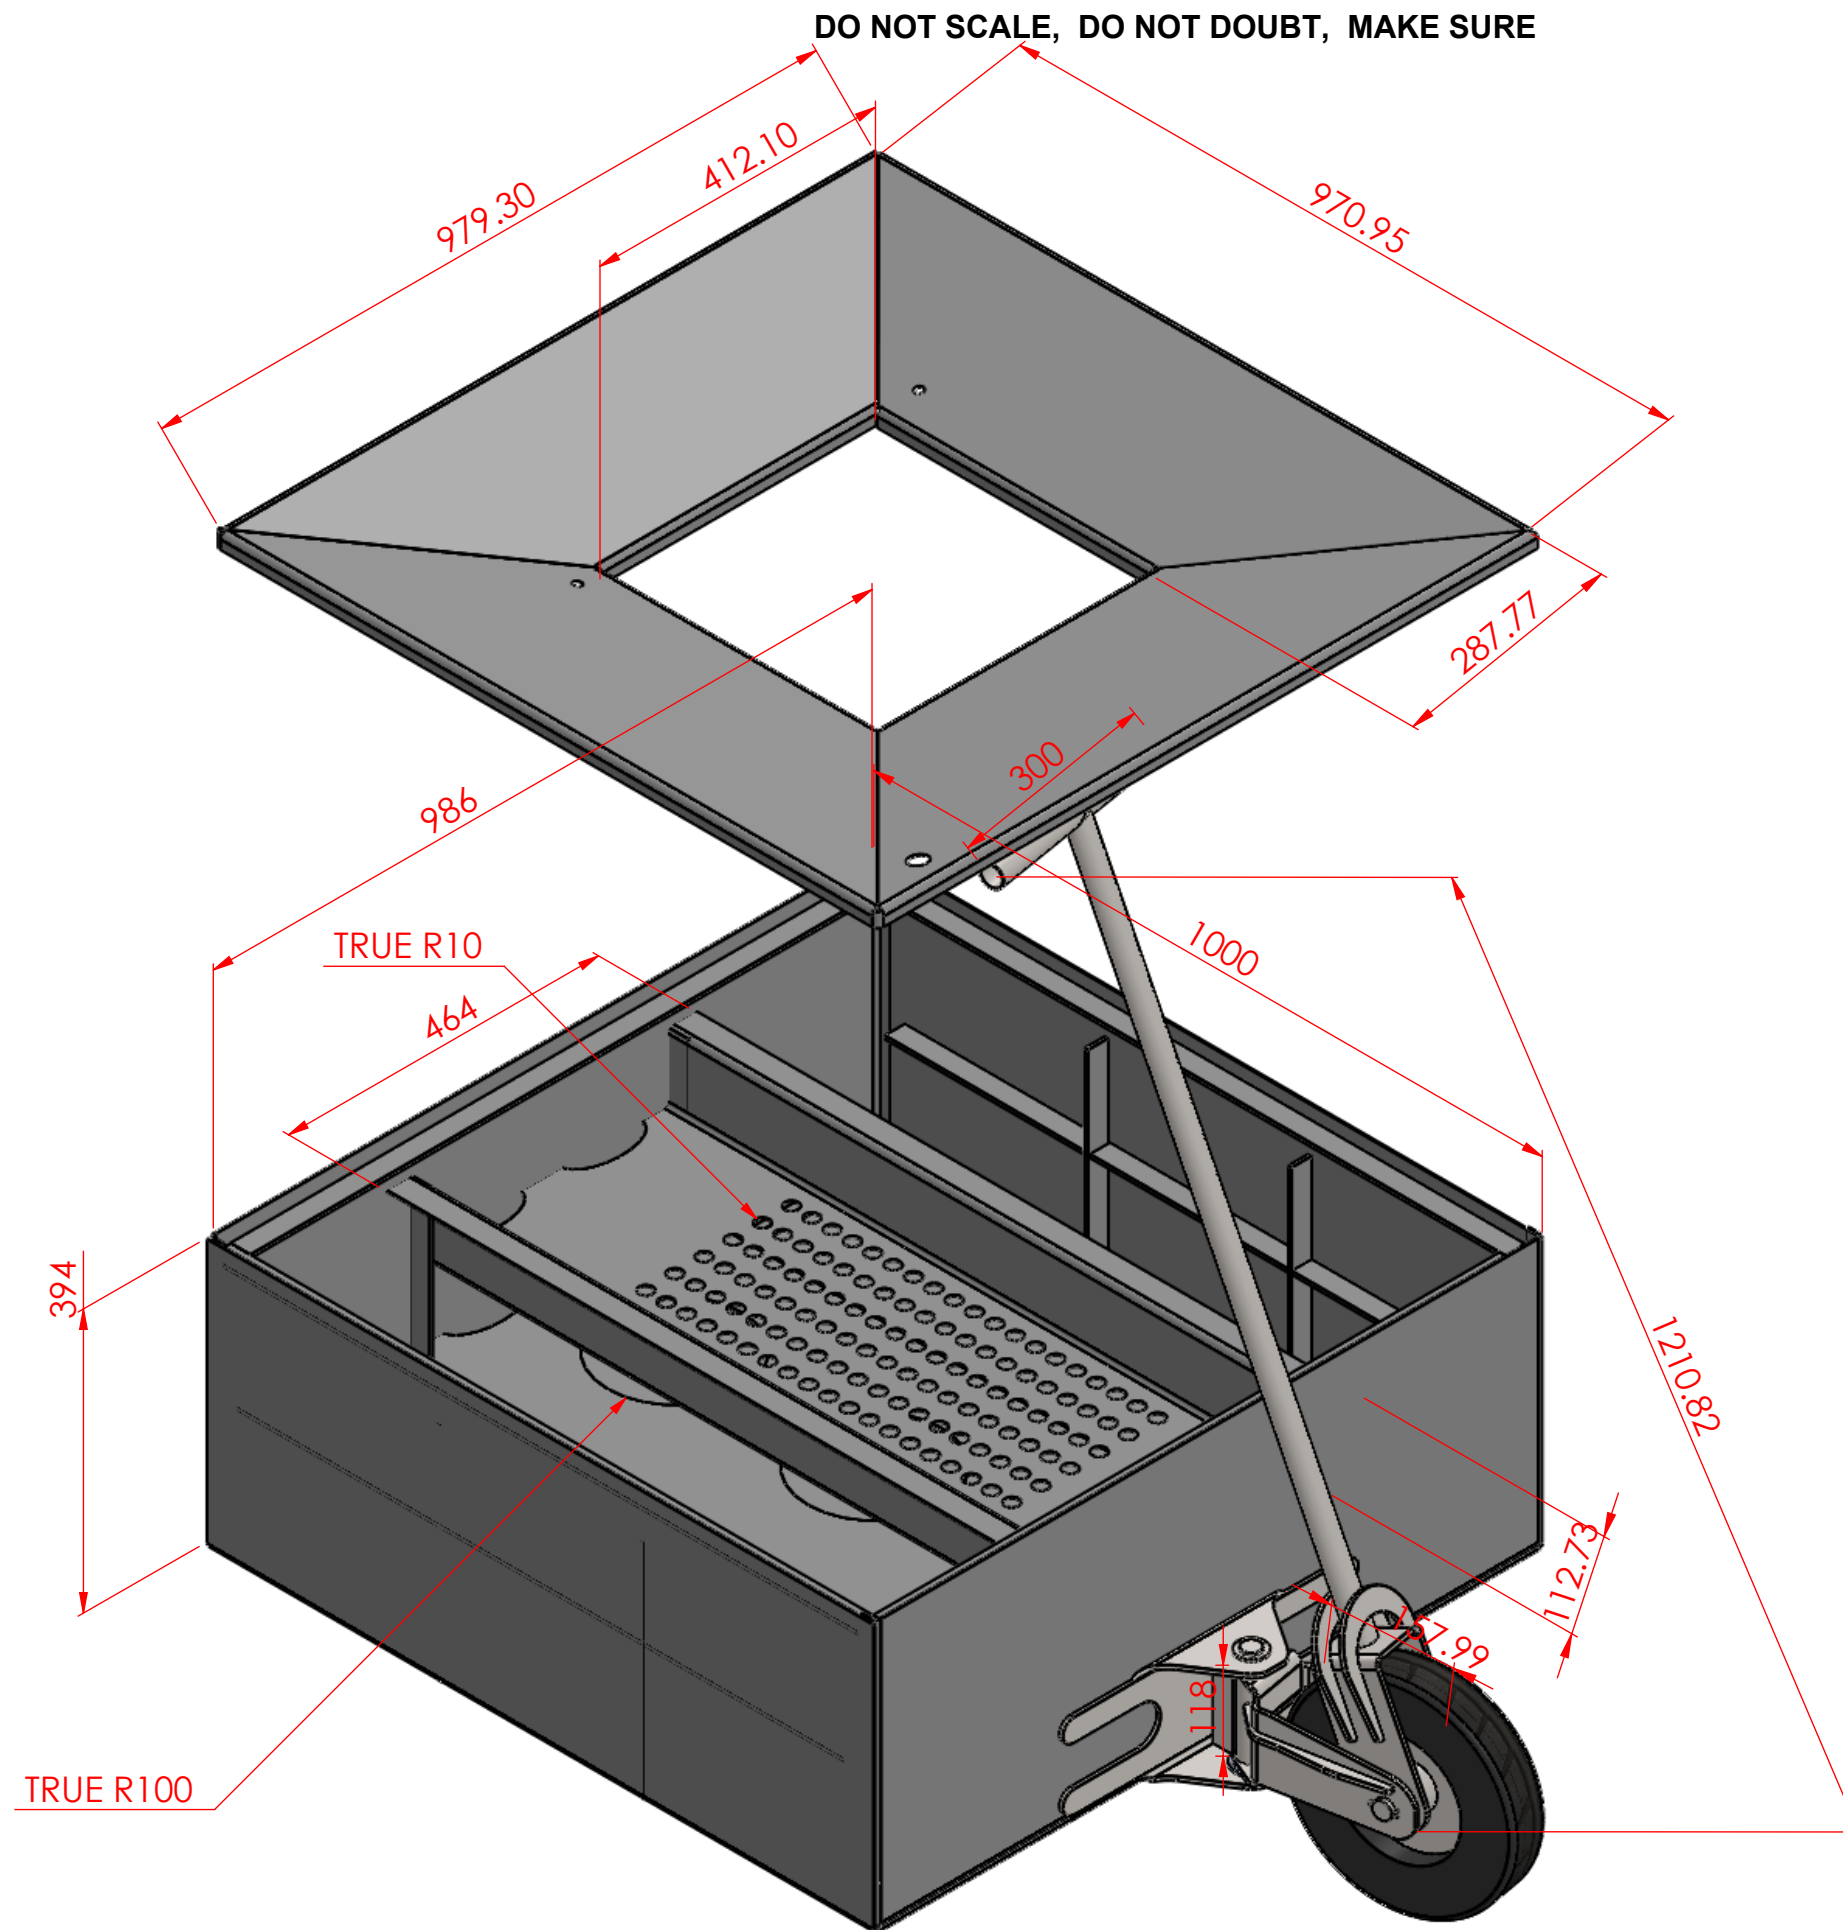

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g

DRG NR:

TITLE:  
**1000x1000x400 Oil Drip Trolley V0.1**


Material:

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

|        |            |      |
|--------|------------|------|
| Qty:   | Scale:     | A3   |
| 1      | 1:8        |      |
| Sheet: | Date:      | Rev: |
| 1 of 4 | 2014/08/21 | 1    |

COPYRIGHT:  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.




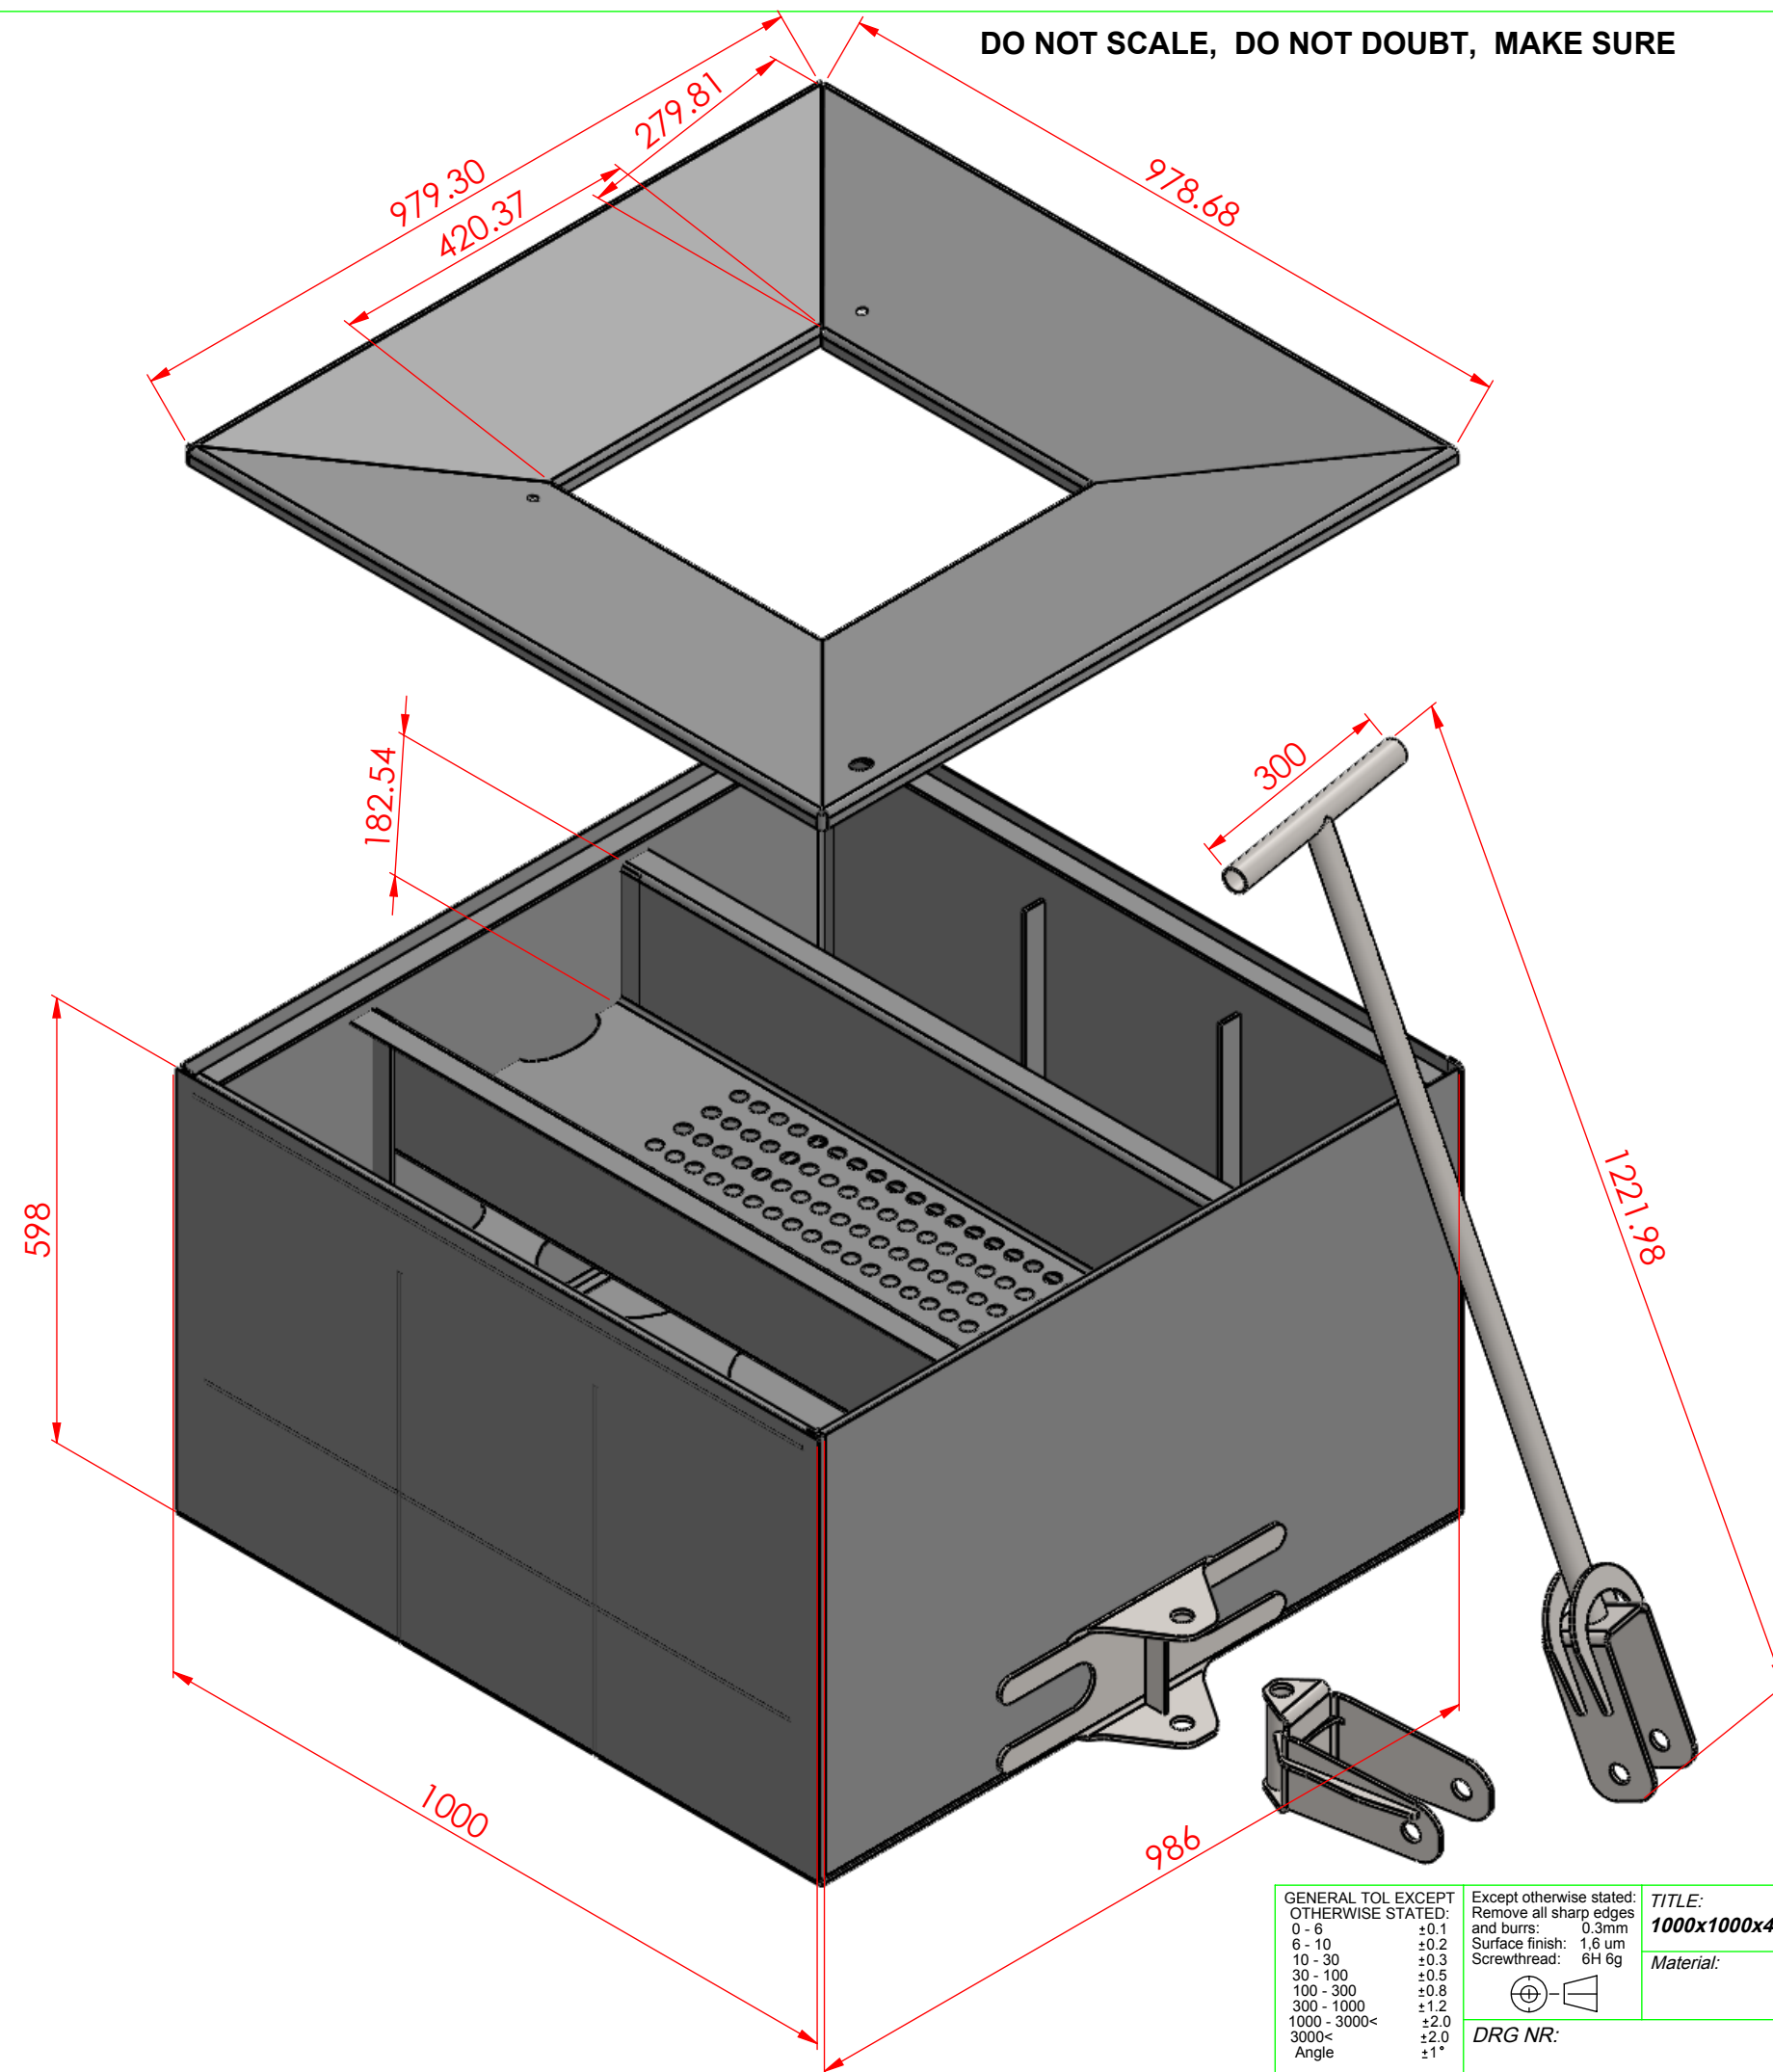

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g



DRG NR:

TITLE:  
**1000x1000x400 Oil Drip Trolley V0.1**

Material:

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za


|        |            |      |
|--------|------------|------|
| Qty:   | Scale:     | A3   |
| 1      | 1:8        |      |
| Sheet: | Date:      | Rev: |
| 2 of 4 | 2014/08/21 | 1    |

COPYRIGHT:  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.






DO NOT SCALE, DO NOT DOUBT, MAKE SURE

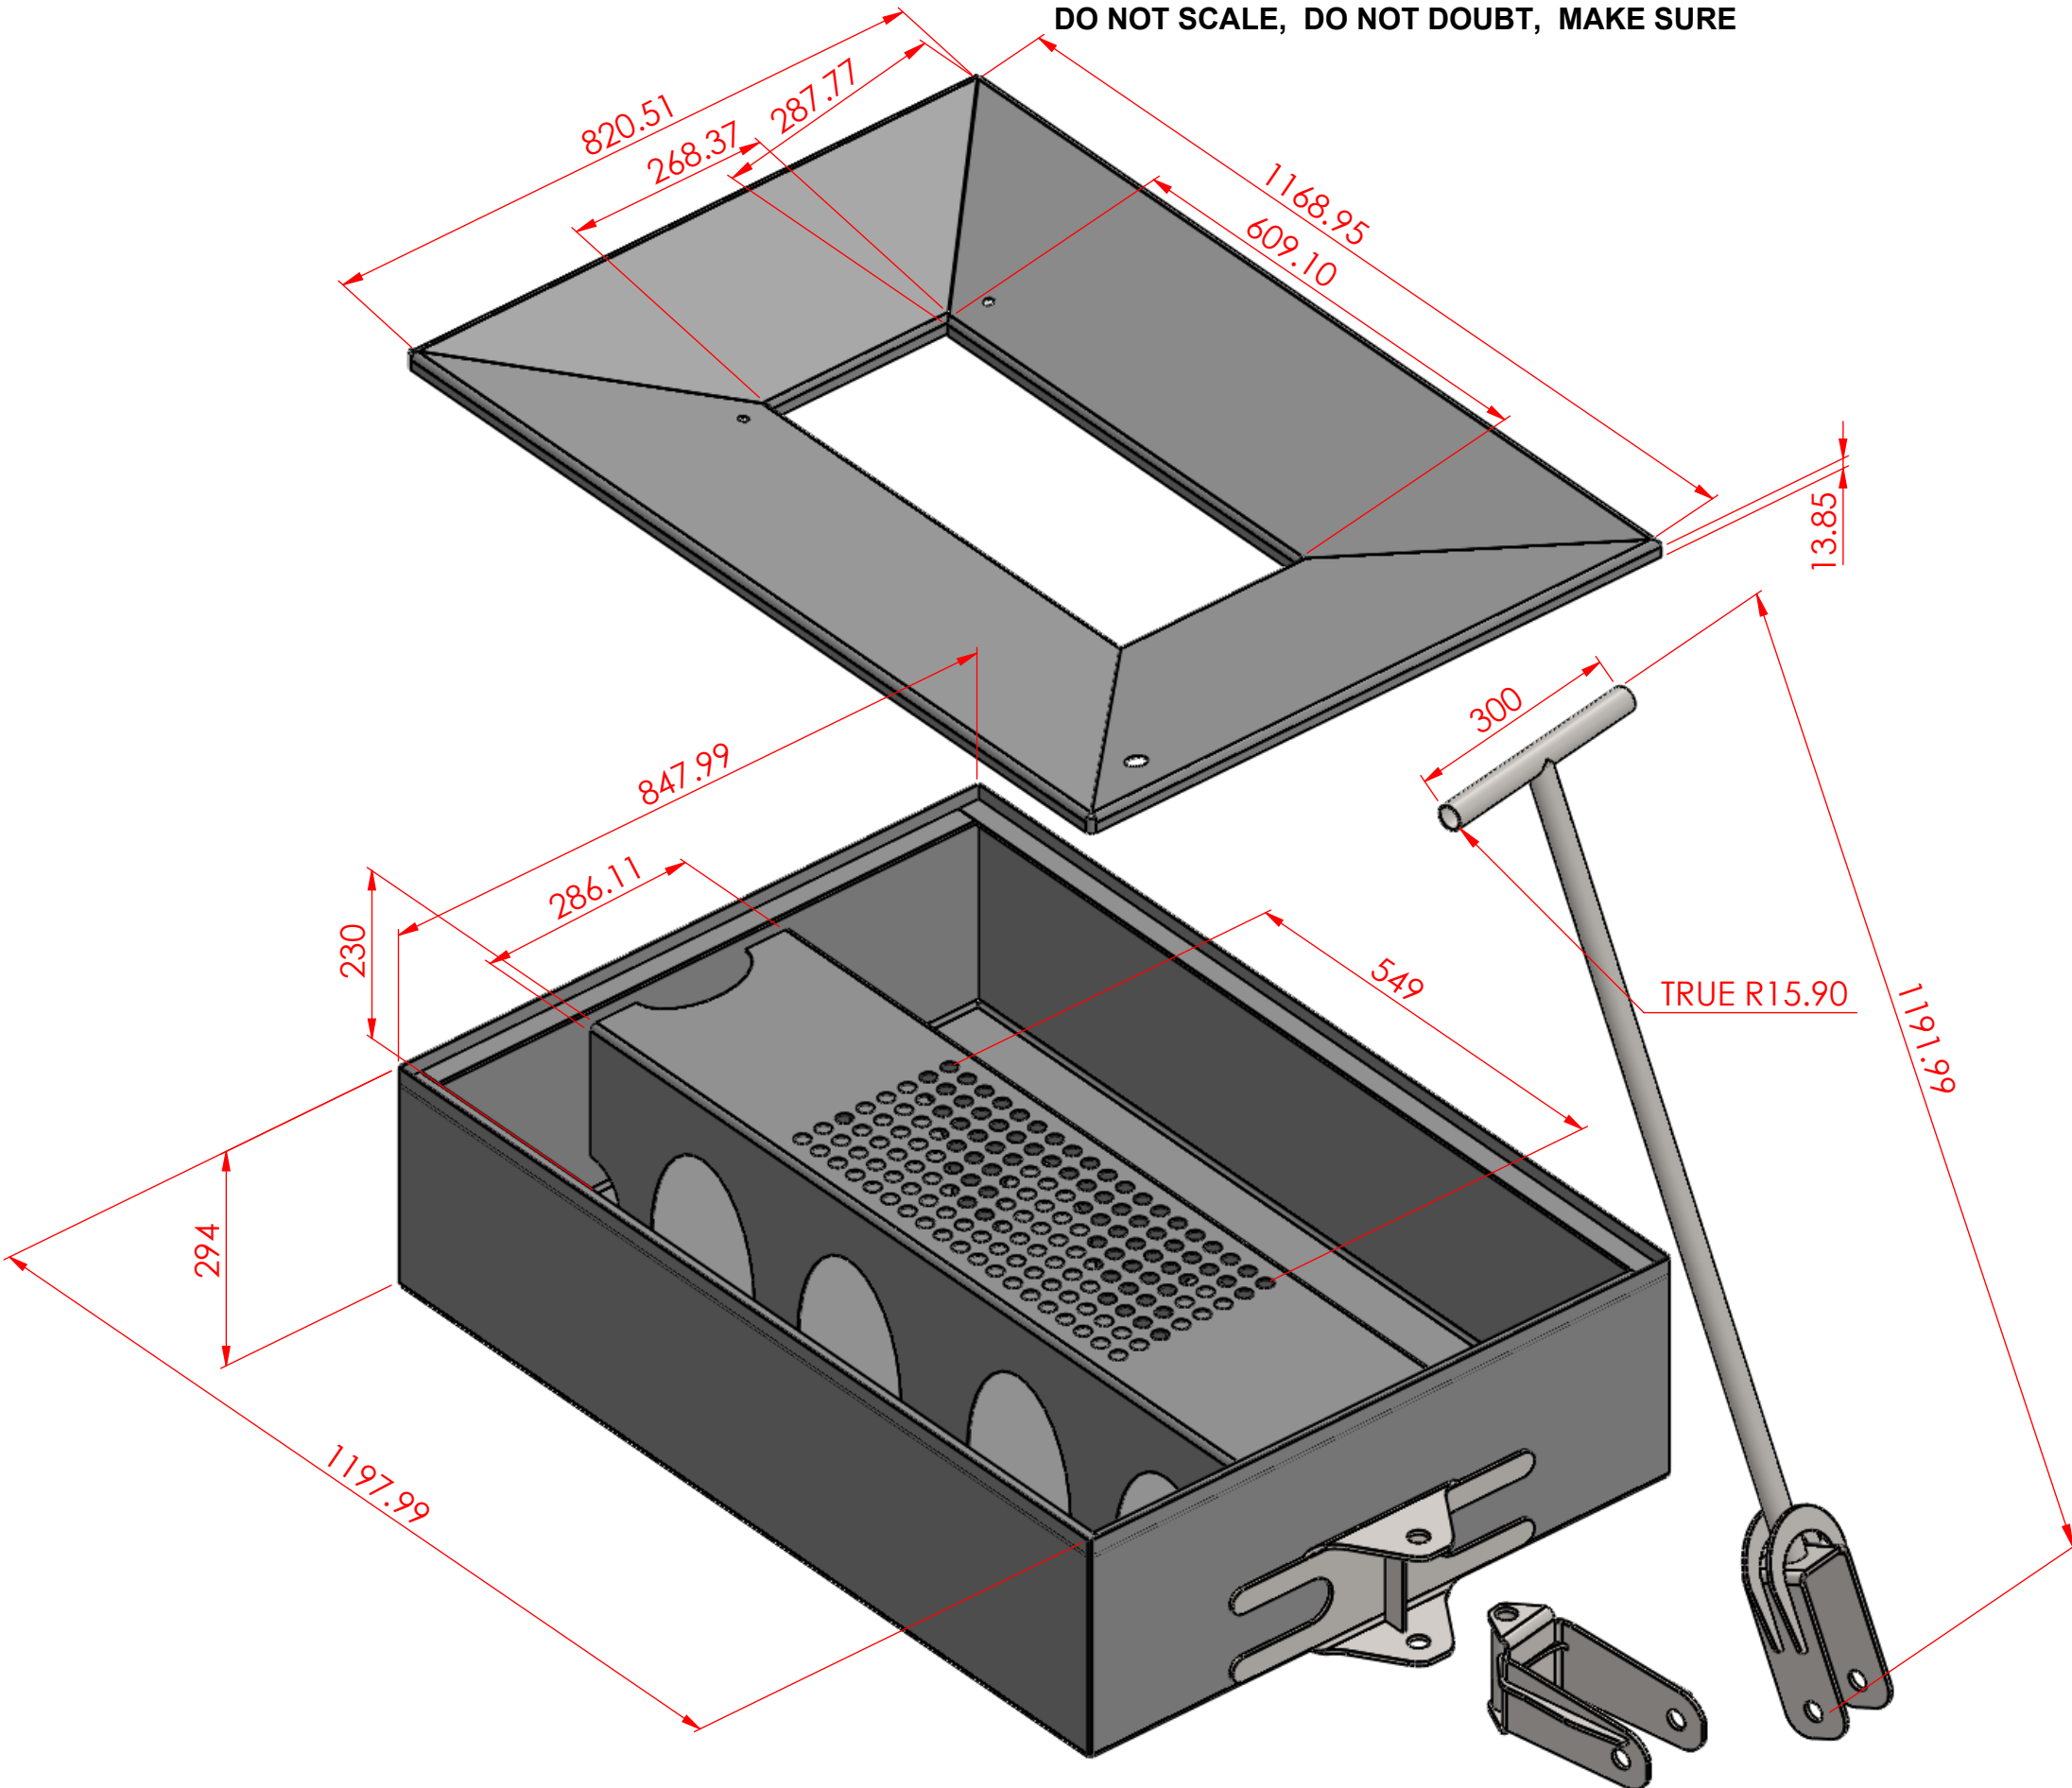

GENERAL TOL EXCEPT  
OTHERWISE STATED:  
0 - 6 ±0.1  
6 - 10 ±0.2  
10 - 30 ±0.3  
30 - 100 ±0.5  
100 - 300 ±0.8  
300 - 1000 ±1.2  
1000 - 3000 ±2.0  
3000 < ±2.0  
Angle ±1°

UNITS: mm

Except otherwise stated:  
Remove all sharp edges  
and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g



DRG NR:

TITLE:  
**1200x850x300 Oil Drip Trolley V0.1**

Material:

Tel: 013 693 3777/6/5  
Fax: 013 693 3781  
www.ifsworld.co.za

Qty:  
**1**

Scale:  
**1:8**

**A3**

Sheet:  
**3 of 4**

Date:  
**2014/08/21**

Rev:  
**1**



COPYRIGHT:  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.

Exploded view diagram of a 1200x850x150 Oil Drip Trolley V0.1. The diagram shows three main components: a top cover, a base tray, and a handle assembly. The top cover is a rectangular frame with dimensions 820.51 (width), 1168.95 (depth), and 609.10 (inner width). The base tray is a rectangular box with dimensions 1199.99 (length), 849.99 (width), and 144 (height). The handle assembly consists of a long handle (1170.99) and a bracket (231.05). The handle has a diameter of 300 and a radius of TRUE R15.90. The bracket has a height of 118. The base tray has a central perforated area and a handle cutout. Dimensions are provided in millimeters.

**GENERAL TOL EXCEPT OTHERWISE STATED:**

|            |      |
|------------|------|
| 0 - 6      | ±0.1 |
| 6 - 10     | ±0.2 |
| 10 - 30    | ±0.3 |
| 30 - 100   | ±0.5 |
| 100 - 300  | ±0.8 |
| 300 - 1000 | ±1.2 |

Except otherwise stated:  
Remove all sharp edges and burrs: 0.3mm  
Surface finish: 1.6 um  
Screwthread: 6H 6g

**TITLE:**  
**1200x850x150 Oil Drip Trolley V0.1**

**Material:**

**COPYRIGHT:**  
This drawing is the property of IFS  
and may not be copied or carried over in  
full or any part thereof to a third party  
without written permission of IFS.

