



**IGEBA<sup>TM</sup>**

WORLD-CLASS THERMAL FOGGERS



STATE OF THE ART R&D



NATIONWIDE NETWORK



COMPREHENSIVE SOLUTIONS

*Protecting Your World<sup>TM</sup>*




## OUR PRODUCT RANGE



TF 34



TF 35

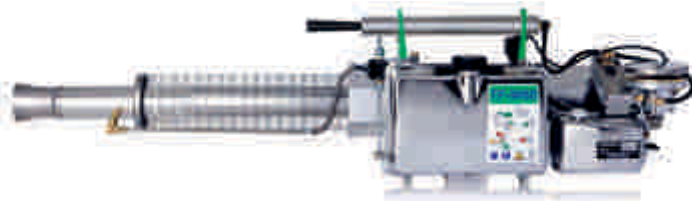


TF-W 60



TF 65



TF 95

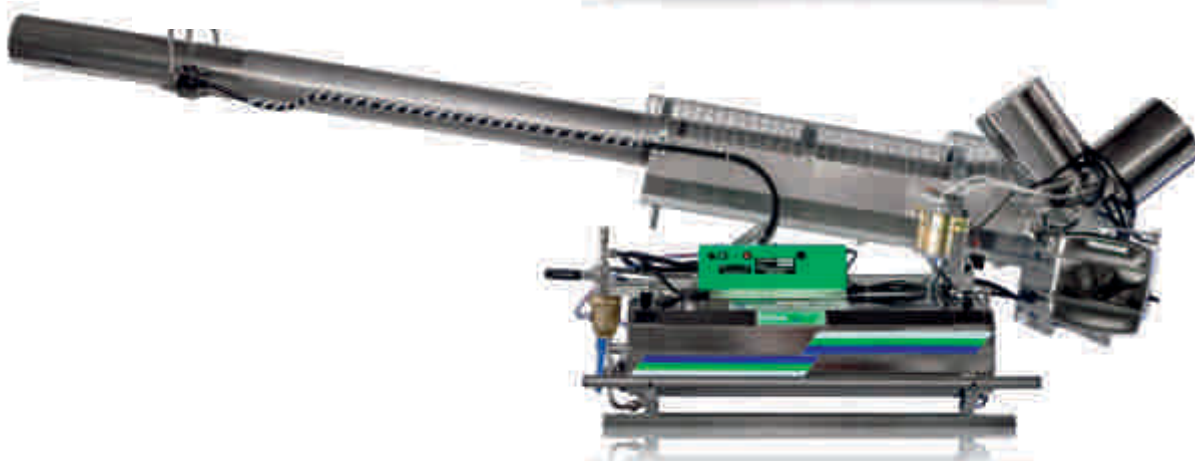

TF 160

IGEBA thermal fog generators have proved reliability in many fields and industries since the early 1980s. Knowledge, competence & experience is translated into new designs, technical developments & constant improvements. From vector and pest control to agriculture and hygiene management, operators all over the world trust IGEBA thermal fog generators.

## RANGE & QUALITY

The IGEBA TF-34 was designed with the main objective of indoor fogging. Compact size, light weight & excellent emission values, of course it is for outdoors too.



The IGEBA TF-35, a masterpiece in its class, is the first choice for professional universal application. These foggers are approved & acknowledged worldwide & manufactured in accordance with international standards & PCO requirements.

The models from the new TF-65 up to the "Jumbo" (TF-160) are made for large scale treatments & offers additional advantages & flexibility for multi-purpose use in-&-outdoors. Only high-quality materials, like stainless steel are used, combined with the best components available. This leads to a long life of the devices & ensures efficiency and operational safety.

## APPLICATION

The use of environmentally compatible technologies is to help prevent environmental damages with minimum application quantities per surface area. IGEBA thermal fog generators produce a dense insecticide fog. This takes immediate action with the right active ingredient and destroys both flying and crawling insects. In suitable weather conditions the fog passes outdoors, if authorised an affected area in very short time. Due to the little application quantity, the environmental contamination is minimized, without influencing the high sufficiency of the used solution over fly & insect nuisance.

## TECHNICAL DATA

These generators can be ordered without solution tank, but with a suction pump (2 V. DC).

All generators are also available as "W" – Version for the application of water based formulations!

Theoretical values based on the energy of the consumed fuel.

IGEBA reserves the right of technical modification without prior notice.

| MODEL                                                                                  | TF 34                        | TF35                          | TF-W 60                         | TF65                  | TF95HD*               | TF160 HD*           |
|----------------------------------------------------------------------------------------|------------------------------|-------------------------------|---------------------------------|-----------------------|-----------------------|---------------------|
| Weight, empty in kg, approx.                                                           | 6.6                          | 7.9                           | 12.8                            | 17.7                  | 39.5                  | 65                  |
| Dimension in cm L x W H                                                                | 78x27x34                     | 137,5x27x34                   | 138x38x34                       | 184x45x51             | 198x62x58             | 262x62x70           |
| Solution tank capacity in l                                                            | 5.7                          | 5.7 or 10                     | 5.7 or 10                       | 20(PE-HD)             | 60                    | 60                  |
| Fuel tank capacity in l                                                                | 1.2                          | 1.2                           | 2.5                             | 5.5                   | 5.5                   | 10                  |
| Fuel consumption in l/h, approx.                                                       | 1.1                          | 2.0                           | 3.6                             | 4.0                   | 4                     | 9                   |
| Performance of combustion' Chamber in KW/HP.                                           | 10/13.6                      | 18.3/24.8                     | 33/45                           | 36.8/50               | 36.8/50               | 82.5/112            |
| Average flow rate in l/h of (oil base), approx.                                        | 15                           | 20                            |                                 | 50                    | 60                    | 120                 |
| Maximum flow rate in l/h of oil                                                        | 25                           | 42                            |                                 | 75                    | 100                   | 160                 |
| Flow rate with water in l/h, approx.                                                   |                              | 10                            | 30                              | 40                    | 40                    | 80                  |
| Efficient horizontal reach in closed rooms using water and carrier, i.e."Nebol", in m, |                              | 40                            | 60                              | 60                    | 60                    | 120                 |
| Efficient horizontal reach in closed rooms using                                       |                              | 8                             | 30                              | 35                    | 35                    | 80                  |
| Energy                                                                                 | 4X1.5V batteries LR6 or LR20 | 4X1.5V batteries LR6 (optiona | 4X1.5V batteries LR6 (optional) | 4X1.5V batteries LR20 | 4X1.5V batteries LR20 | 12 V DC car battery |
| Pressure in the solution tank in bar, approx.                                          | 0.25                         | 0.25                          | 0.3                             | 0.3                   | 0.3                   | 0.3                 |

## ACCESSORIES

Our thermal fog generators can be supplied according to your specific requirement. The "W-designs" have been specially designed to fog agents dissolved in water, e.g. fungicides. Even for acid based disinfectants, special resistant execution are available. A remote control can be ordered for the IGEBA TF-95 & TF-160, making such application ideal for mounting on cab. All units are available with cut-off device.

## MAIN FIELDS OF APPLICATION:



- VECTOR & PEST CONTROL (PUBLIC HEALTH)
- STORED PRODUCTS PROTECTION
- DISINFECTION/AGRICULTURE
- BIRD CONTROL
- PLANT PROTECTION GREEN HOUSES
- FIELD CROPS PROTECTION  
(E.G. COCOA, RUBBER, COFFEE, OIL PALM ETC...)

## PRODUCT FEATURES:

- |                                                    |                                       |                                     |
|----------------------------------------------------|---------------------------------------|-------------------------------------|
| ✓ CAN BE USED WITH DIFFERENT CHEMICALS / COMPOUNDS | ✓ LIGHT WEIGHT & EFFICIENT            | ✓ FOR INDOOR & OUTDOOR USES         |
| ✓ SAFE & EASY TO MAINTAIN                          | ✓ ACCESSORIES AVAILABLE               | ✓ REMOTE CONTROL AVAILABLE          |
| ✓ INTERNATIONAL STANDARDS (HACCP COMPLIANT)        | ✓ DURABLE - MADE FROM STAINLESS STEEL | ✓ SUCTION PUMP MODEL ALSO AVAILABLE |
| ✓ 1 YEAR WARRANTY                                  |                                       |                                     |

Your nearest PCI office:

[www.pestcontrolindia.com](http://www.pestcontrolindia.com)  
SMS: PEST 54242

THE **#1** PEST  
MANAGEMENT COMPANY IN INDIA

**220**  
OFFICES NATIONWIDE

**5500**  
TRAINED PERSONNEL



**Pest Control (India) Pvt. Ltd.**

Regd Office: 36, Yusuf Building, MG Rd, Fort, Mumbai 400001, Maharashtra, INDIA. Helpline: 022 2686 5656 Email: [corporate@pci.in](mailto:corporate@pci.in) CIN: U74140MH1954PTC009347.

© Pest Control (India) Pvt. Ltd. All content and pictures used in the brochure are the intellectual property of Pest Control (India) Pvt. Ltd. Reproduction of design, pictures, content in any medium is strictly prohibited and subject to prosecution.