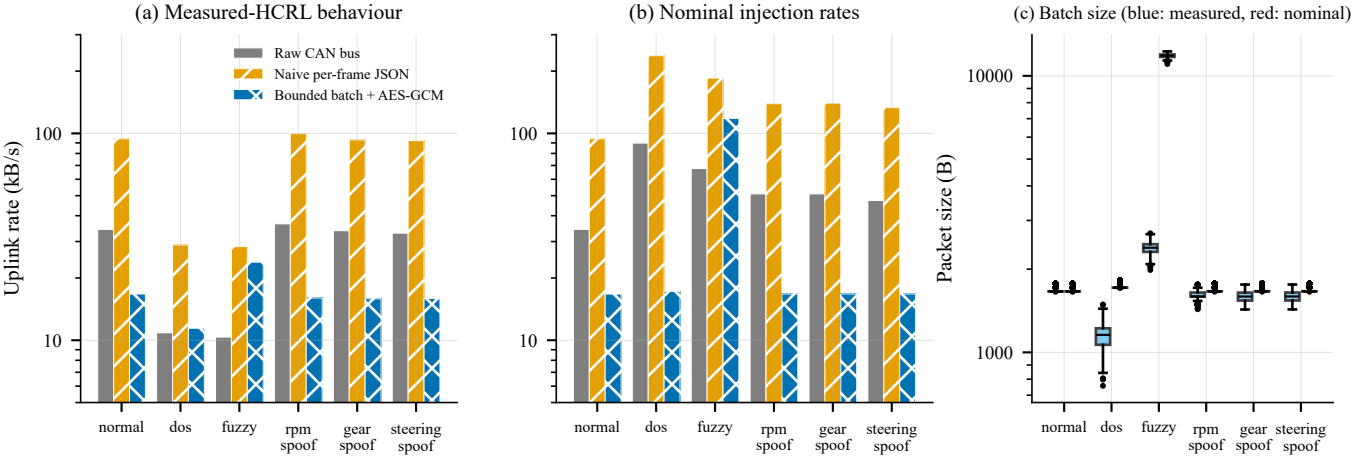
(a) Measured-HCRL behaviour
(b) Nominal injection rates
(c) Batch size (blue: measured, red: nominal)
Raw CAN bus
Naive per-frame JSON
Bounded batch + AES-GCM
Uplink rate (kB/s)
100
10
Packet size (B)
10000
1000
normal
dos
fuzzy
rpm spoof
gear spoof
steering spoof