
ROLLER Ø114.3 × 40 — one station, two identical drums

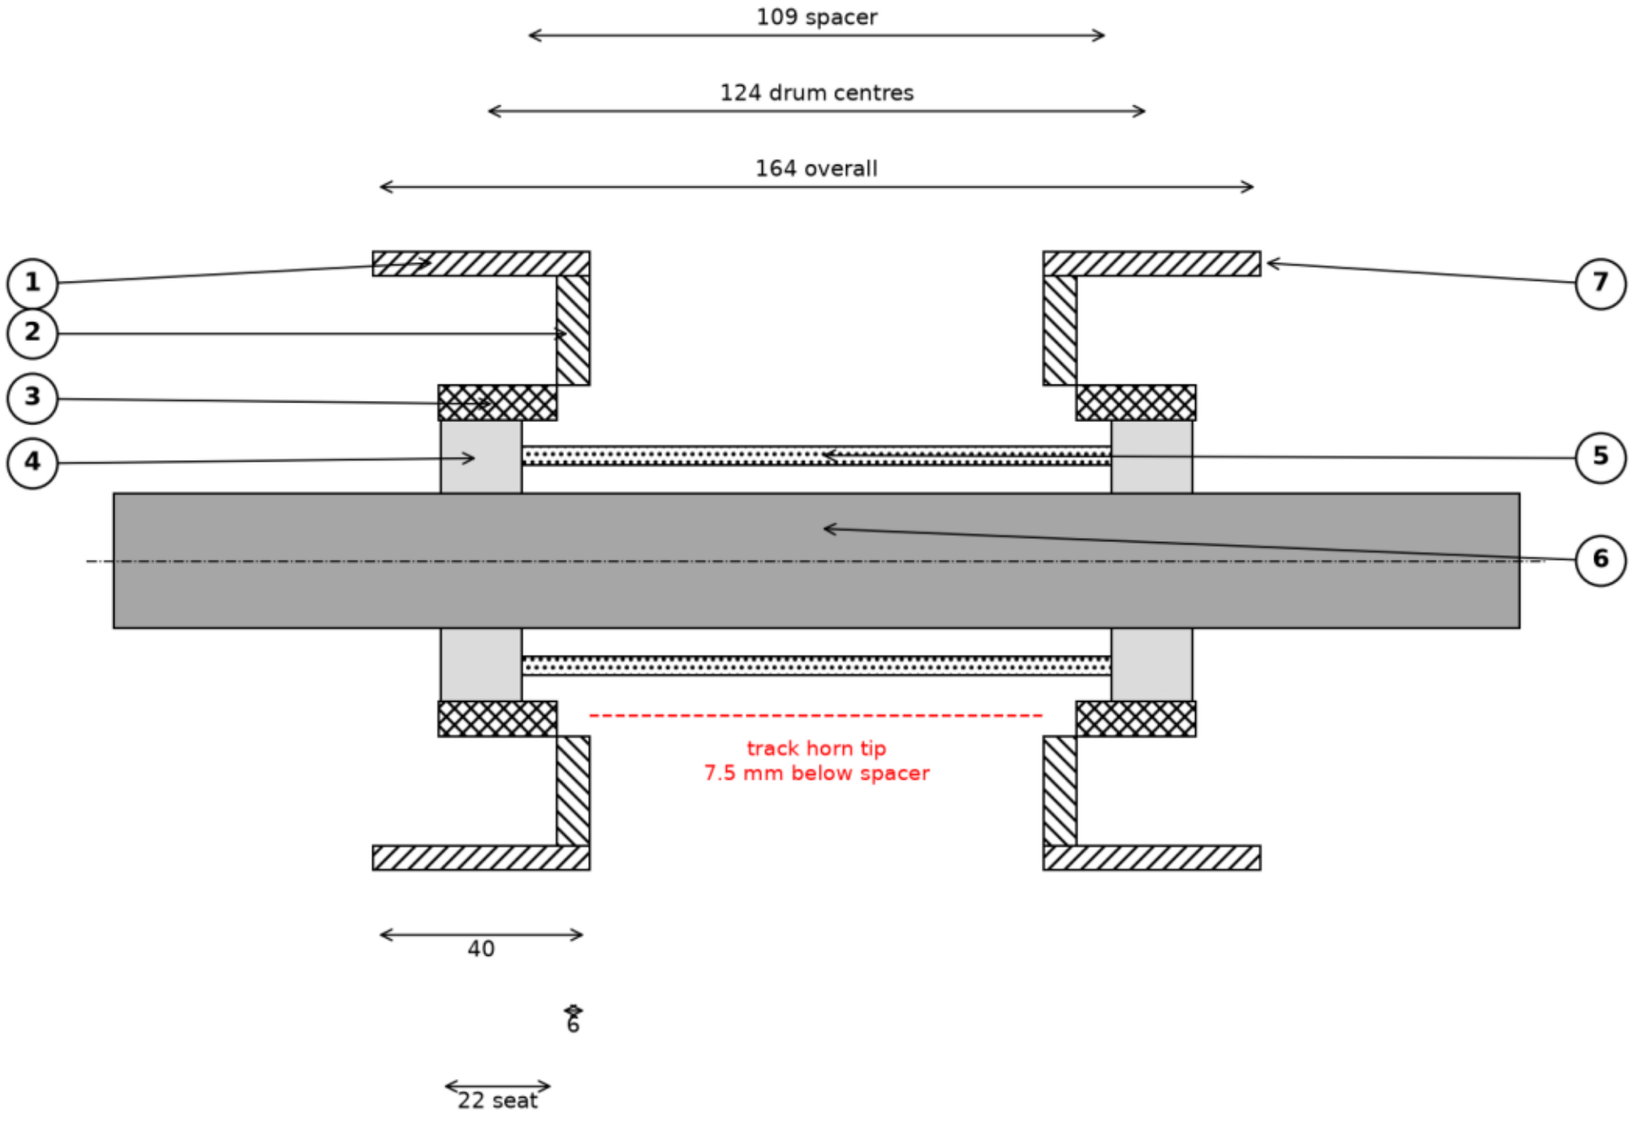

ROLLER

1 PIPE Ø114.3 × 4.5 wall × 40

2 BACKPLATE 6, welded inside pipe

3 BEARING SEAT 65/52 × 22, welded to backplate, 52H7

4 6205-2RS (25 × 52 × 15), press fit

5 SPACER 42.4/35.5 × 109, loose, between bearing inner races

6 SHAFT Ø25 × 260, press fit (no Loctite)

7 OPEN OUTER END (cap optional)

Two identical drums at ±62.
Mass 3.54 kg/station.
No Loctite. No ring stack.

NOTES

1. V3 simple spool replaces the paired-disc roller.
2. Track horn tip shown; clearance to spacer 7.5 mm.
3. Belt/plates/machine envelope per GA-001/GA-002.
4. 2 identical drums; bearing at tread centre.
5. No Loctite, no ring stacks, no central weld.

FLAIL MOWER 500 / UC-V2

SECTION A-A - ROLLER STATION (V3)

DWG No. **UCV2-GA-003**
REV A

MATERIAL	QTY / MASS	UNITS: mm
MS / E250 / EN8	1 station / 3.54 kg	1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
NTS	A3	3 / 14	2026-10-29	OC