
ROLLER Ø114.3 × 40 — one station, two identical drums

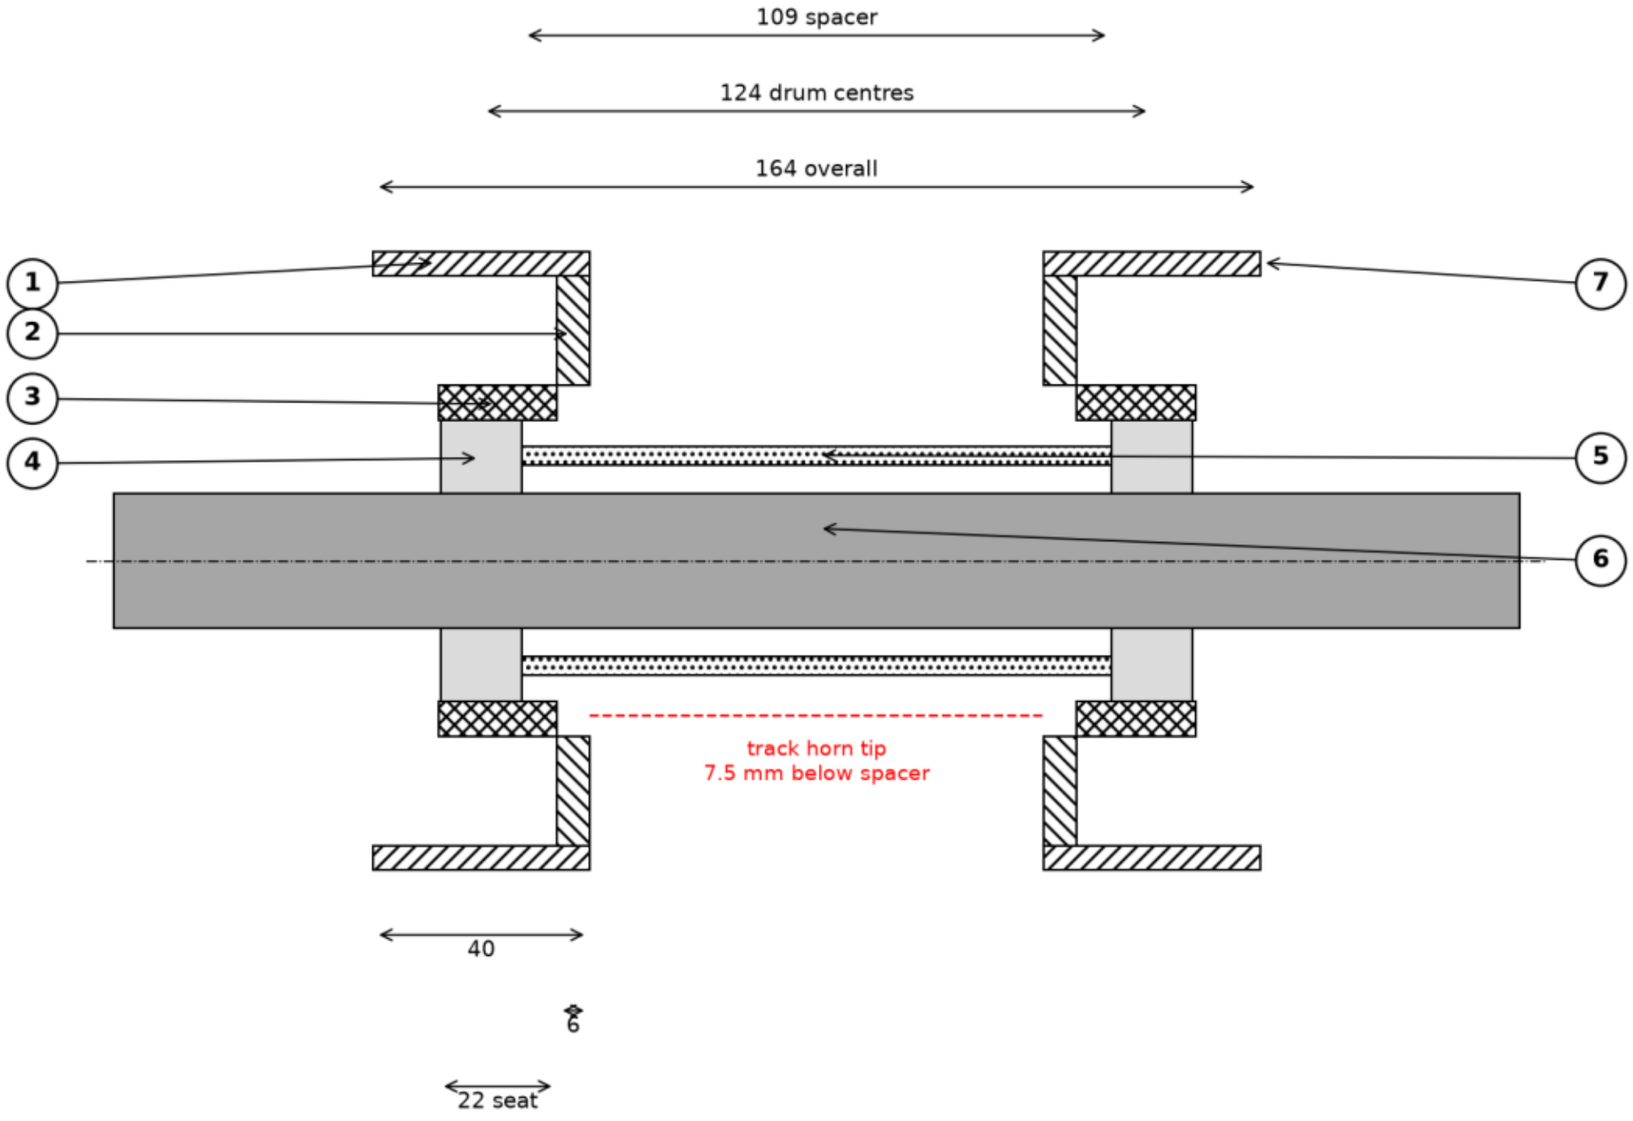

ROLLER

1 PIPE Ø114.3 × 4.5 wall × 40

2 BACKPLATE 6, welded inside pipe

3 BEARING SEAT 65/52 × 22, welded to backplate, 52H7

4 6205-2RS (25 × 52 × 15), press fit

5 SPACER 42.4/35.5 × 109, loose, between bearing inner races

6 SHAFT Ø25 × 260, press fit (no Loctite)

7 OPEN OUTER END (cap optional)

Two identical drums at ±62.
Mass 3.54 kg/station.
No Loctite. No ring stack.

NOTES

1. V3 simple spool: 2 identical drums per station at +/-62.
2. Pipe + backplate + welded 65/52x22 seat; 52 H7 after welding.
3. 6205 outer race press in seat; inner race press on Ø25 shaft.
4. Loose 42.4/35.5x109 spacer between bearing inner races.
5. No Loctite, no ring stack, no central weld; open outer end.
6. Bearing at tread centre; track horn clearance 7.5 mm.

FLAIL MOWER 500 / UC-V2

ROLLER STATION V3 - SIMPLE SPOOL

DWG No.
UCV2-P-002
REV A

MATERIAL	QTY / MASS	UNITS
MS / E250 / EN8	12 drums / 3.54 kg/stn	**mm**, 1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
NTS	A3	6 / 14	2026-10-29	OC