
IDLER Ø200 × 40 — one station, two identical drums

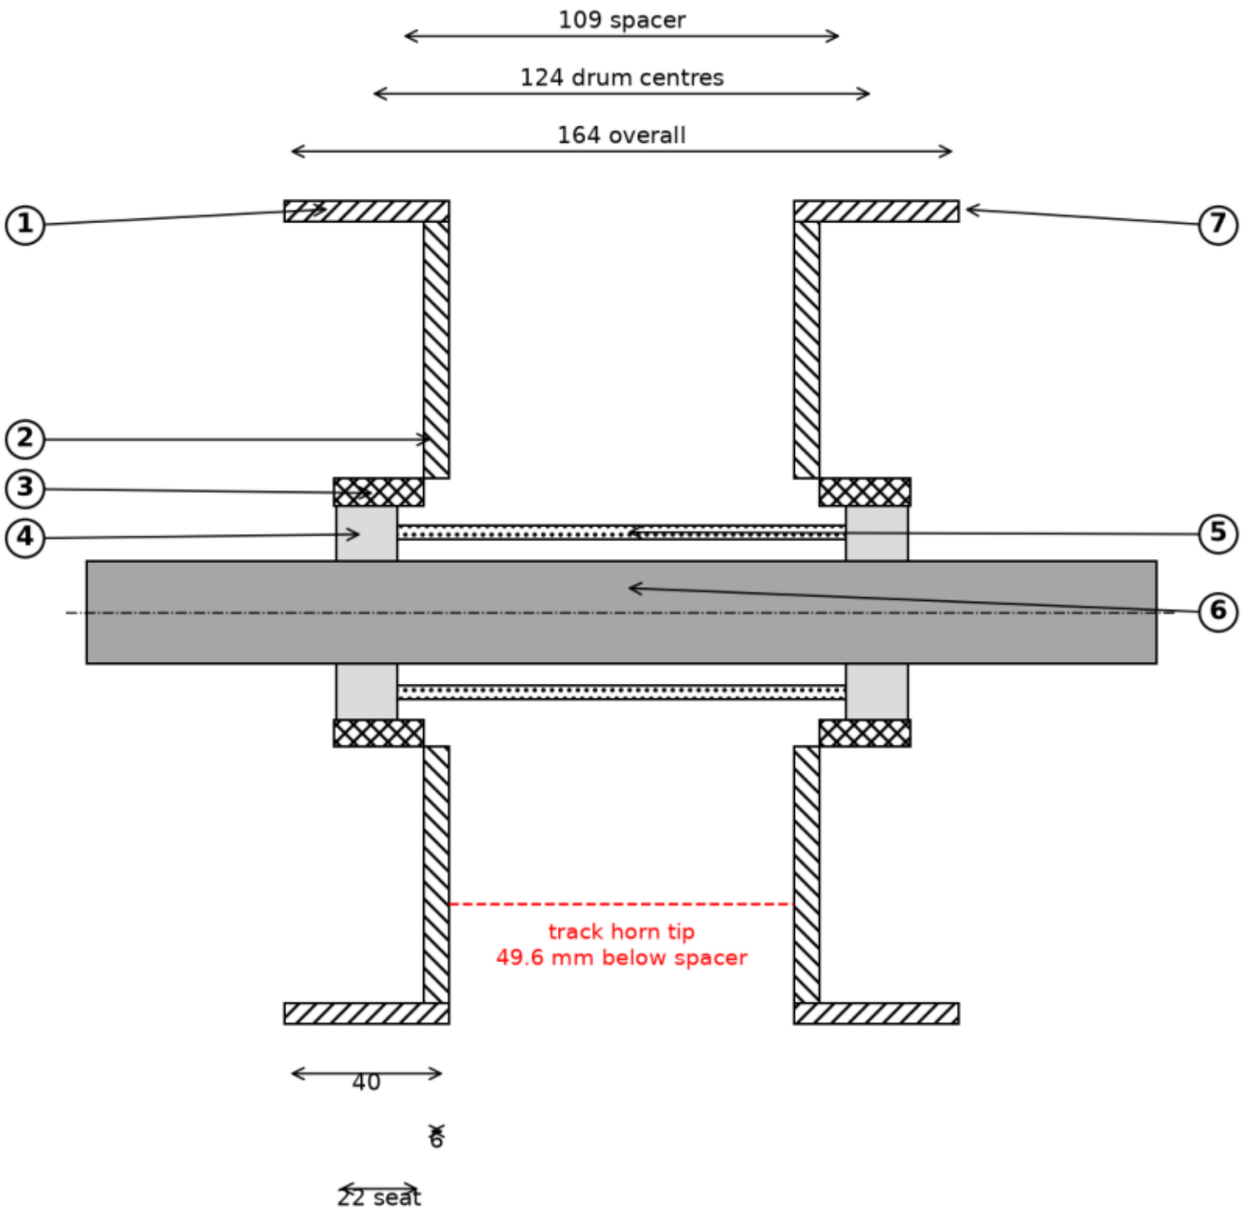

IDLER

1 PIPE Ø200.0 × 5.0 wall × 40

2 BACKPLATE 6, welded inside pipe

3 BEARING SEAT 65/52 × 22,
welded to backplate, 52H7

4 6205-2RS (25 × 52 × 15), press fit

5 SPACER 42.4/35.5 × 109, loose,
between bearing inner races

6 SHAFT Ø25 × 260, press fit
(no Loctite)

7 OPEN OUTER END (cap optional)

Two identical drums at ±62.
Mass 6.33 kg/station.
No Loctite. No ring stack.

NOTES

1. V3 simple spool: 2 identical drums per station at +/-62.
2. 200 OD x5 pipe + backplate + welded 65/52x22 seat.
3. 6205 press fits; loose 42.4/35.5x109 spacer.
4. No Loctite, no ring stack, no central weld.
5. Idler pipe bore clears track horn by 24.2 mm.
6. Same Ø25 shaft/collars as the roller station.

FLAIL MOWER 500 / UC-V2

IDLER STATION V3 - SIMPLE SPOOL

DWG No. **UCV2-P-003**
REV A

MATERIAL: MS / E250 / EN8

QTY / MASS: 4 drums / 6.33 kg/stn

UNITS: mm
1st ANGLE

SCALE: NTS

SIZE: A3

SHEET: 7 / 14

DATE: 2026-10-29

DRAWN: OC