D25 SHAFT (1:2)

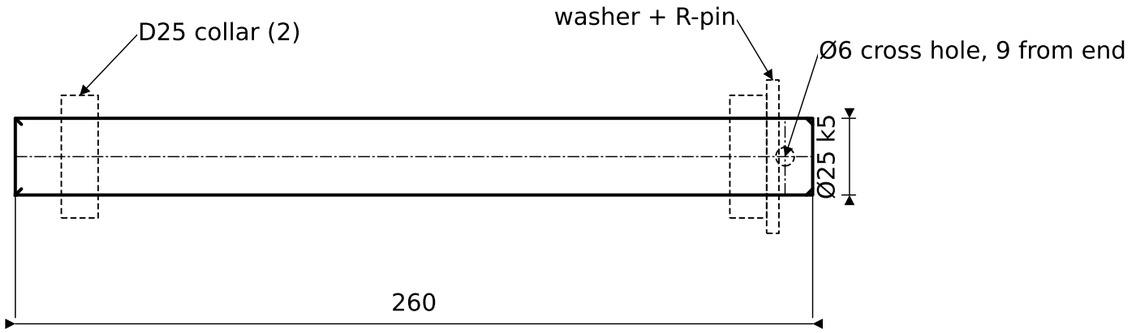

D40 AXLE (1:2)

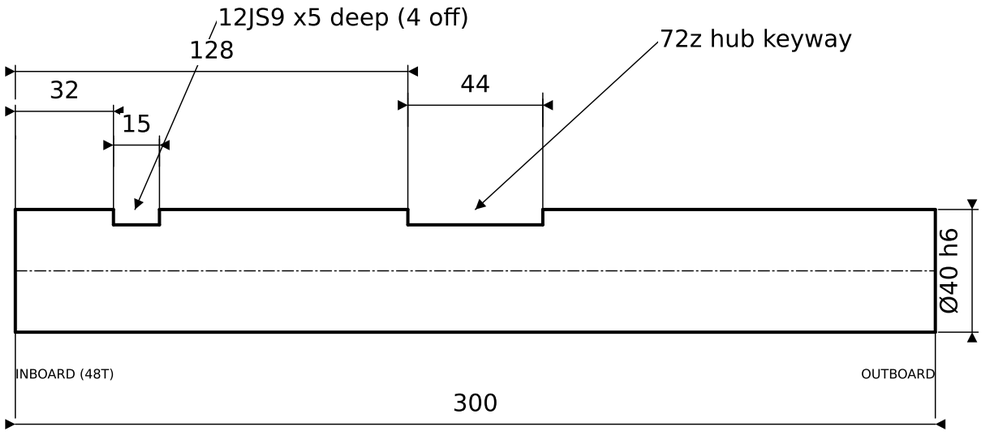

NOTES

1. D25 shafts: 8 off L260, EN8; bearing seats Ø25 k5, ends g6; 1x Ø6 cross hole 9 from outboard end.
2. D40 axles: 2 off L300, EN8, h6; 4 keyways 12JS9 x5 deep (outsource).
3. Axle keyways: 32..47 and 128..172 from the 48T (inboard) end.
4. Collars/washer/R-pin shown dashed for position only (COTS).
5. Chamfer 1x45 both ends; protect keyways with tape for paint.

FLAIL MOWER 500 / UC-V2

SHAFT D25 x260 & AXLE D40 x300

DWG No. **UCV2-P-004**

REV A

MATERIAL: EN8 (bright)

QTY / MASS: 8 + 2 / 1.00 / 2.93 kg

UNITS: mm

1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
1:2	A3	8 / 14	2026-10-29	OC