
ROLLER Ø114.3 × 40 mm — one station, two identical drums

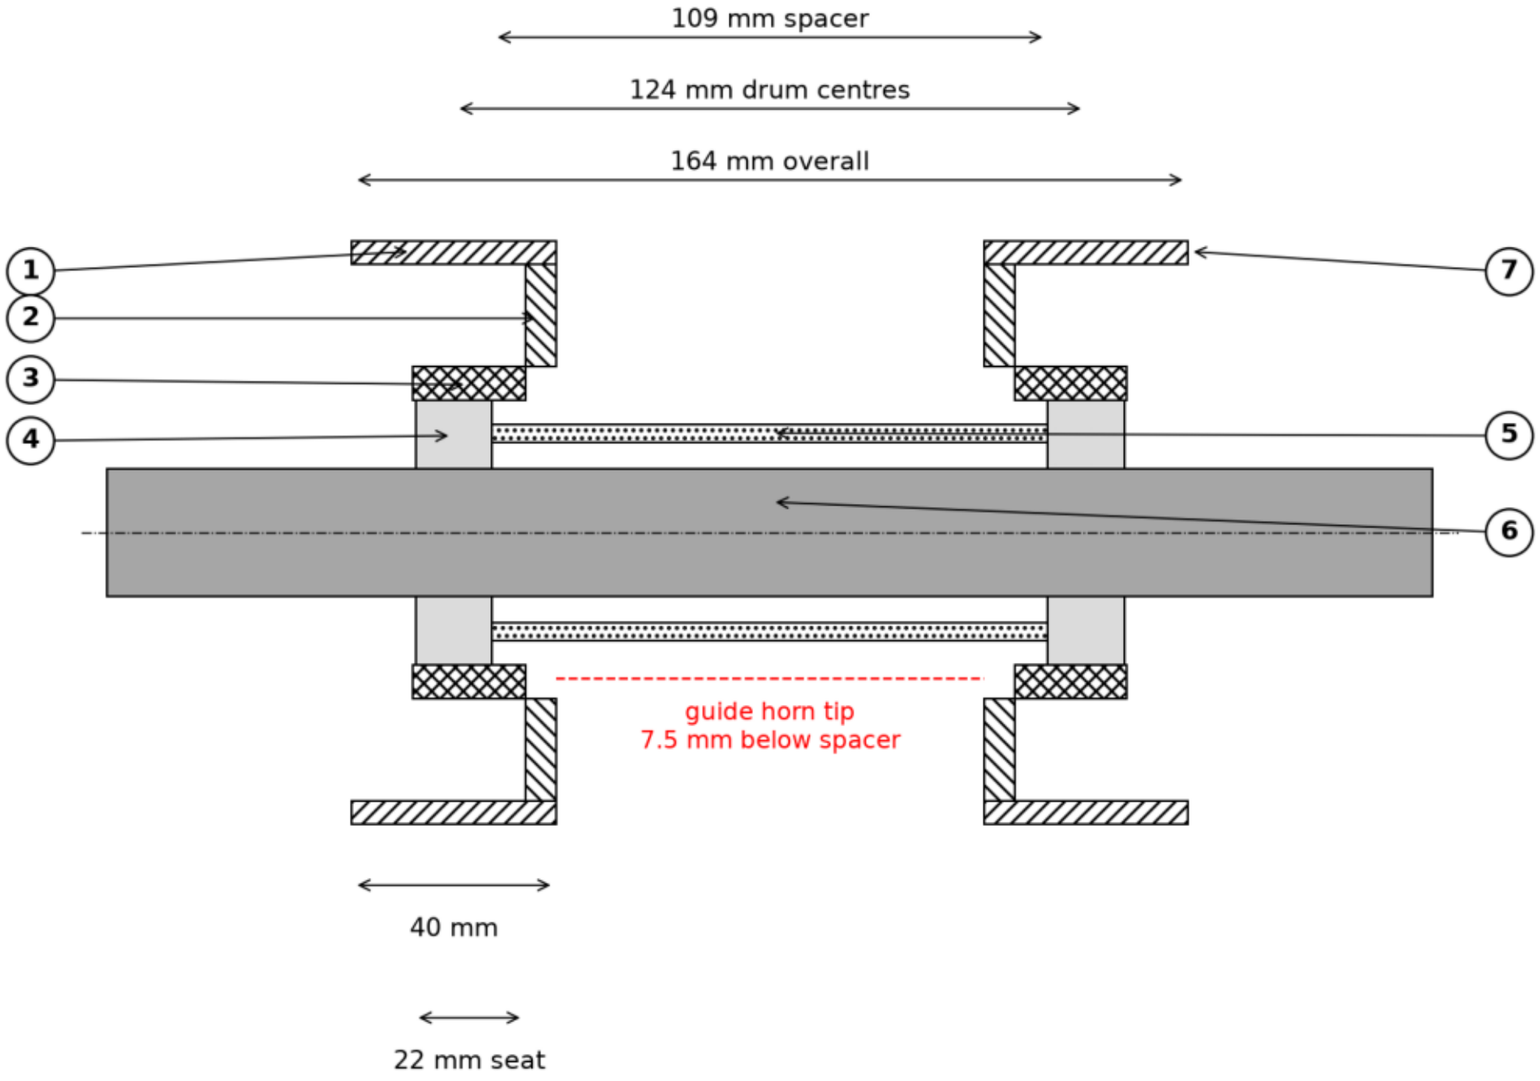

ROLLER

1 PIPE Ø114.3 × 4.5 wall × 40 mm

2 BACKPLATE 6 mm, welded inside pipe

3 BEARING SEAT 65/52 × 22 mm, welded to backplate, 52H7

4 6205-2RS (25 × 52 × 15 mm), press fit

5 SPACER 42.4/35.5 × 109 mm, loose, between bearing inner races

6 SHAFT Ø25 × 260 mm, press fit

7 OPEN OUTER END (cap optional)

Two identical drums at ±62 mm.

NOTES

1. V3 simple spool: 2 identical drums per station at ±62 mm.
2. Pipe + backplate + welded 65/52 × 22 mm seat; 52 H7 after welding.
3. 6205 outer race press in seat; inner race press on Ø25 shaft.
4. Loose 42.4/35.5 × 109 mm spacer between bearing inner races.
5. Central weld omitted; outer end open.
6. Bearing at tread centre; guide horn clearance 7.5 mm.

FLAIL MOWER 500 / UC-V2

ROLLER STATION V3 - SIMPLE SPOOL

DWG No. **UCV2-P-002** REV A

MATERIAL: MS / E250 / EN8

QTY: 12 drums

UNITS: mm

1st ANGLE

SCALE: NTS

SIZE: A3

SHEET: 6 / 15

DATE: 2026-10-29

DRAWN: OC