
IDLER Ø200 × 40 mm — one station, two identical drums

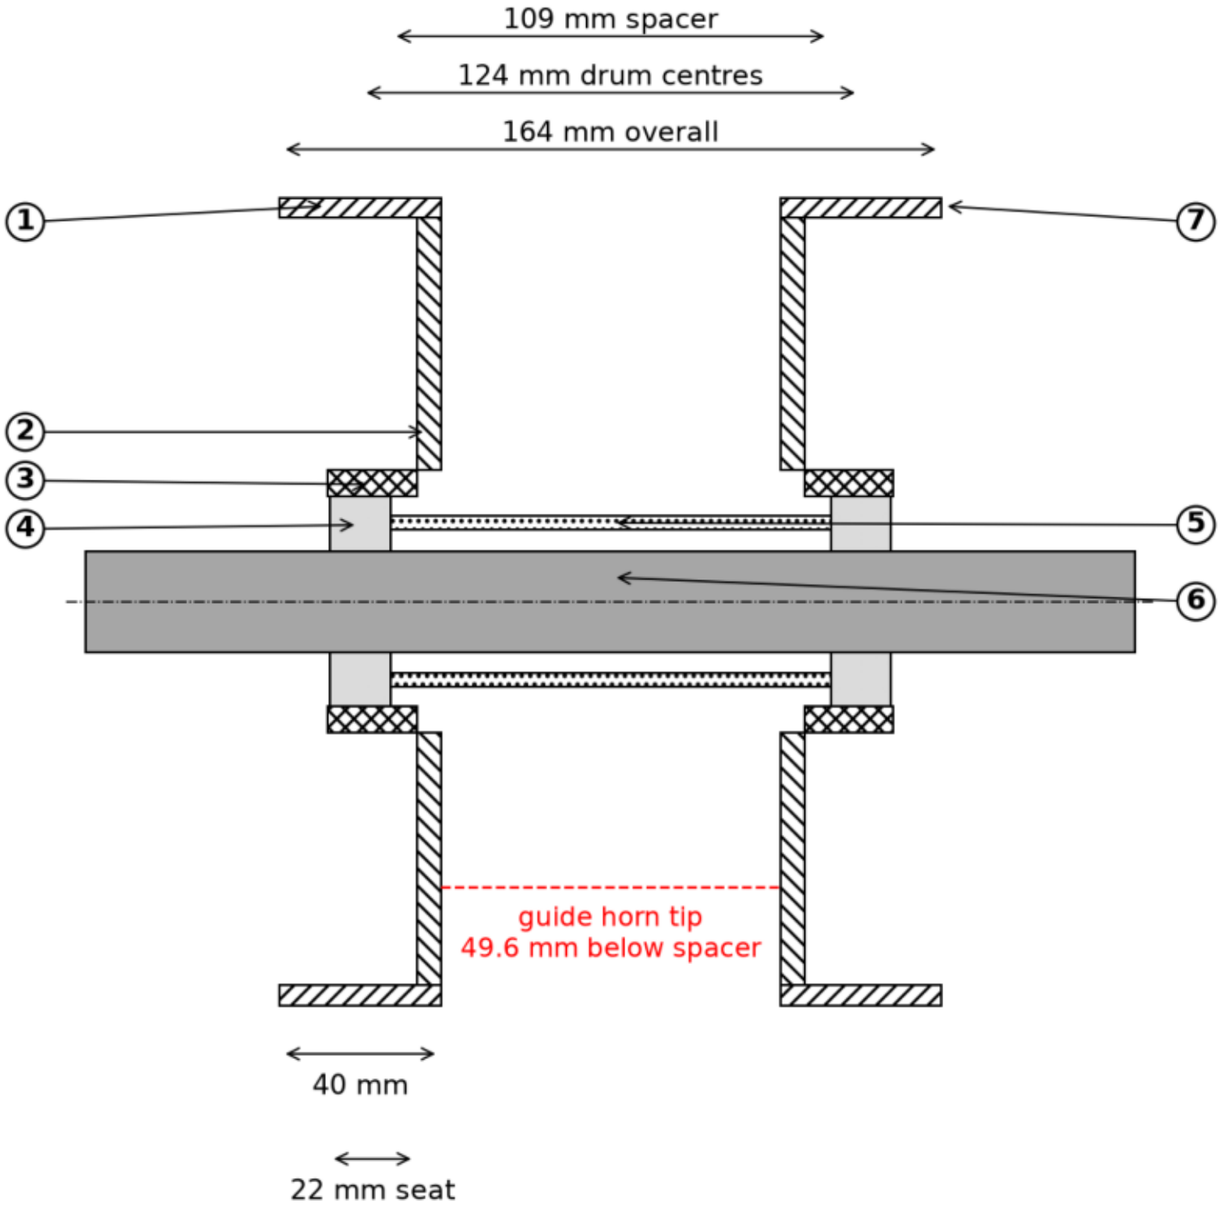

IDLER

1 PIPE Ø200.0 × 5.0 wall × 40 mm

2 BACKPLATE 6 mm, welded inside pipe

3 BEARING SEAT 65/52 × 22 mm, welded to backplate, 52H7

4 6205-2RS (25 × 52 × 15 mm), press fit

5 SPACER 42.4/35.5 × 109 mm, loose, between bearing inner races

6 SHAFT Ø25 × 260 mm, press fit

7 OPEN OUTER END (cap optional)

Two identical drums at ±62 mm.

NOTES

1. V3 simple spool: 2 identical drums per station at ±62 mm.
2. Ø200 × 5 mm pipe + backplate + welded 65/52 × 22 mm seat.
3. 6205 press fits; loose 42.4/35.5 × 109 mm spacer.
4. Central weld omitted; outer end open.
5. Idler pipe bore clears the guide horns by 24.2 mm.
6. Same Ø25 shaft/collars as the roller station.

FLAIL MOWER 500 / UC-V2 **IDLER STATION V3 - SIMPLE SPOOL**			DWG No. **UCV2-P-003** REV A
MATERIAL MS / E250 / EN8	QTY 4 drums		**UNITS: mm** 1st ANGLE
SCALE NTS	SIZE A3	SHEET 7 / 15	DATE 2026-10-29 / DRAWN OC