Ø25 SHAFT (1:2)

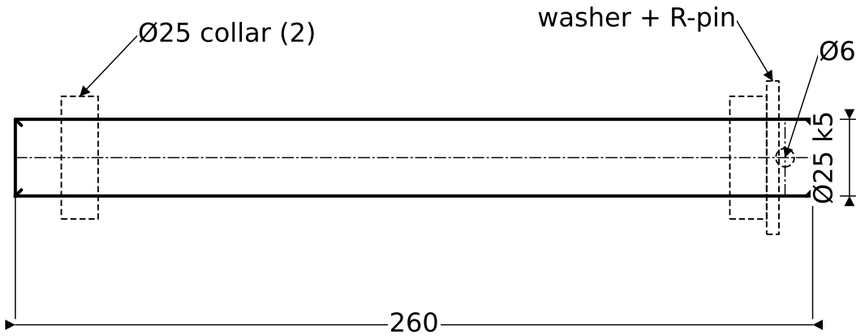

WHERE USED - ROLLER / IDLER SPOOL (context, NTS)

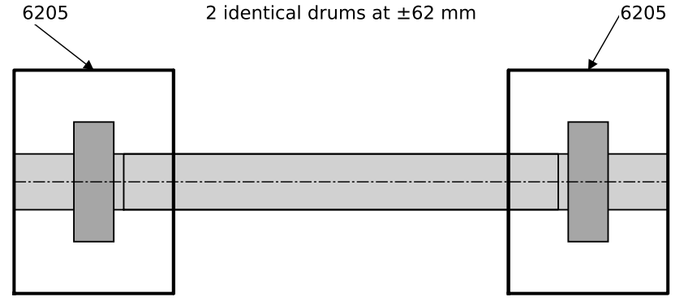

Ø40 AXLE (1:2)

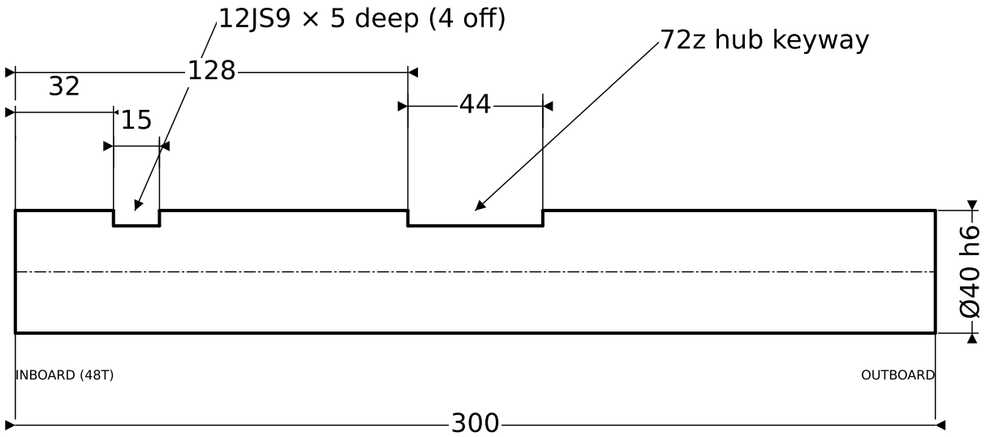

WHERE USED - DRIVE STATION (context, NTS)

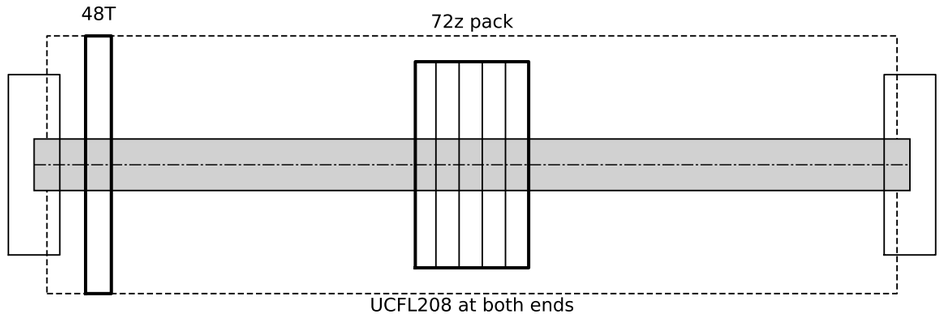

NOTES

1. Ø25: 8 off L260 mm, EN8; seats Ø25 k5, ends g6; Ø6 hole 9 mm O/B.
2. Ø40: 2 off L300 mm, EN8, h6; 4 keyways 12JS9 × 5 deep.
3. Keyways: 32..47 and 128..172 mm from 48T end.
4. Collars/washer/R-pin: COTS, position only.
5. Chamfer 1×45 both ends; protect keyways for paint.

FLAIL MOWER 500 / UC-V2 **SHAFT Ø25 × 260 & AXLE Ø40 × 300**			DWG No. **UCV2-P-004** REV A
MATERIAL EN8 (bright)	QTY 8 + 2		**UNITS: mm** 1st ANGLE
SCALE 1:2	SIZE A3	SHEET 8 / 15	DATE 2026-10-29 / DRAWN OC