DECK PAD (1:1)

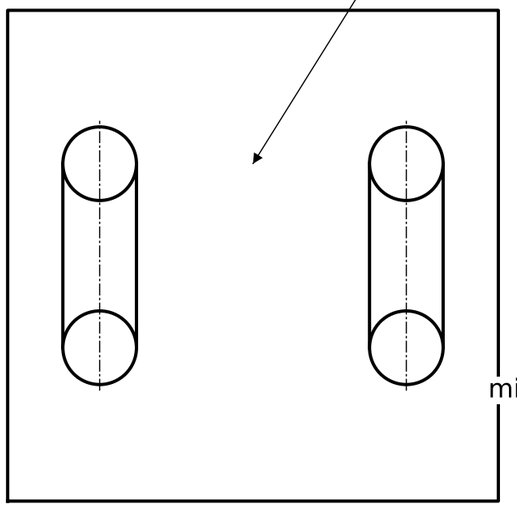

SECTION (1:1)

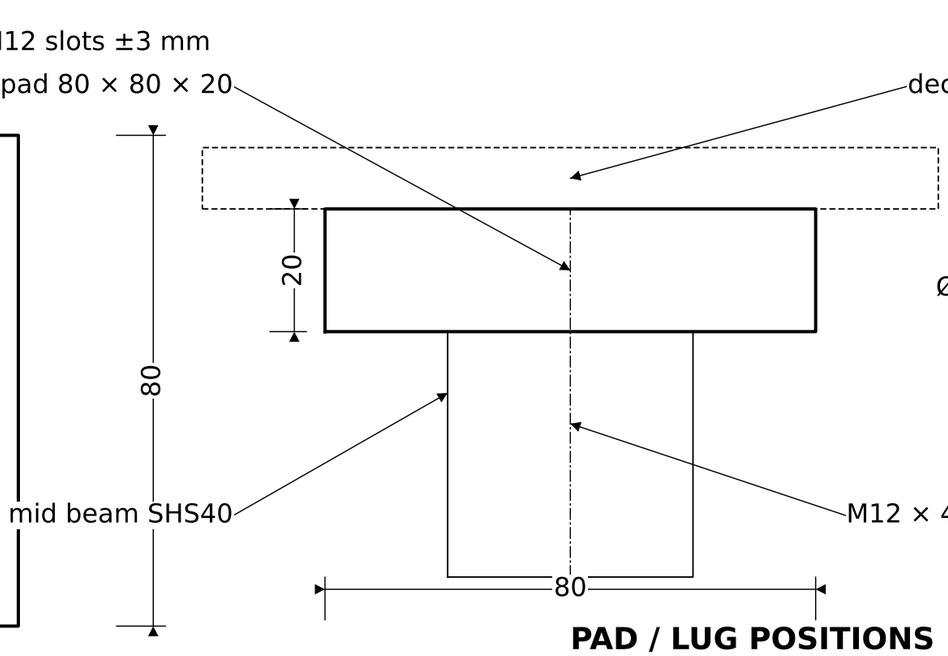

LIFT LUG (1:1)

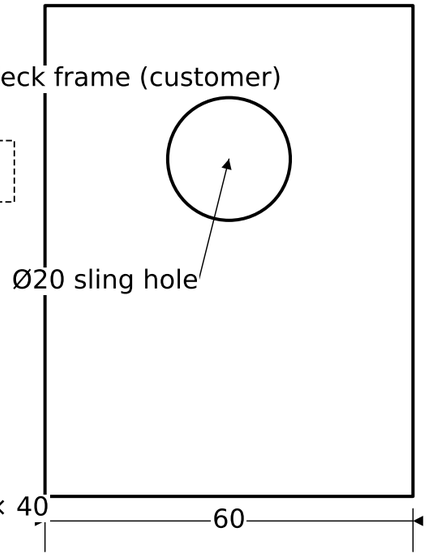

SIDE / TIE

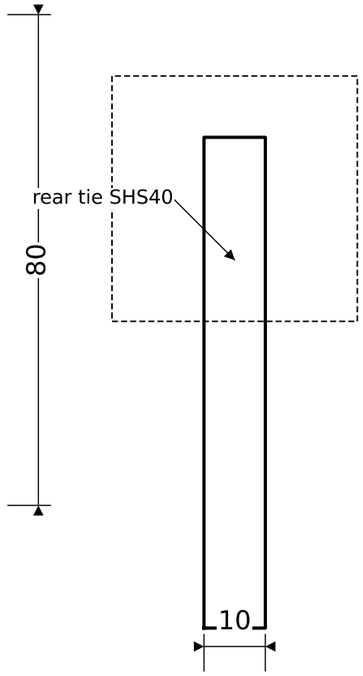

PAD / LUG POSITIONS (1:10)

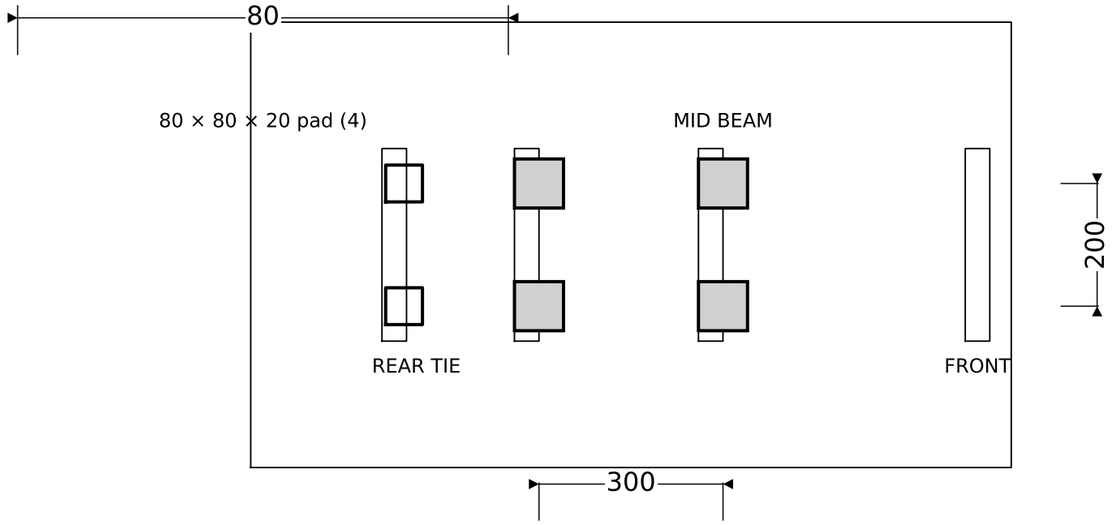

FILLED = DECK PAD (4); OUTLINED = LIFT LUG (2)

DECK PARTS

part	size	mat	qty
deck pad	80 × 80 × 20 mm	E250	4
lift lug	10 × 60 × 80 mm, Ø20	MS	2

NOTES

1. 4× deck pads 80 × 80 × 20 mm on mid beams, top z=175 mm.
2. Pad centres x=±150, y=±100; M12 slot ±3 mm + shim pack.
3. 2× lift lugs under the rear tie, x=-370, y=±100, z130..210 mm.
4. Lug hole Ø20; sling rating to be marked at build.
5. Deck must clear motors (top z=441 mm) and overall 826 mm.
6. FUNCTION: pads carry the deck frame; lugs take a spreader sling.

FLAIL MOWER 500 / UC-V2

DECK INTERFACE & LIFT LUGS

DWG No. **UCV2-P-008** REV A

MATERIAL: E250 / MS

QTY: 4 pads + 2 lugs

UNITS: mm

1st ANGLE

SCALE: 1:1 / 1:10

SIZE: A3

SHEET: 12 / 15

DATE: 2026-10-29

DRAWN: OC