TENSIONER (1:1)

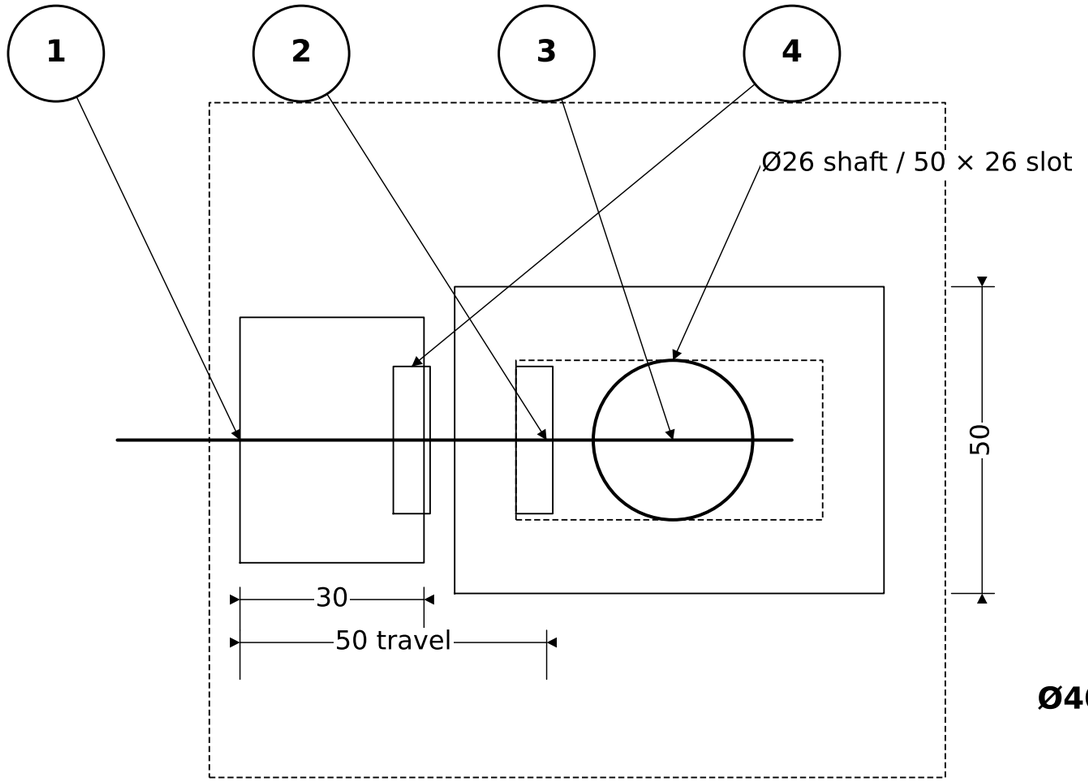

pull to tighten →

FUNCTION: plate dashed; M12 rod pulls eye; 50 mm take-up.

Ø25 COLLAR (1:1)

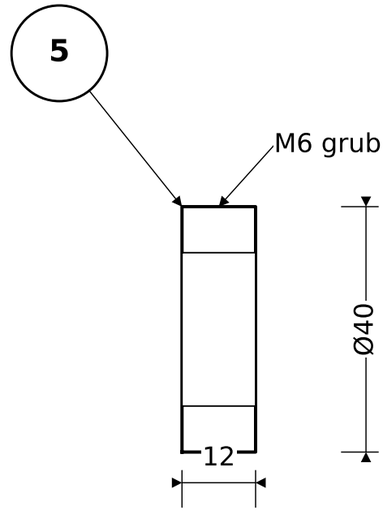

WASHER / PIN (1:1)

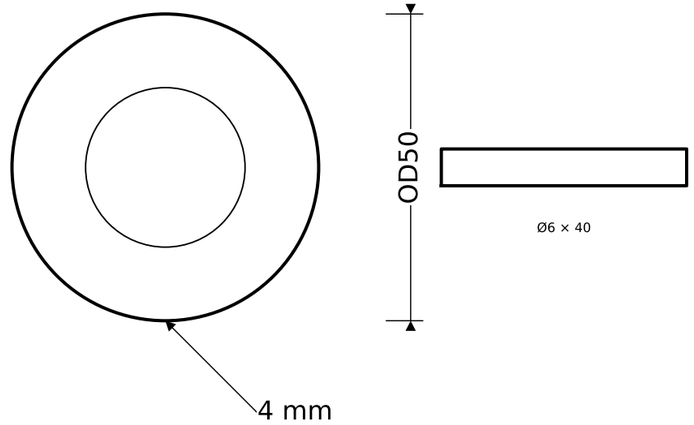

Ø40 COLLAR (1:1)

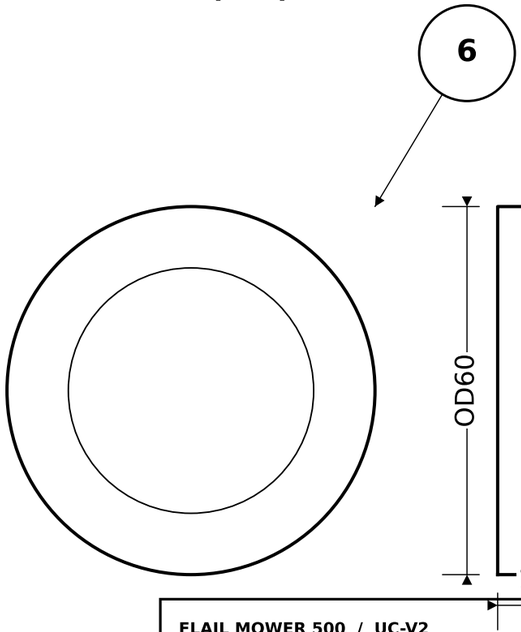

SMALL PARTS

#	part	size mm	mat	qty	where used
1	tension lug	30 × 24 × 40	MS	4	idler slot
2	rod	M12 × 110	EN8	4	tensioner
3	eye	70 × 24 × 50	MS	4	idler shaft
4	nut	M12 (19 A/F)	8.8	8	tensioner, 2/set
5	collar	Ø25 OD40×12	COTS	16	shaft ends
6	collar	Ø40 OD60×12	COTS	4	side axle

NOTES

1. Idler slider travel 50 mm; M12 rod pulls the eye/shaft.
2. Rod M12×110 mm, eye 70×24×50 mm, lug 30×24×40 mm, nut M12 (19 A/F).
3. Set track sag 20 mm mid-span; jam nut after setting.
4. Ø25 collars ×16 (OD40), Ø40 collars ×4 (OD60), washers ×8, pins ×8.

FLAIL MOWER 500 / UC-V2

TENSIONER & SMALL PARTS

DWG No. **UCV2-P-009** REV A

MATERIAL: EN8 / MS

QTY: 4 sets

UNITS: mm

1st ANGLE

SCALE: 1:1

SIZE: A3

SHEET: 13 / 15

DATE: 2026-10-29

DRAWN: OC