TRACK CROSS-SECTION & ROLLER HEIGHTS (SCHEMATIC, 1:2)

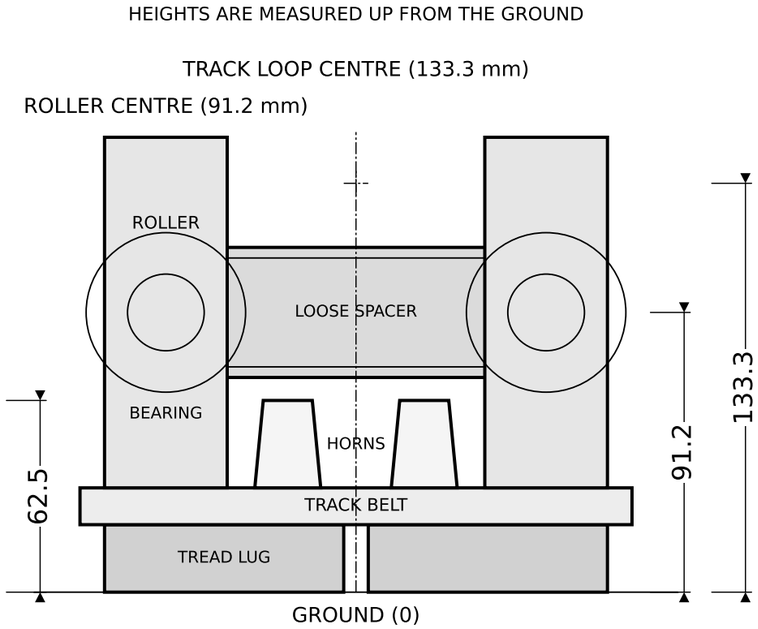

TERMS IN PLAIN LANGUAGE

term	meaning
Ground level	Bottom of the track lugs; all heights start here (0).
Side plate	6 mm vertical side panel; 4 off: inner and outer.
L / R	L = +Y (far side); R = −Y (near side).
Track loop centre	Centre of the oval track path; 133.3 mm above ground.
Roller centre	Centre of a roller drum; 91.2 mm above ground.
Track inner surface	Inside face of the rubber track; rollers run on it; 34 mm above ground.
Guide horns	Two raised ribs inside the track; 66 mm overall, 23 mm gap; top at 62.5 mm.
Drum spacing	Two drums per station, one at ±62 mm from track centre.
Track belt	Rubber band around the wheels; rollers run on its inner face.
Tread lug	Raised rubber block on the outside that grips the ground.
Roller drum	Cylindrical roller that supports the track; two per station.
Drum backplate	6 mm disc welded inside the inner end of each drum.
Bearing	6205-2RS (25 × 52 × 15 mm), one per drum; runs on Ø25 shaft.
Bearing seat	Welded ring that holds the bearing; 65/52 × 22 mm.
Press fit	Bearing is pressed in; no adhesive.
Loose spacer	Tube between the two bearings; 42.4/35.5 × 109 mm.
Open end	Outer end of the drum is open; plastic cap optional.
Unless noted	All dimensions in mm; 1st-angle projection.

NOTES

1. All dimensions in millimetres; 1st-angle projection.
2. Ground is the bottom of the track lugs; heights go up from there.
3. The guide horns are the two raised centre ribs inside the track.
4. Bearing seat and shaft are precision-fitted.
5. Bearings are press-fitted; no adhesive.

FLAIL MOWER 500 / UC-V2

DEFINITIONS & STANDARD NOTES

DWG No.
UCV2-P-011
REV A

MATERIAL: -
QTY: -

UNITS: mm
1st ANGLE

SCALE: 1:2
SIZE: A3
SHEET: 15 / 15
DATE: 2026-10-29
DRAWN: OC