
UC-V2 — ISOMETRIC VIEW (NTS, SIMPLIFIED GA)

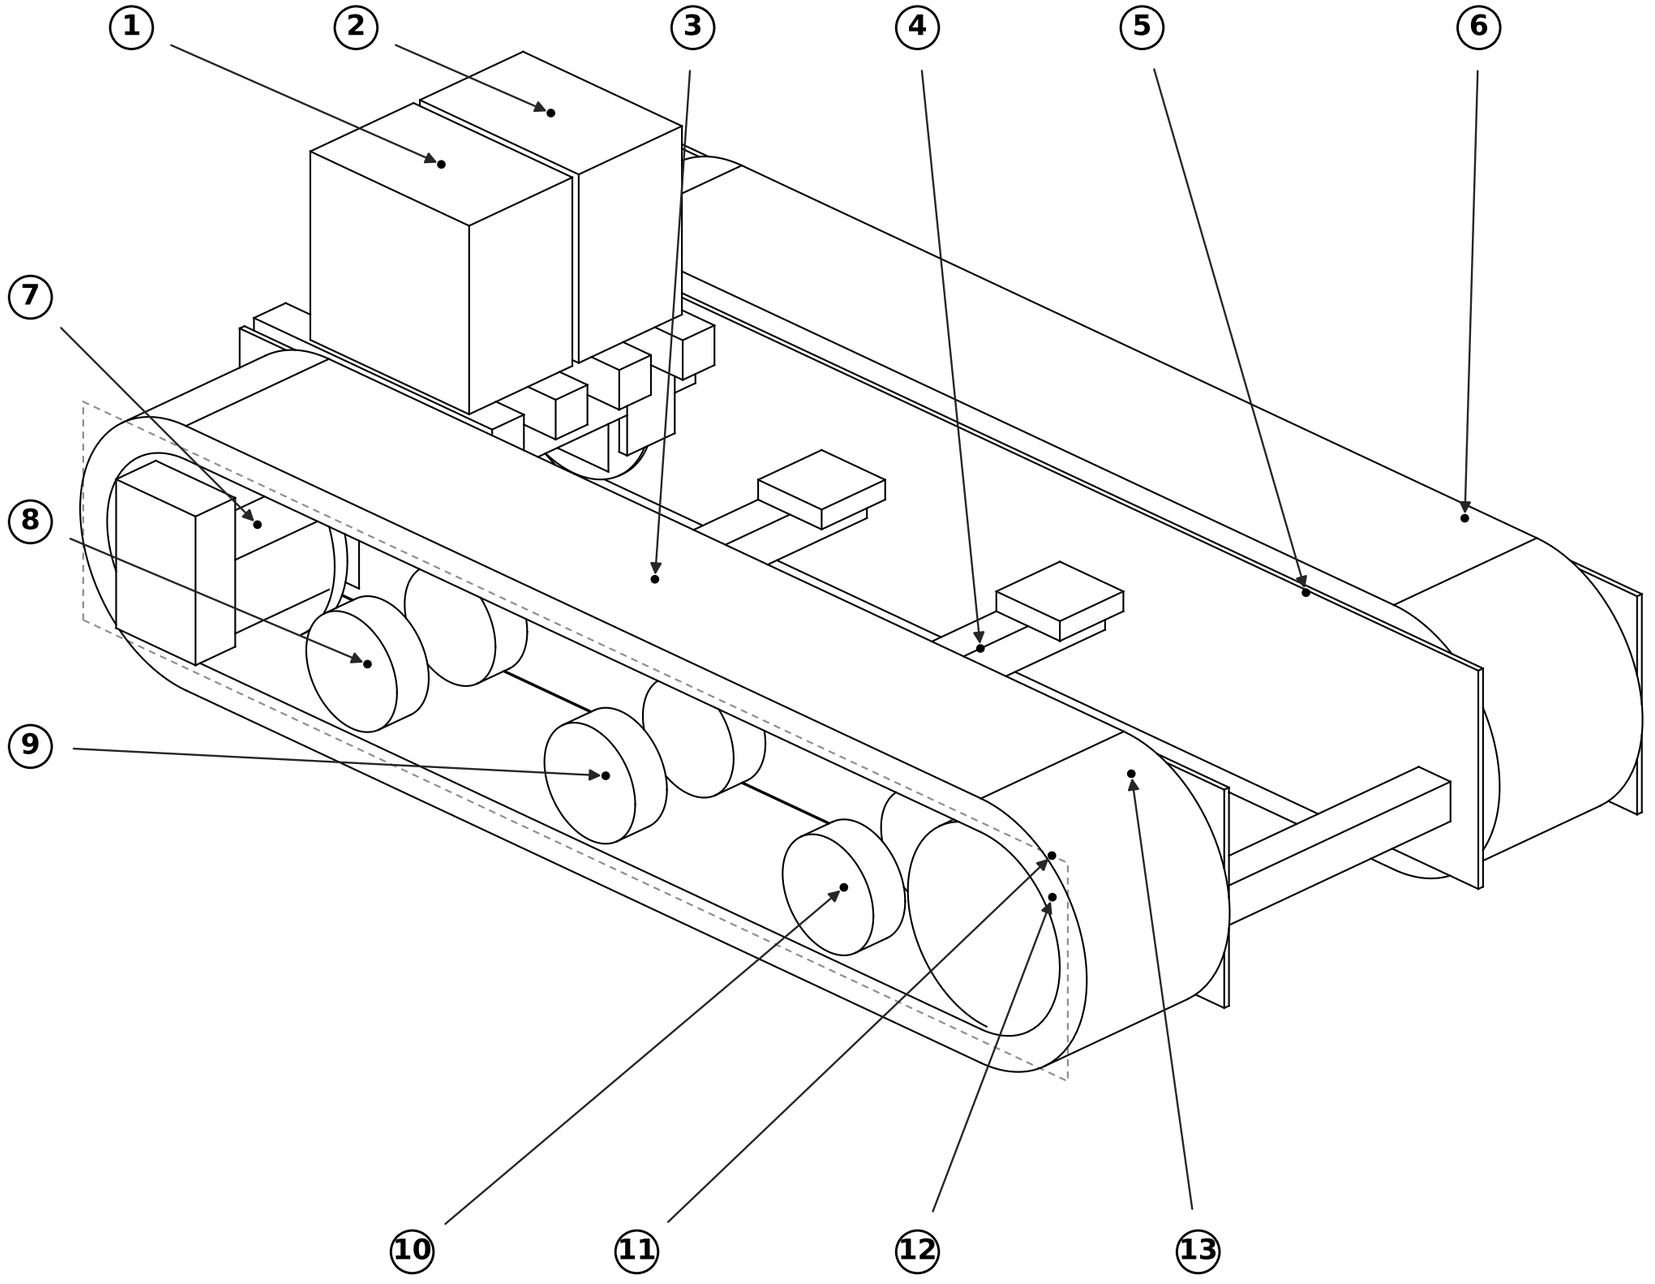

Near track shown; the far track is behind the far inner side plate — see GA-005 for both tracks.
Visible edges only; dimensions mm; FRONT = +X (right).

LEGEND


1. R MOTOR
2. L MOTOR
3. TRACK — 180 × 72 × 37
4. MAIN FRAME
5. L INNER SIDE PLATE (Y+)
6. L OUTER SIDE PLATE (Y+)
7. TRACK SPROCKET 72z9
8. ROLLER STATION 1
9. ROLLER STATION 2
10. ROLLER STATION 3
11. R OUTER SIDE PLATE (Y-) - dotted
12. IDLER STATION
13. R INNER SIDE PLATE (Y-)

L = +Y (far side); R = −Y (near side).

R outer side plate removed - dotted outline.

Simplified GA; not for manufacture.

SIDE ELEVATION (1:5)

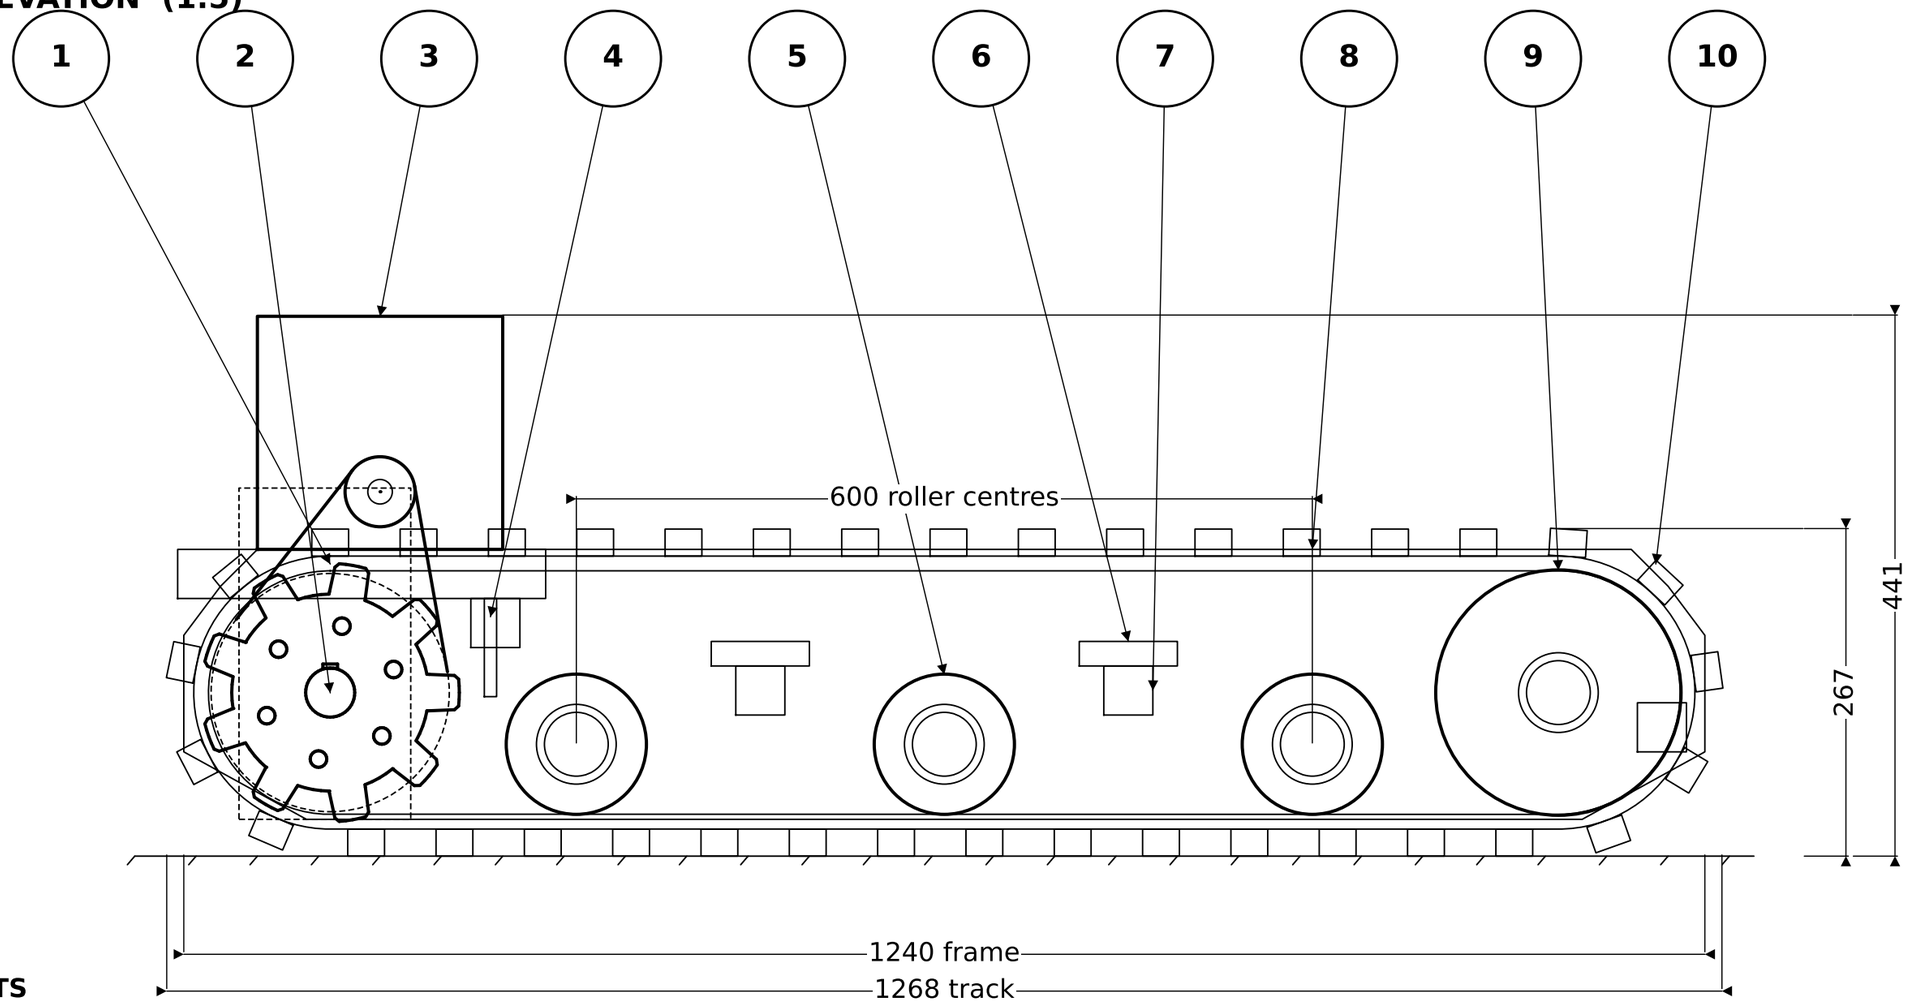

CALL-OUTS

1	SPROCKET 72z9	**6**	DECK PAD 80 × 80
2	AXLE Ø40	**7**	BEAM SHS40
3	MOTOR 1.2 kW	**8**	SIDE PLATE 6 mm
4	LIFT LUG	**9**	IDLER Ø200
5	ROLLER Ø114.3 (3)	**10**	TRACK 180 × 72 × 37

NOTES

1. Near side plate removed for clarity; running gear shown true.
2. Datum: ground at lug tips z=0, X travel, Z up. Dimensions mm.
3. Track loop: 37 links × 72 pitch, R105.26, C1001.3 (closure 0).
4. Chain plane y=±140; 48T/14T 428, 60 links, C=168.66 mm.
5. Overall W826 over UCFL208 flanges; side-plate span 726; track span 700.
6. Motor body y 4..134 (inboard); chain runs at y=140, outboard of motor.
7. Loop centre z=133.3; roller centre z=91.2. Call-outs 1-10 at left.

FLAIL MOWER 500 / UC-V2


GENERAL ARRANGEMENT - SIDE ELEVATION

DWG No.
UCV2-GA-001
REV A

MATERIAL	QTY	UNITS
-	1	**mm**
		1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
1:5	A3	1 / 15	2026-10-29	OC

TRACK CROSS-SECTION & ROLLER HEIGHTS (SCHEMATIC, 1:2)

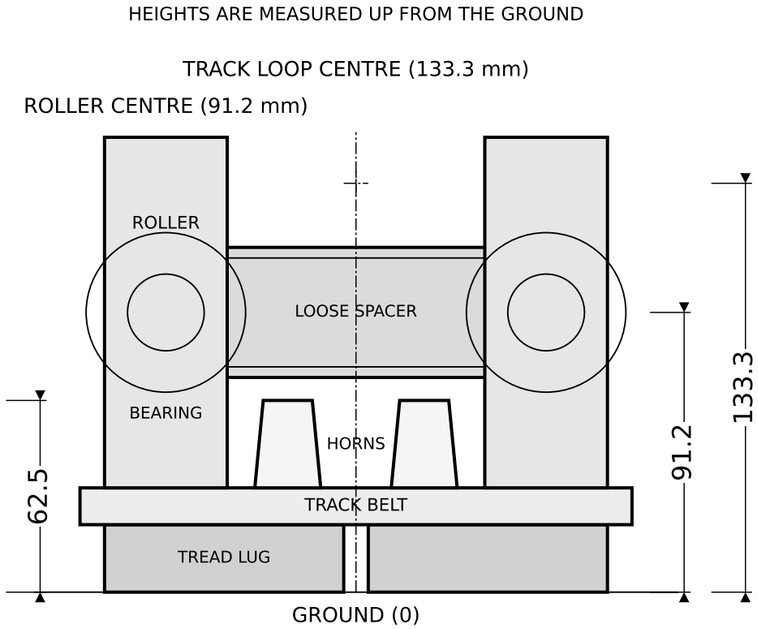

TERMS IN PLAIN LANGUAGE

term	meaning
Ground level	Bottom of the track lugs; all heights start here (0).
Side plate	6 mm vertical side panel; 4 off: inner and outer.
L / R	L = +Y (far side); R = −Y (near side).
Track loop centre	Centre of the oval track path; 133.3 mm above ground.
Roller centre	Centre of a roller drum; 91.2 mm above ground.
Track inner surface	Inside face of the rubber track; rollers run on it; 34 mm above ground.
Guide horns	Two raised ribs inside the track; 66 mm overall, 23 mm gap; top at 62.5 mm.
Drum spacing	Two drums per station, one at ±62 mm from track centre.
Track belt	Rubber band around the wheels; rollers run on its inner face.
Tread lug	Raised rubber block on the outside that grips the ground.
Roller drum	Cylindrical roller that supports the track; two per station.
Drum backplate	6 mm disc welded inside the inner end of each drum.
Bearing	6205-2RS (25 × 52 × 15 mm), one per drum; runs on Ø25 shaft.
Bearing seat	Welded ring that holds the bearing; 65/52 × 22 mm.
Press fit	Bearing is pressed in; no adhesive.
Loose spacer	Tube between the two bearings; 42.4/35.5 × 109 mm.
Open end	Outer end of the drum is open; plastic cap optional.
Unless noted	All dimensions in mm; 1st-angle projection.

NOTES

1. All dimensions in millimetres; 1st-angle projection.
2. Ground is the bottom of the track lugs; heights go up from there.
3. The guide horns are the two raised centre ribs inside the track.
4. Bearing seat and shaft are precision-fitted.
5. Bearings are press-fitted; no adhesive.

FLAIL MOWER 500 / UC-V2

DEFINITIONS & STANDARD NOTES


DWG No.
UCV2-P-011
REV A

MATERIAL: -
QTY: -


UNITS: mm
1st ANGLE

SCALE: 1:2
SIZE: A3
SHEET: 15 / 15
DATE: 2026-10-29
DRAWN: OC

PLAN (1:7)

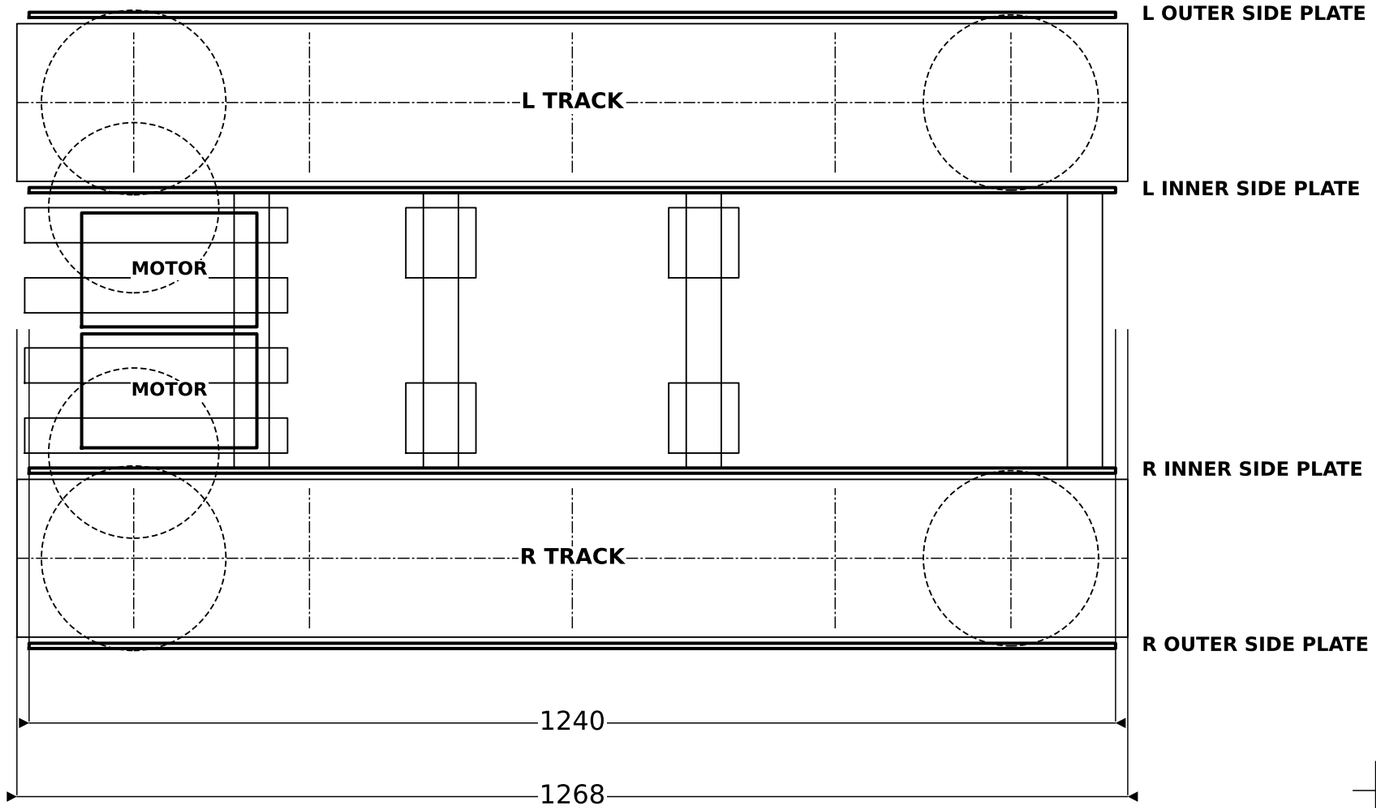

END VIEW (1:7)

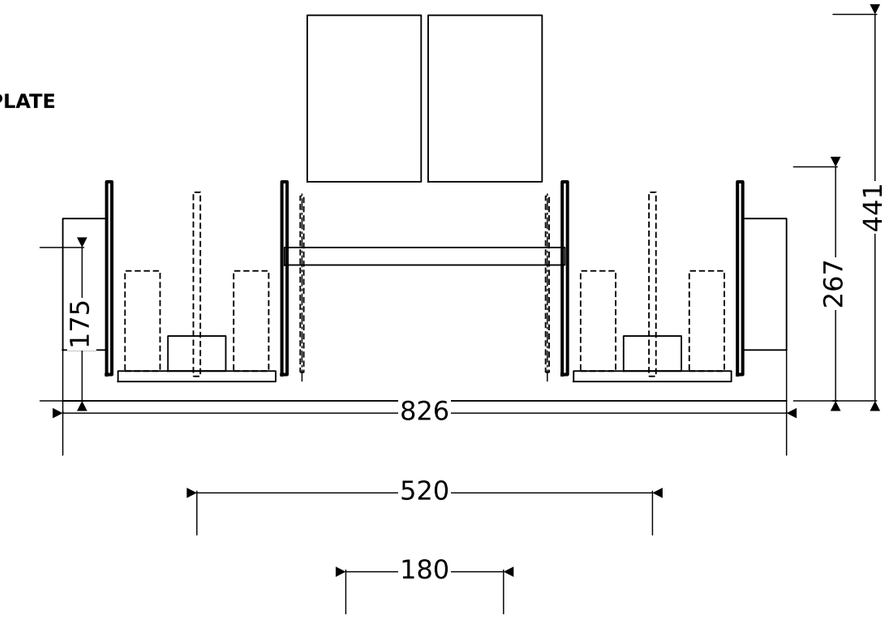


NOTES

1. Track centres 520; side-plate gauge 200; overall 826 over UCFL.
2. Deck pads: x=±150, y=±100 mm; top z=175 mm (4× M12).
3. Motors: 2× 1.2 kW on rails z250..441; pinions y=±140.
4. Lift lugs: x=-370, y=±100.
5. Tracks y=±260, 180 wide; inner side plates y=±160; outer y=±360.
6. L=+Y (far side), R=-Y (near side); four side-plate lines in end view.

FLAIL MOWER 500 / UC-V2 **GENERAL ARRANGEMENT - PLAN & END VIEW**			DWG No. **UCV2-GA-002** REV A
MATERIAL -	QTY 1		**UNITS: mm** 1st ANGLE
SCALE 1:7	SIZE A3	SHEET 2 / 15	DATE 2026-10-29 / DRAWN OC

TOP VIEW (1:6)

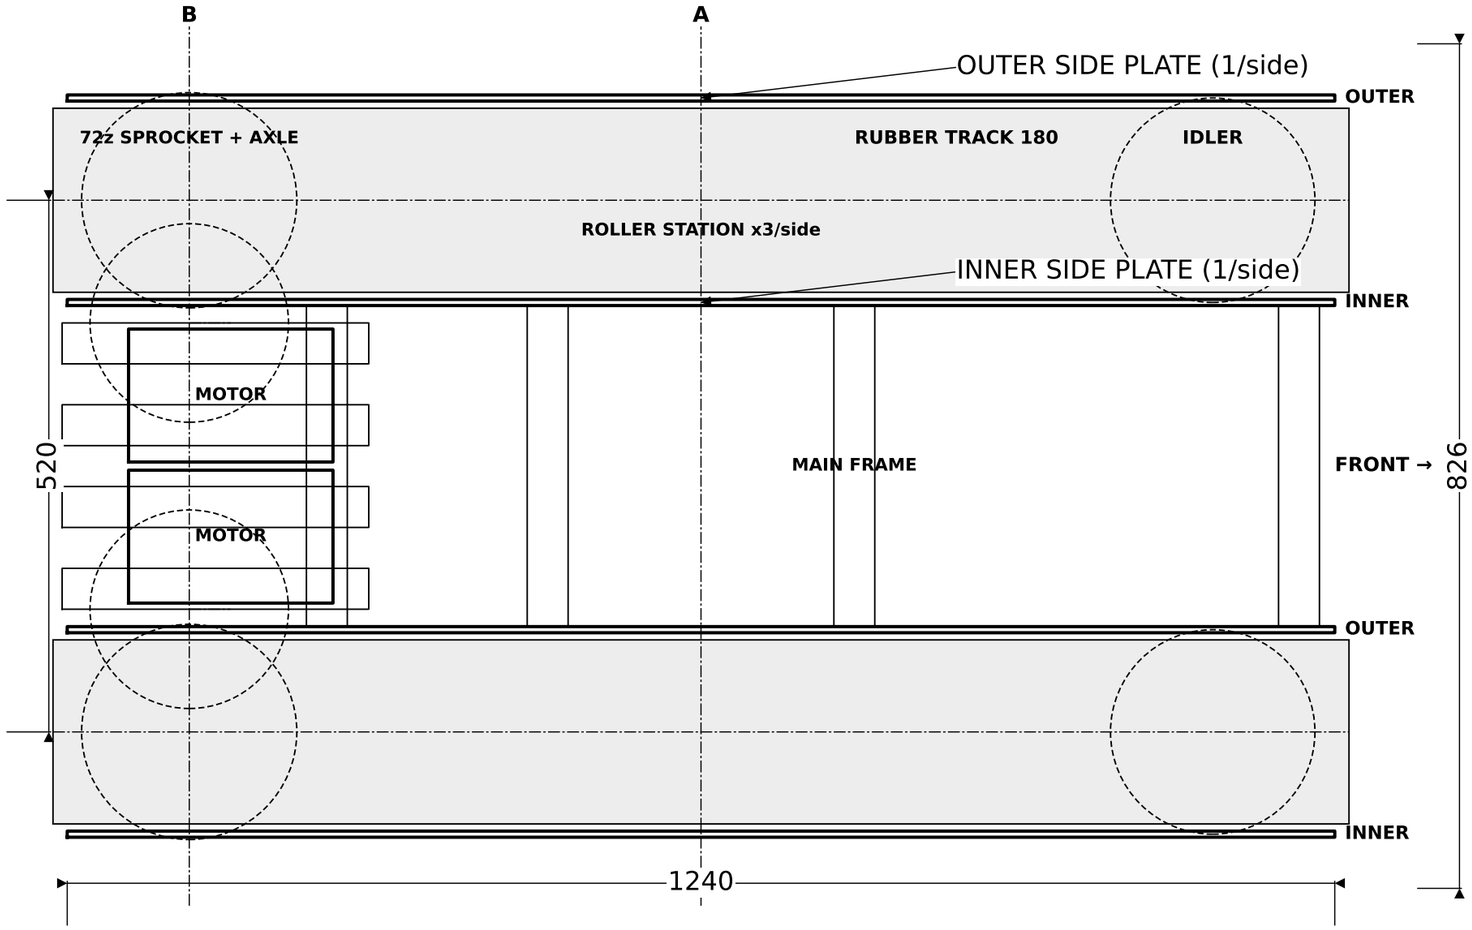

NOTES

1. Top view; both side plates per side. L=+Y (top), R=-Y (bottom).
2. Inner side plates at y=±160; outer at y=±360 (6 mm).
3. Track centres 520; side-plate gauge 200; overall 826 over UCFL.
4. Section A-A at x=0 (roller station); B-B at x=-500.6 (drive).
5. Direct labels; running gear sits between the side-plate pairs.

FLAIL MOWER 500 / UC-V2


TOP VIEW - BOTH SIDE PLATES

DWG No.
UCV2-GA-005
REV A

MATERIAL	QTY	UNITS: mm
-	1	1st ANGLE

SCALE	SIZE	SHEET	DATE	DRAWN
1:6	A3	4 / 15	2026-10-29	OC

SECTION B-B (1:1.5)

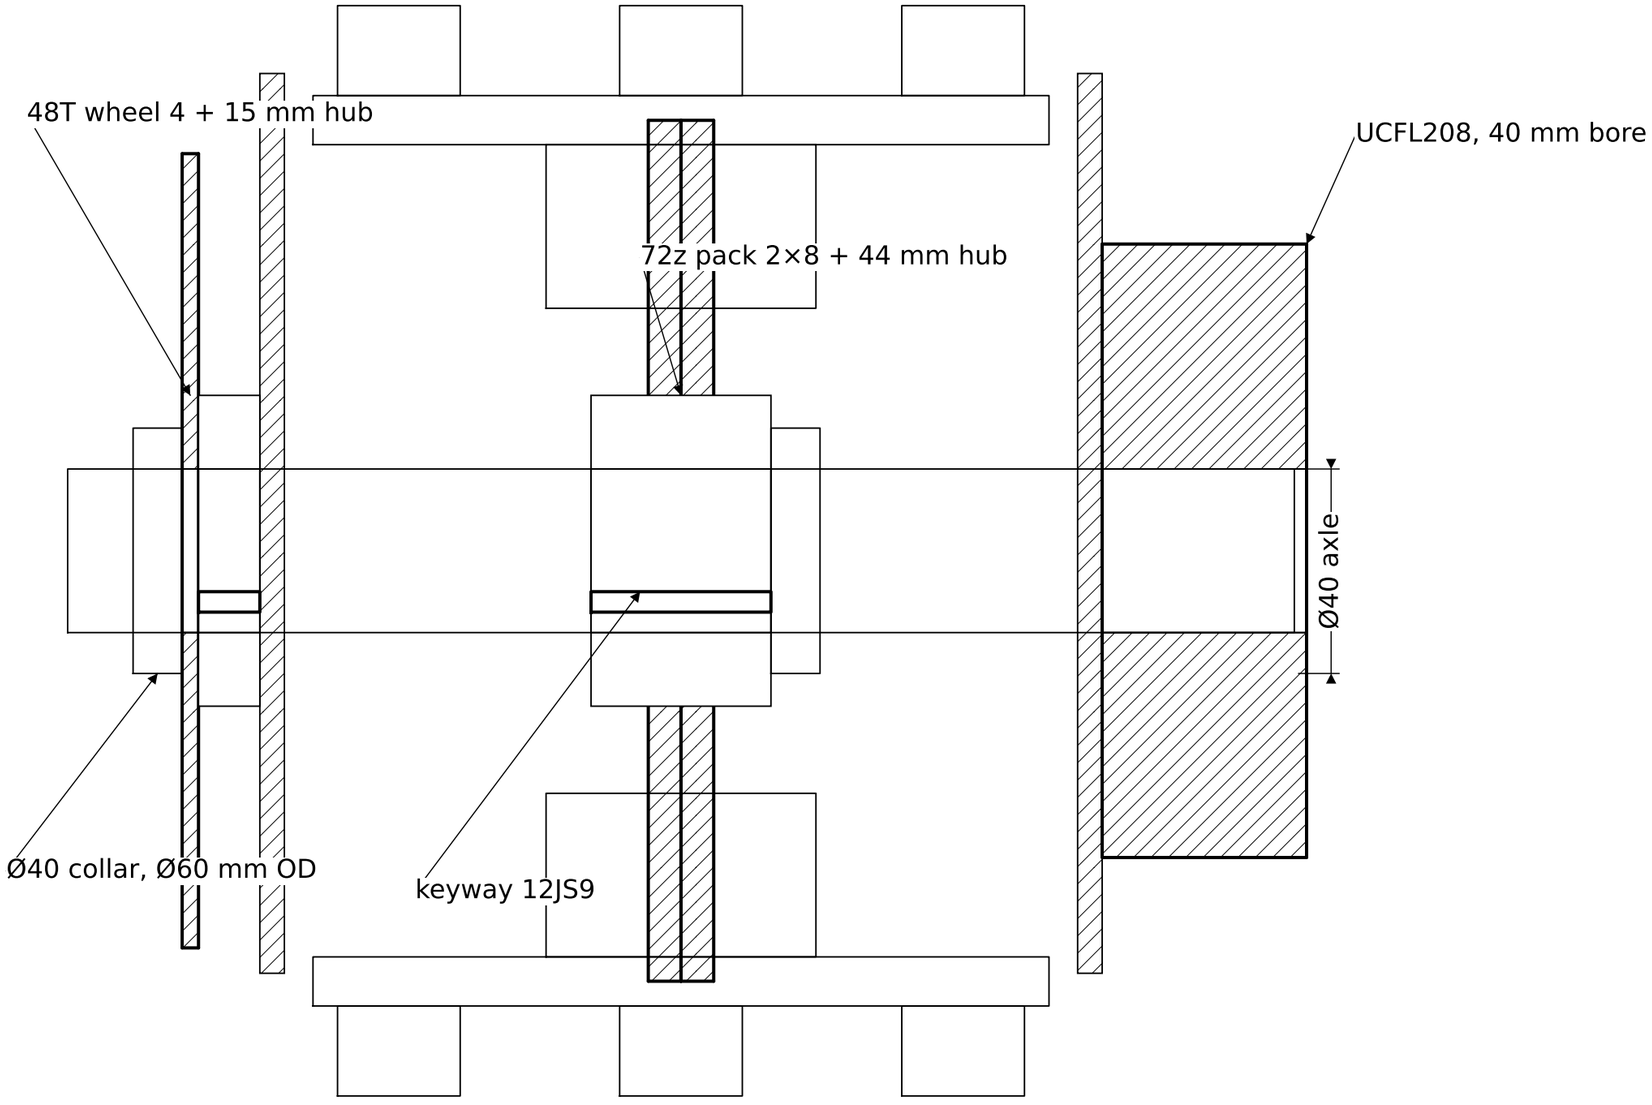

NOTES

1. Section at x=-500.6, looking forward. Local y=0 at track centre.
2. 48T y=-120 (global 140); 72z y=0 (global 260); axle z=133.3.
3. Axle Ø40 L300: keyways y=142..157 and 238..282.
4. UCFL208 363..413; axle end 410 -> 47 mm engagement.
5. Ø40 collars (OD60) trap the 48T wheel and the 72z hub.
6. Chain plane y=140 (global), 120 inboard of track centre.

FLAIL MOWER 500 / UC-V2 **SECTION B-B - DRIVE STATION**			DWG No. **UCV2-GA-004** REV A
MATERIAL EN8 / IS2062	QTY 1 station		**UNITS: mm** 1st ANGLE
SCALE 1:1.5	SIZE A3	SHEET 3 / 15	DATE 2026-10-29 / DRAWN OC