SECTION (1:1.5)

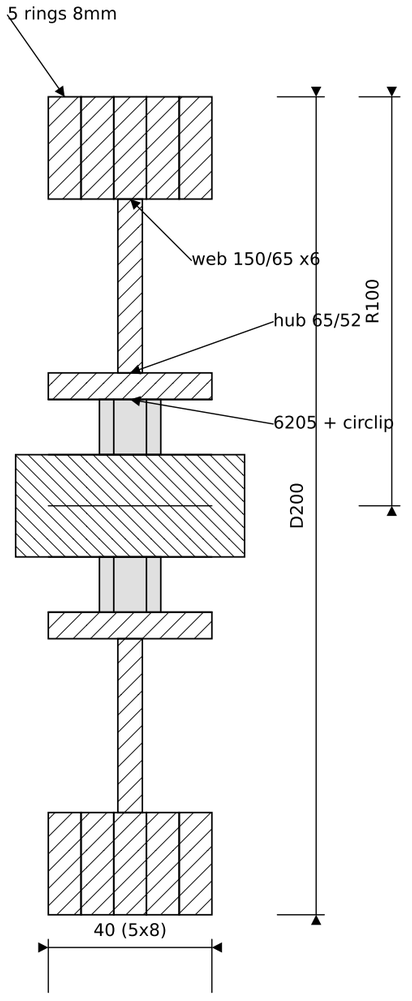

END VIEW (1:1.5)

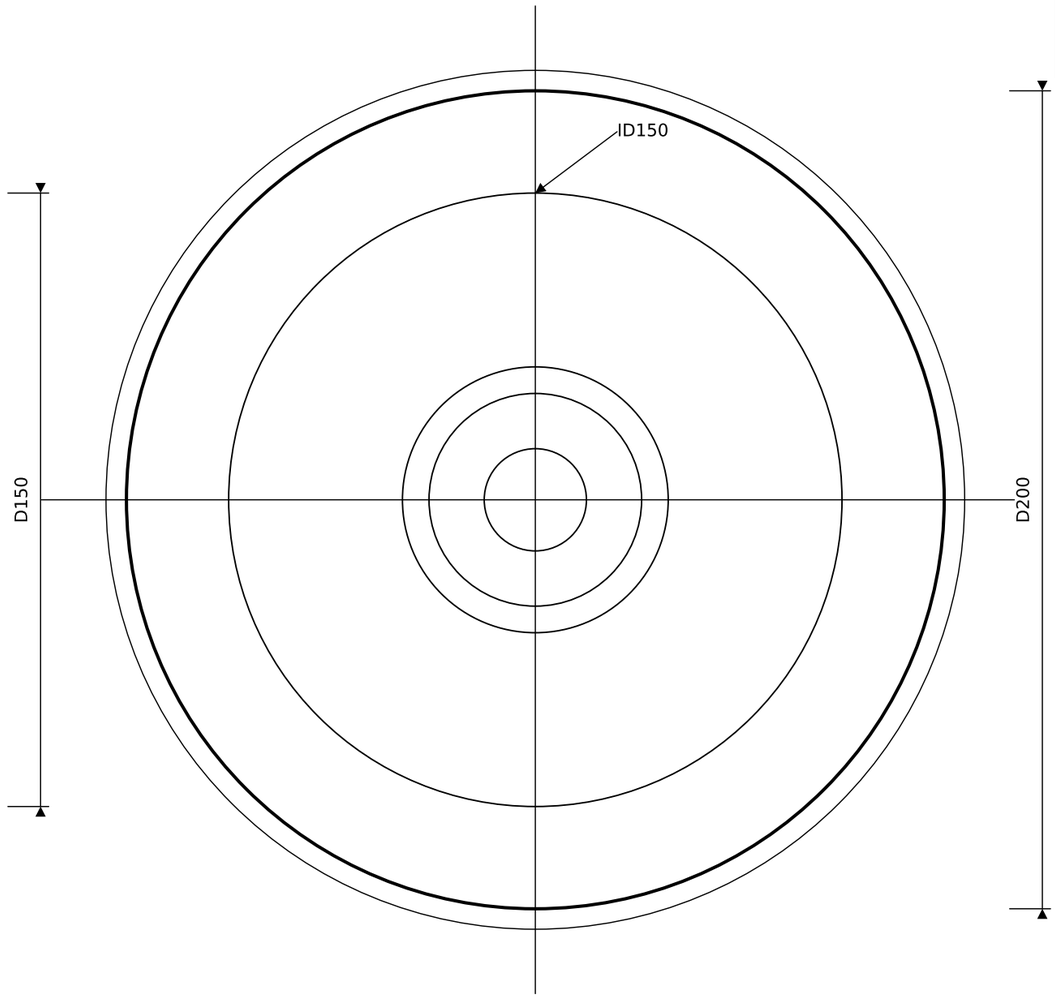

DISC PARTS

#	part	mat	qty	kg
1	ring OD200/ID150x8	E250	5	0.86
2	web OD150/ID65x6	E250	1	0.68
3	hub ring OD65/ID52x8	E250	5	0.08
4	6205-2RS	COTS	1	0.13
5	circlip 52x1.5	COTS	1	-

NOTES

1. 5 laser rings OD200/ID150x8 = 40 wide tread, welded stack.
2. Web OD150/ID65x6 sits INSIDE the bore at mid-width (audit fix 2026-10-29).
3. Web is STRUCTURAL: connects tread to hub; weld both sides.
4. Hub: 5 rings OD65/ID52x8 = 40, Loctite 638.
5. 1x 6205-2RS press + circlip; no skim (flap-disc max 1mm).
6. Idler runs on belt inner R99.26; 0.7mm radial preload accepted.

FLAIL MOWER 500 / UC-V2

IDLER DISC D200 - ASSEMBLY

DWG No.
UCV2-P-003
REV A

MATERIAL: E250 + EN8

QTY / MASS: 4 / 5.37 + brg

SCALE: 1:1.5

SIZE: A3

SHEET: 7 / 14

DATE: 2026-10-29

DRAWN: OC