


DCS — System Interconnect Schematic

Raspberry Pi · ADS1115 · Rosemount 4–20 mA Temperature Transmitter

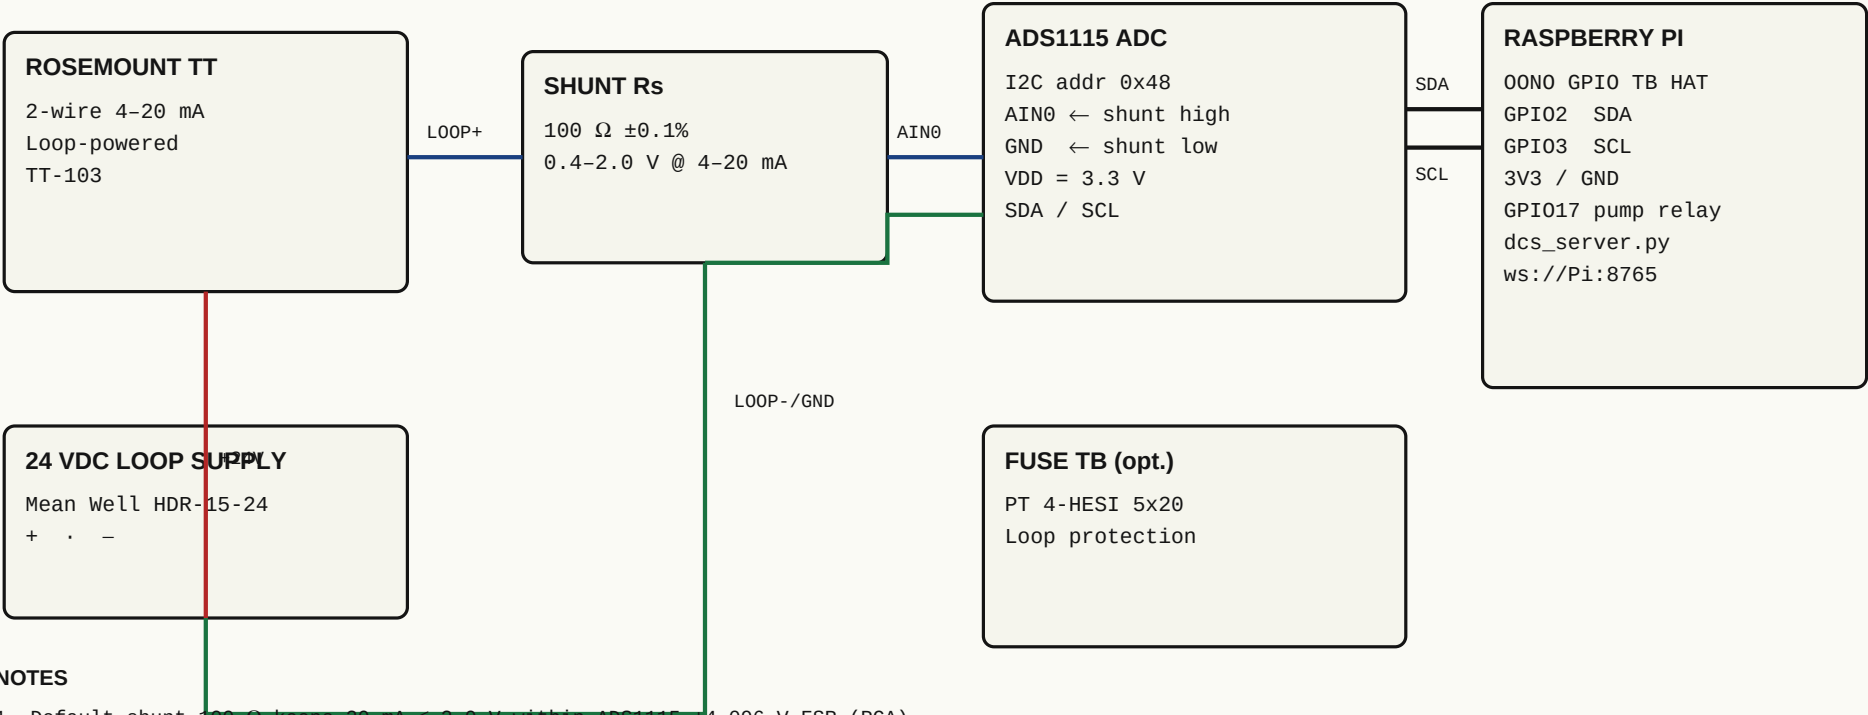

NOTES

- 1. Default shunt 100 Ω keeps 20 mA ≤ 2.0 V within ADS1115 ±4.096 V FSR (PGA).
- 2. Enable I2C on the Pi (raspi-config). Confirm 0x48 with i2cdetect -y 1.
- 3. Desktop app connects over LAN WebSocket; Pi prints the same readout to the terminal.
- 4. Breadboard or soldered/flex proto PCB – same netlist. 00NO GPIO terminal HAT for field wiring.
- 5. Star 24 V return with ADC/Pi GND at shunt low. Prefer isolated loop supply (HDR-15-24).
- 6. Open this PDF for the authoritative drawing (GitHub does not inline PDF images).
