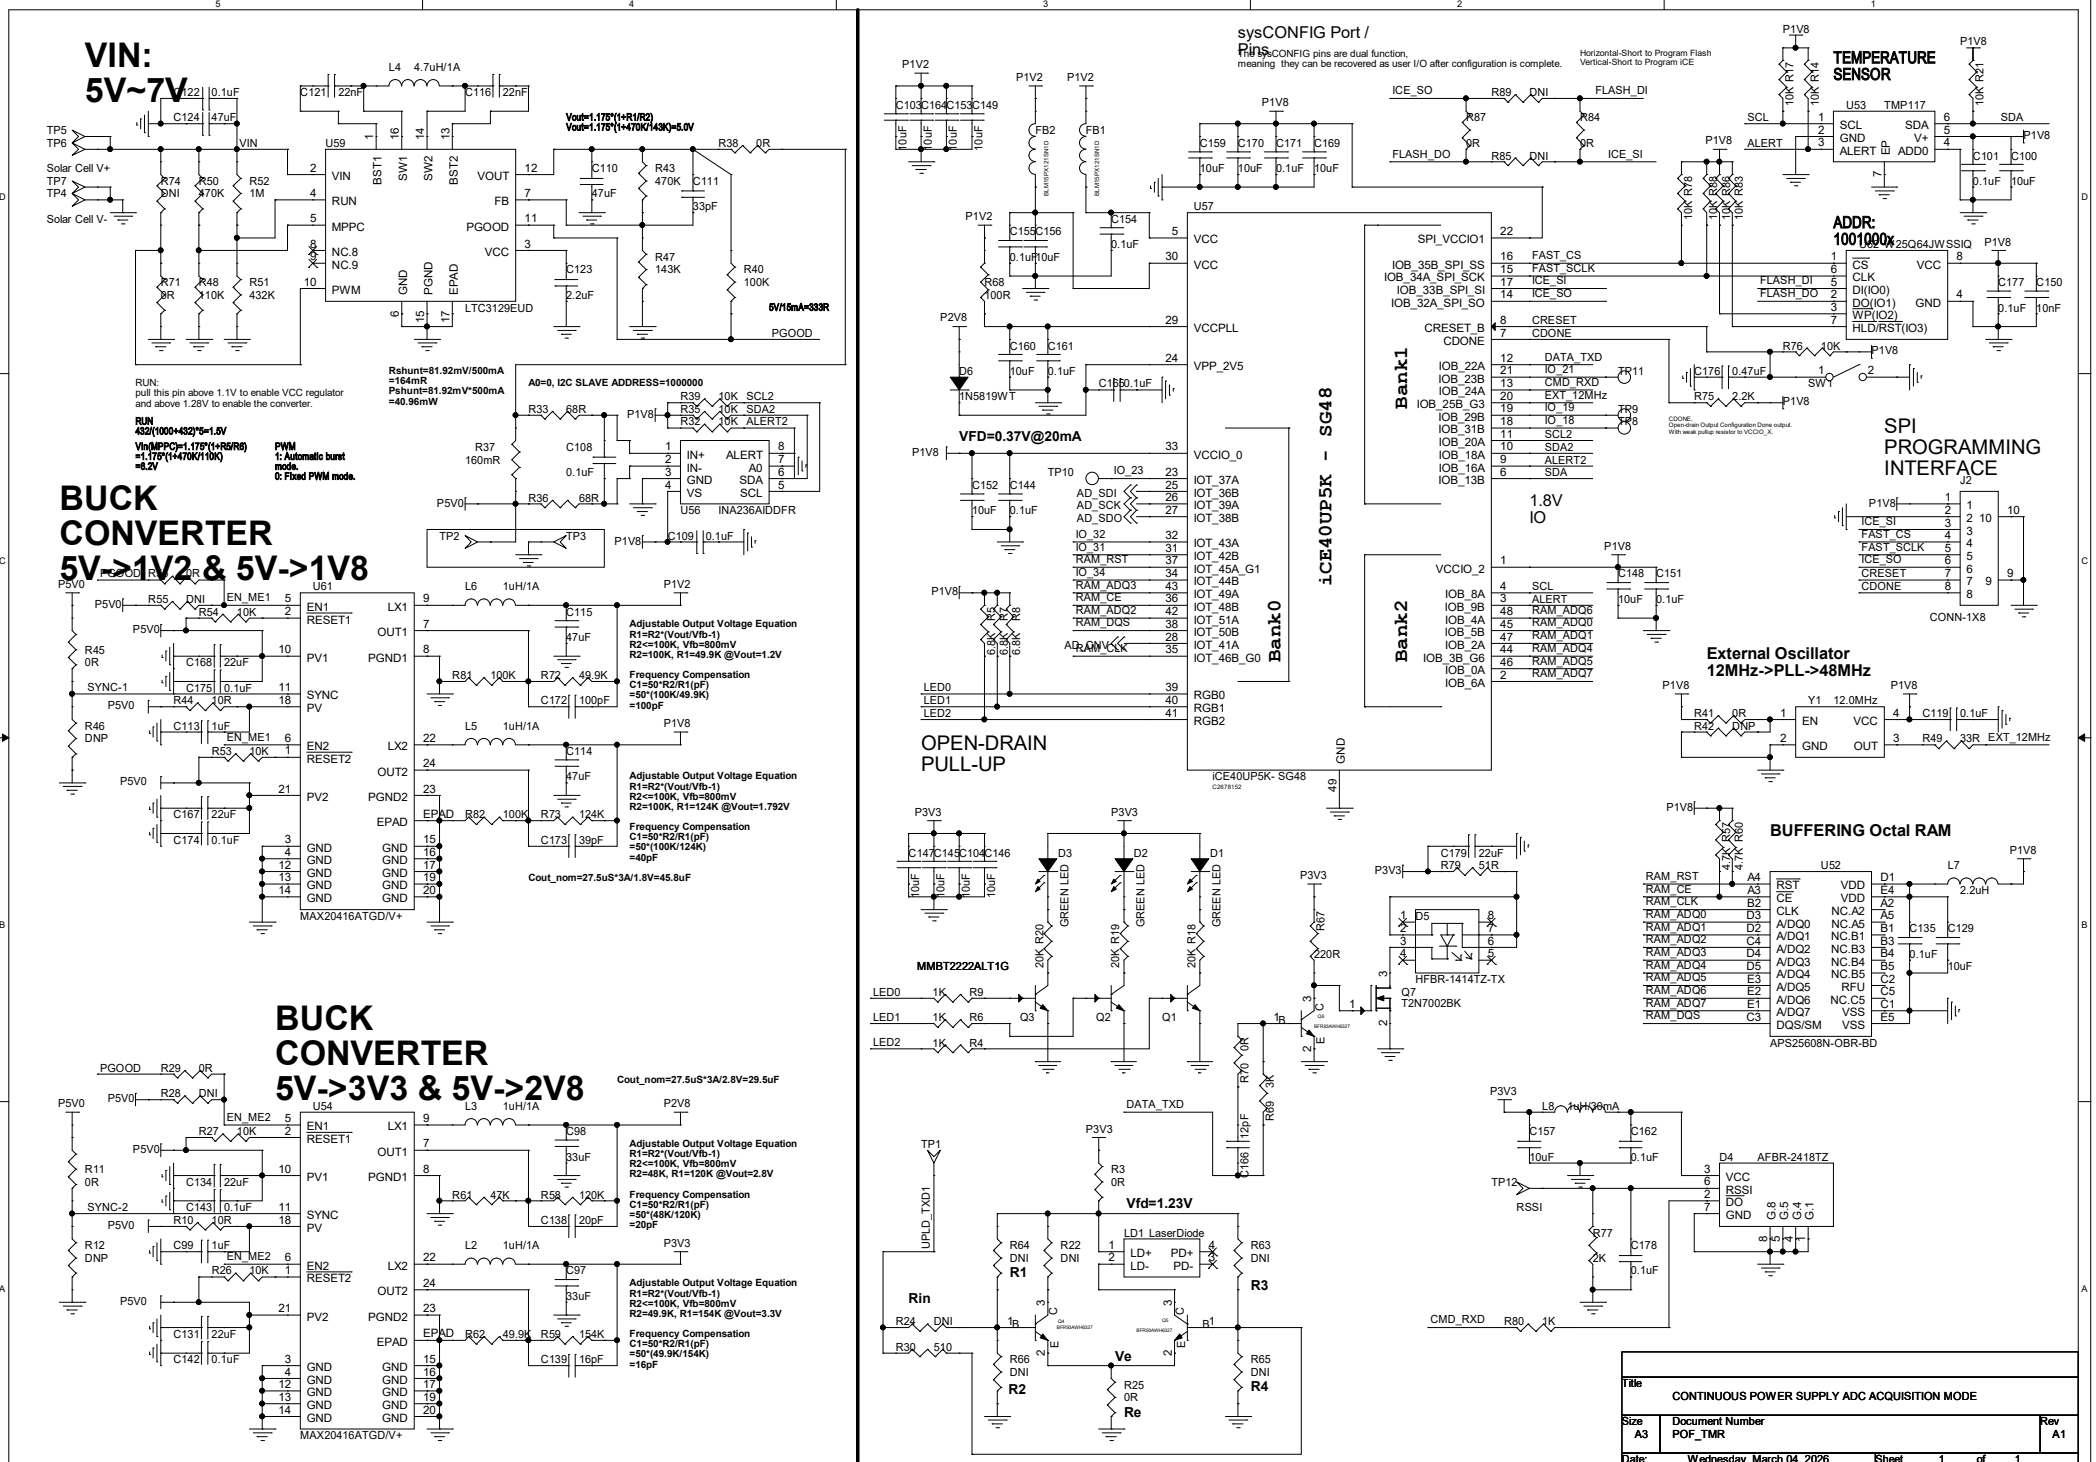
VIN:
5V~7V
BUCK CONVERTER
5V->1V2 & 5V->1V8
BUCK CONVERTER
5V->3V3 & 5V->2V8
sysCONFIG Port / Pins
The sysCONFIG pins are dual function, meaning they can be recovered as user I/O after configuration is complete.
Horizontal-Short to Program Flash
Vertical-Short to Program ICE
TEMPERATURE SENSOR
U53 TMP117
ADDR: 1001000x
U57 iCE40UP5K - SG48
iCE40UP5K- SG48
Bank0
Bank1
Bank2
1.8V IO
SPI PROGRAMMING INTERFACE
CONN-1X8
External Oscillator 12MHz->PLL->48MHz
Y1 12.0MHz
OPEN-DRAIN PULL-UP
MMBT2222ALT1G
HFBR-1414TZ-TX
Q7 T2N7002BK
BUFFERING Octal RAM
U52 APS25608N-OBR-BD
D4 AFBR-2418TZ
LD1 LaserDiode
Vfd=1.23V
VFD=0.37V@20mA
Rin
Ve
Re
R1
R2
R3
R4
U61 MAX20416ATGD/V+
U54 MAX20416ATGD/V+
U56 INA236AIDDFR
Title
CONTINUOUS POWER SUPPLY ADC ACQUISITION MODE
Size A3
Document Number POF_TMR
Rev A1
Date: Wednesday, March 04, 2026
Sheet 1 of 1