

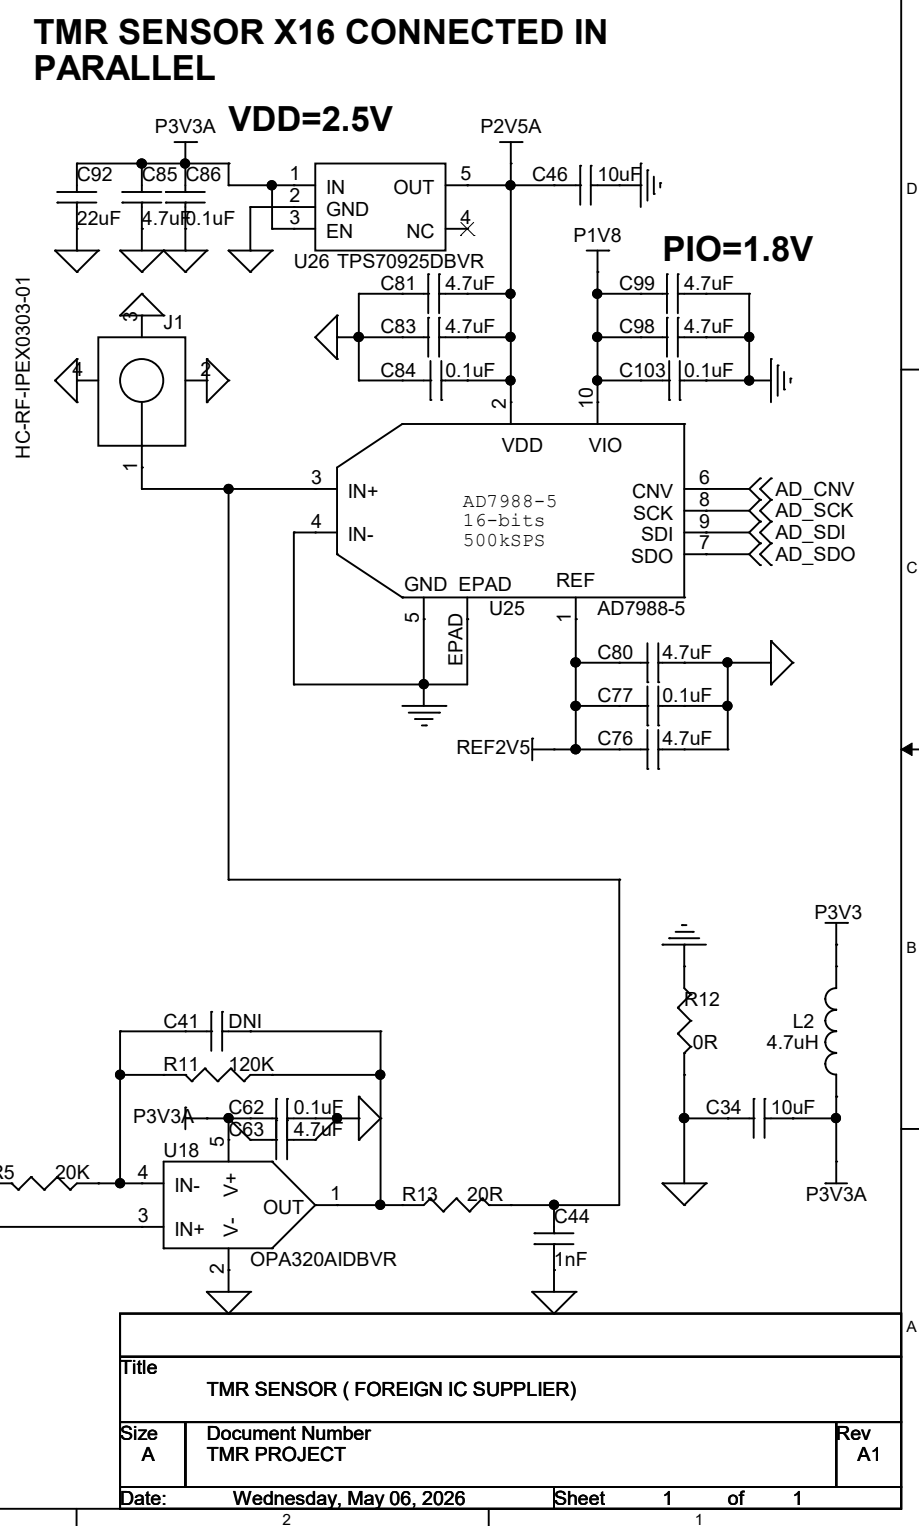


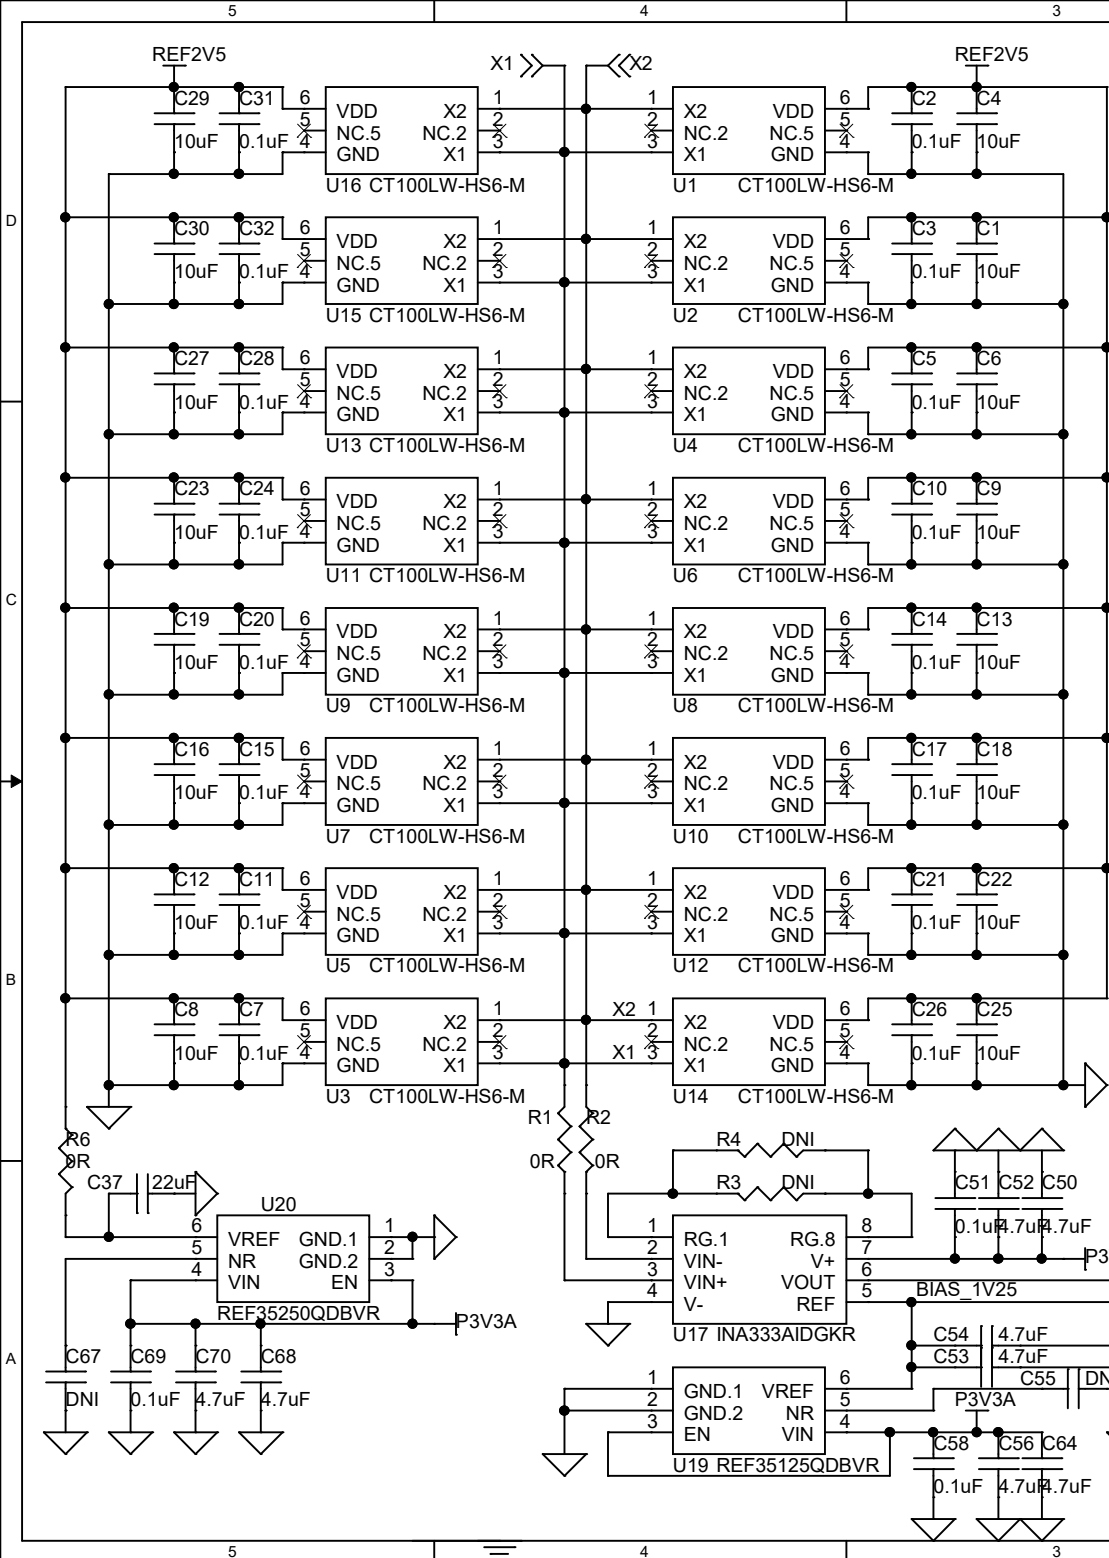

VIN: 5V~7V

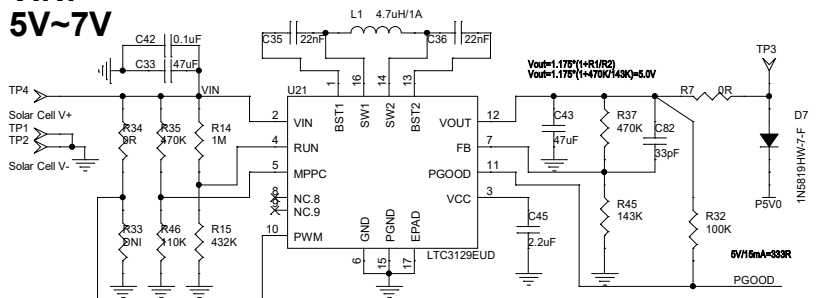


RUN:
pull this pin above 1.1V to enable VCC regulator
and above 1.28V to enable the converter.

RUN
452(1000+432)*=1.5V
Vout=1.175*(1+R1/R2)
=1.175*(1+470K/432K)
=6.2V


PWM
0: Automatic burst mode.
1: Fixed PWM mode.

BUCK CONVERTER 5V->1V2 & 5V->1V8

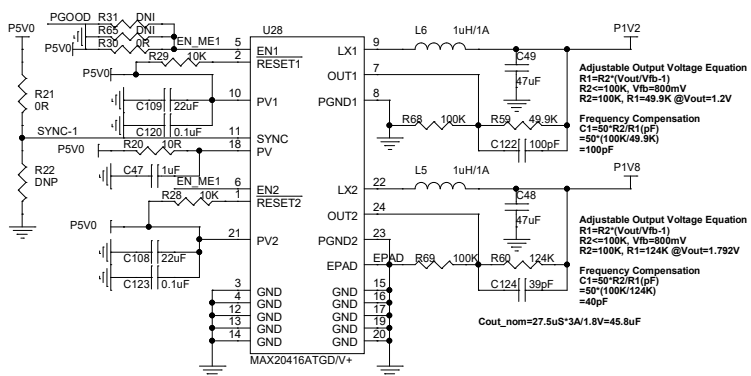

Cout_nom=27.5uS*3A/1.8V=45.8uF

BUCK CONVERTER 5V->3V3 & 5V->2V8

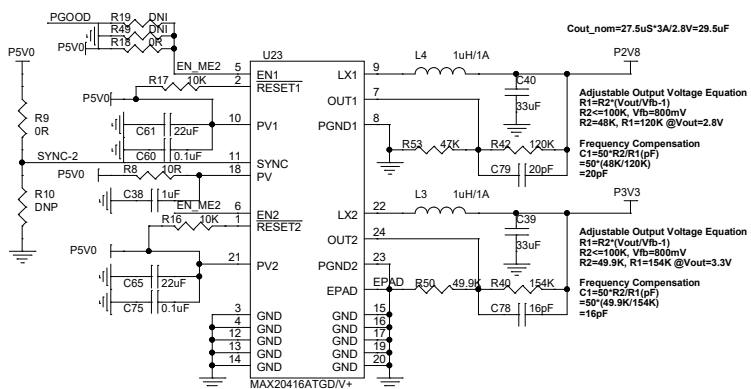


Cout_nom=27.5uS*3A/2.8V=29.5uF


Cout_nom=27.5uS*3A/1.8V=45.8uF

sysCONFIG Port /


Pin CONFIG pins are dual function,
meaning they can be recovered as user I/O after configuration is complete.

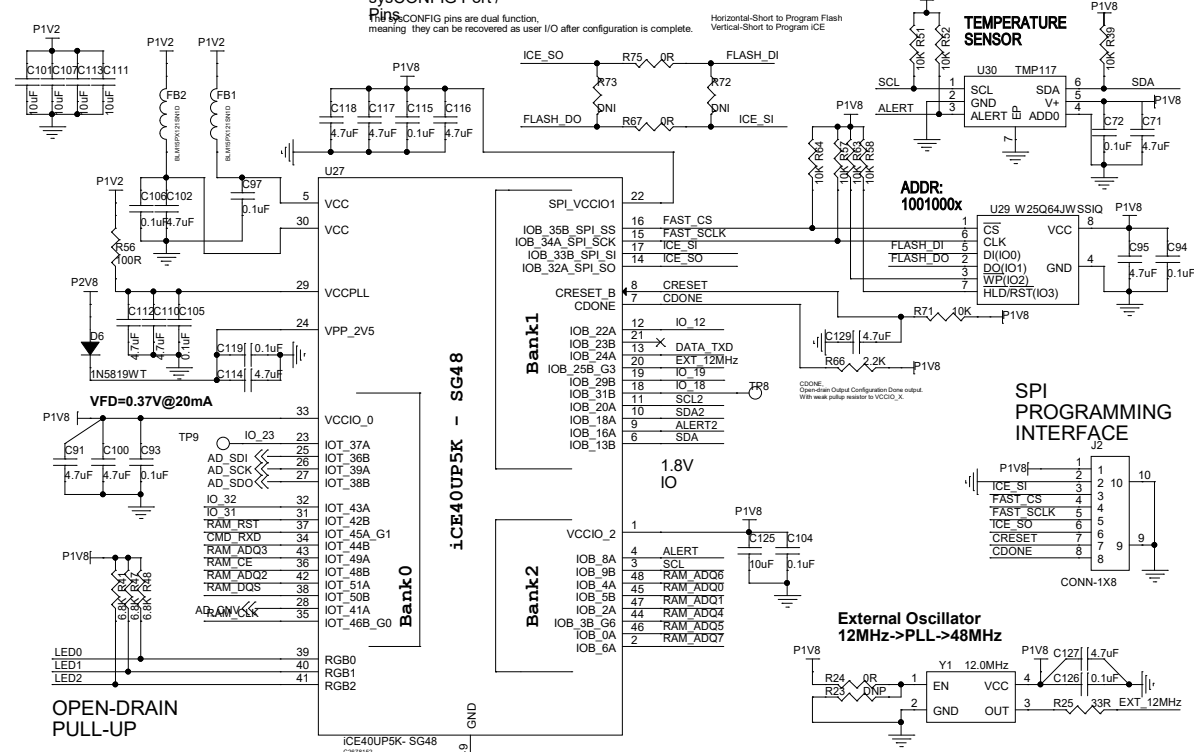


OPEN-DRAIN PULL-UP




Using TestPoints to fly-wire LEDs to Front Panel

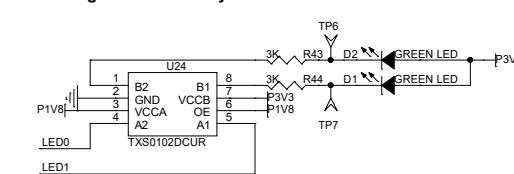


TEMPERATURE SENSOR




SPI PROGRAMMING INTERFACE



External Oscillator 12MHz->PLL->48MHz



BUFFERING Octal RAM

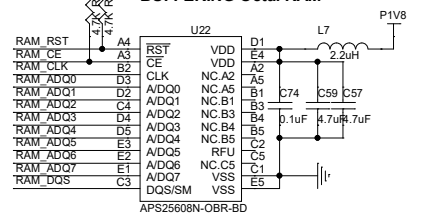

Title				
CONTINUOUS POWER SUPPLY ADC ACQUISITION MODE				
Size	Document Number			Rev
A3	POF_TMR			A1
Date:	Tuesday, May 12, 2026	Sheet	1 of 1	