

GAUGES ORDERING CODE

Example of how to make up the ordering product code:

PBB	A	63	SS	1	2	Q	C3B	CO1	S	T
Case design										
Configuration										
Nominal size										
System material										
Thread type										
Thread size										
Option X										
Range										
Customer reference										
Option 1										
Option 2										


For the complete part number for Diaphragm Pressure Gauges, please consult with your sales representative when placing an order.

Case Type and Size

Case	Case & Bezel Material (Std)	Size Code	Nom. Size mm (inch)	Available Configuration
PBB	Polished 304 Stainless Steel	63 10 15	63 (2 1/2) 100 (4) 150 (6)	A B C* D E F U V *100mm only
PBZ	Colour Coded (grey) PBT	10 15	100 (4) 150 (6)	A B
PBX	Colour Coded (black) PBT	10	100 (4)	A
PCB	Polished 304 Stainless Steel	63 10 15	63 (2 1/2) 100 (4) 150 (6)	A B C* D F U V *100mm only
PCZ	Colour Coded (grey) PBT	10 15	100 (4) 150 (6)	A B
PCK	Mild steel (black)	68	68 (2 1/2)	A D V
PDB	Polished 304 Stainless Steel	10 15	100 (4) 150 (6)	H
PDZ	Colour Coded (grey) PBT	10 15	100 (4) 150 (6)	H
DPG	Colour Coded (blue) PBT	10	100 (4)	A
MBB	Polished 304 Stainless Steel	10 15	100 (4) 150 (6)	A B C* D E F U V *100mm only
HGZ	Polished 304 Stainless Steel	10 15	100 (4) 150 (6)	A
PBG	304 Stainless Steel	52 63 10	52 (2) 63 (2 1/2) 100 (4)	A B C* D F U V *52mm back entry only
PBJ	Injection moulded (black) 304 Stainless Steel bezel	63 80	63 (2 1/2) 80 (3)	A
PBS	Polished 304 Stainless Steel	63	63 (2 1/2)	A D

Case	Case & Bezel Material (Std)	Size Code	Nom. Size mm (inch)	Available Configuration
PBN	Injection moulded case (black) polycarbonate clip-in lens	42 54 68	42 (1 1/2) 54 (2) 68 (2 1/2)	A D
PBM	Mild steel (black) polycarbonate clip-in lens	42 54 68	42 (1 1/2) 54 (2) 68 (2 1/2)	A D V
PBK	Mild steel threaded (black) polycarbonate window	42 54 68 96	42 (1 1/2) 54 (2) 68 (2 1/2) 96 (4)	A* D* V* only option for safety pattern 54 & 68mm only
PBU	Mild steel (black) Flat acrylic window	42 54 63 96 10 12	42 (1 1/2) 54 (2) 63 (2 1/2) 96 100 (4) 125 (5)	A B* D E* F* U* 54 & 68mm only on application 100mm, 125mm
PBV	Mild steel (black) nickel plated bezel, flat acrylic window	52	52 (2)	D V

Configurations

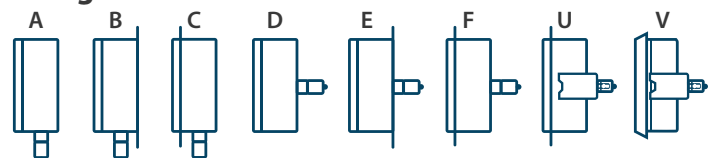

- A bottom connection, stem mounting
- B bottom connection, back flange, surface mounting
- C bottom connection, front flange, surface mounting
- D back connection, stem mounting
- E back connection, back flange, surface mounting
- F back connection, wide front flange, (drilled) panel mounting
- U back connection, wide front flange, (undrilled) panel mounting (yoke)
- V back connection, narrow front-ring, panel mounting (yoke)

GAUGES ORDERING CODE

Bourdon Tube Selection

System Code	Socket Material	Bourdon Tube Material (kPa)	Tube Type	Range Selection
BB	Brass	Bronze tube brass tip	C-tube	60 / 6 000
BB	Brass brass tip	Bronze tube -tube	Spiral	10 000 / 60 000
SS	316L Stainless steel	316 Ti tube and tip	C-tube	60 / 6 000
SS	316L Stainless steel	316 Ti tube and tip	Spiral	10 000 / 250 000
MM	Monel 400	K-Monel	C-tube	60 / 6 000
MM	Monel 400	K-Monel	Spiral	10 000 / 60 000

Utility gauges-ranges above 20 MPa on request

Capsule Systems Materials Selection

System Code	Socket Material	Capsule Material (kPa)	Tube Type	Range Selection
SS	316 L	Stainless	Capsule	2,5 to 100 kPa -10 to -25 kPa (valc)
BB	Brass	Copper	Capsule	2,5 to 100 kPa -6 to -25 kPa (valc)

Thread Type and Size

Thread Type	Thread Size (size code = number 1/8" 'S)
O = NPT	1 = 1/8"
1 = BSP	2 = 1/4"
2 = BSPT	3 = 3/8"
	4 = 1/2"

Customer Reference

Codes allocated to customers describing their specific requirements
 Standard CI gauge code is C01
 Where applicable consult with our sales representative for your specific code

Case Material and Colour Option 1

Q = standard (see Case type & size)

C = nickel plated

P = brass plated

S = stainless steel case (where not standard)

H = white

E = yellow

A = purple

O = orange

X = non standard (describe under special instructions)

R = red

L = blue

N = green

B = black

Range Codes (kPa)

Range		Dial Graduation	
kPa (kilopascal)	Range Code	Figure Interval	Minor Graduation
-10Pa/0	A1A	1	0.1
-16Pa/0	A1B	1	0.2
-25Pa/0	A1C	5	0.2
-40Pa/0	A1D	5	0.5
-60Pa/0	A1E	10	0.5
-100Pa/0	A1F	10	1
-160Pa/0	A2A	10	2
-250Pa/0	A2B	50	5
-400Pa/0	A2C	50	5
-600Pa/0	A2D	100	10
-1000Pa/0	A2E	100	10
-1600Pa/0	A2F	100	20
-2500Pa/0	A3A	500	50
-4000Pa/0	A3B	500	50
-6000Pa/0	A3C	1000	100
-1KPA/0	A3D	0.1	1.01
-1.6KPA/0	A3E	0.1	0.02
-2.5KPA/0	A3F	0.5	0.5
-4KPA/0	A4A	0.5	0.5
-6KPA/0	A4B	1	0.1
-10KPA/0	A4C	1	0.1
-16KPA/0	A4D	1	0.2
-25KPA/0	A4E	5	0.2
-40KPA/0	A4F	5	0.5
-60/0KPA	A5A	10	0.5
-100/0KPA	A5B	10	1
-40/600PA	B1A	100	10
-600/400PA	B1B	100	10
-600/1000PA	B1C	100	20
-1000/600PA	B1D	100	20
-1/1.5KPA	B1E	0.5	0.5
-1.5/1KPA	B1F	0.5	0.5
-1.5/2.5KPA	B2A	0.5	0.5
-2/4KPA	B2B	1	0.1
-2.5/1.5KPA	B2C	0.5	0.5
-4/2KPA	B2D	1	0.1
-4/6KPA	B2E	1	0.1
-6/4KPA	B2F	1	0.1
-6/10KPA	B3A	1	0.2
-10/6KPA	B3B	1	0.2
-10/15KPA	B3C	5	0.2
-15/10KPA	B3D	5	0.2
-15/25KPA	B3E	5	0.5
-25/15PKA	B3F	5	0.5
-20/40KPA	B4A	10	0.5
-40/20KPA	B4B	10	0.5
-40/60KPA	B4C	10	1
-60/40KPA	B4D	10	1
-60/100KPA	B4E	10	2
-100/60KPA	B4F	10	2
-100/100KPA	B4G	50	5
-100/150KPA	B5A	50	5
-100/300KPA	B5B	50	5
-100/500KPA	B5C	100	10
-100/900KPA	B5D	100	10
-100/1250KPA	B5J	100	20
-100/1500KPA	B5E	100	20
-100/1600KPA	B5G	100	20
-100/2400KPA	B5F	500	50
-100/2500KPA	B5I	500	50

Gauges may be ordered with non-standard metric dials (kPa, bar or kg/cm²). Range in accordance with SABS 1062.

Dual scale dials will be supplied with a standard metric inner scale and equivalent psi outer scale. psi dominant dual scales are also available. Please be specific when ordering.

GAUGES ORDERING CODE

Range Codes			
Range		Dial Graduation	
kPa (kilopascal)	Range Code	Figure Interval	Minor Graduation
0/10PA	C1A	1	0.1
0/16PA	C1B	1	0.2
0/25PA	C1C	5	0.2
0/40PA	C1D	5	0.5
0/60PA	C1E	10	0.5
0/100PA	C1F	10	1
0/160PA	C1G	10	2
0/250PA	C1H	50	5
0/400PA	C1J	50	5
0/600PA	C1K	100	10
0/1000PA	C1L	100	10
0/1600PA	C1M	100	20
0/2500PA	C2A	500	50
0/4000PA	C2B	500	50
0/6000PA	C2C	1000	100
0/1KPA	C2D	0.1	0.01
0/1.6KPA	C2E	0.1	0.02
0/2.5KPA	C2F	0.5	0.5
0/4KPA	C2G	0.5	0.5
0/6KPA	C2H	1	0.1
0/10KPA	C2J	1	0.1
0/16KPA	C2K	1	0.2
0/25KPA	C2L	5	0.2
0/40KPA	C2M	5	0.5
0/60KPA	C3A	10	0.5
0/100KPA	C3B	10	1
0/160KPA	C3C	10	2
0/250KPA	C3D	50	5
0/400KPA	C3E	50	5
0/600KPA	C3F	100	10
0/1000KPA	C3G	100	10
0/1600KPA	C3H	100	20
0/2500KPA	C3J	500	50
0/4000KPA	C3K	500	50
0/6000KPA	C3L	1000	100
0/1MPA	C3M	0.1	0.01
0/2.5MPA	C4A	0.1	0.02
0/1.6MPA	C4B	0.5	0.5
0/4MPA	C4C	0.5	0.5
0/6MPA	C4D	1	0.1
0/10MPA	C4E	1	0.1
0/16MPA	C4F	1	0.2
0/25MPA	C4G	5	0.2
0/40MPA	C4H	5	0.5
0/60MPA	C4J	10	0.5
0/100MPA	C4K	10	1
0/160MPA	C4L	10	2
0/250MPA	C4M	50	5
20/103KPA/0/10%LIN	D1A	10	0.5
20/103KPA/0/10SQ.RT	D1B	10	0.5
20/103KPA/0/100%LIN	D1C	10	0.5
20/103KPA/0/100SQ.RT	D1D	10	0.5
-30"HG/0	E1A	10	1
30"HGVAC/15PSI	F1A	50	5
-30"HGVAC/30PSI	F1B	50	5
-30"HGVAC/60PSI	F1C	50	5
-30"HGVAC/100PSI	F1D	100	10
-30"HGVAC/150PSI	F1E	100	10
-30"HGVAC/200PSI	F2A	100	20
-30"HGVAC/300PSI	F2B	500	50
-30"HGVAC/400PSI	F2C	500	50
0/10"H2O	G1A	0.5	0.5
0/15"H2O	G1B	0.5	0.5
0/30"H2O	G1C	1	0.1
0/60"H2O	G1D	1	0.2

Range Codes			
Range		Dial Graduation	
kPa (kilopascal)	Range Code	Figure Interval	Minor Graduation
0/100"H2O	G1E	5	0.2
0/150"H2O	G1F	5	0.5
0/200"H2O	G1G	10	0.5
0/300"H2O	G1H	10	0.5
0/3PSI	G2A	0.2	0.2
0/5PSI	G2B	0.2	0.2
0/10PSI	G2C	0.5	0.2
0/15PSI	G2D	1	0.2
0/20PSI	G2E	5	0.5
0/30PSI	G2F	5	0.5
0/25PSI	G2H	5	0.5
0/40PSI	G2J	5	0.5
0/60PSI	G2G	10	1
0/80PSI	G2K	10	1
0/100PSI	G3A	10	1
0/160PSI	G3B	10	1
0/200PSI	G3C	50	2
0/300PSI	G3D	50	5
0/400PSI	G3E	50	5
0/500PSI	G3F	100	10
0/600PSI	G3G	100	10
0/800PSI	G3H	100	10
0/1000PSI	G3J	100	10
0/1500PSI	G3K	500	20
0/2000PSI	G3L	500	20
0/3000PSI	G4A	500	50
0/4000PSI	G4B	500	50
0/5000PSI	G4C	1000	100
0/6000PSI	G4D	1000	100
0/10 000PSI	G4E	1000	100
0/15 000PSI	G4F	5000	500
0/20 000PSI	G4G	5000	500
0/30 000PSI	G4H	5000	500
3/15PSI/0/10%LIN	H1A	10	1
3/15PSI/0/10SQ.RT	H1B	10	1
3/15PSI/0/100%LIN	H1C	10	1
3/15/0/100SQ.RT	H1D	10	1
0/1.0BAR	J1A	0.1	0.01
0/1.6BAR	J1B	0.1	0.02
0/2.0BAR	J1C	0.5	0.05
0/2.5BAR	J1D	0.5	0.05
0/4.0BAR	J1E	1	0.1
0/5.0BAR	J1F	1	0.1
0/6.0BAR	J1G	1	0.1
0/7.0BAR	J1H	1	0.1
0/8.0BAR	J1J	2	0.2
0/10BAR	J2A	2	0.2
0/11BAR	J2B	2	0.2
0/16BAR	J2C	5	0.5
0/20BAR	J2D	5	0.5
0/25BAR	J2E	5	0.5
0/30BAR	J2F	5	0.5
0/35BAR	J2G	5	0.5
0/50BAR	J2K	10	1
0/40BAR	J2H	10	1
0/60BAR	J2J	10	1
0/100BAR	J3A	20	2
0/160BAR	J3B	50	5
0/250BAR	J3C	50	5
0/300BAR	J3J	100	10
0/400BAR	J3D	50	5
0/500BAR	J3K	100	10
0/600BAR	J3I	100	10
0/1000BAR	J3F	200	20
0/1600BAR	J3G	500	50
0/2500BAR	J3H	500	50

Note: Where required range has no code indicated, that range should be clearly specified on ordering