

PBJ - LIQUID FILLED PLASTIC CASED INDUSTRIAL

RHOMBERG
INSTRUMENTS




The Rhomberg PBJ series (utility) is ideal for use in the refrigeration industry, especially those experiencing vibration, pulsation and shock.

A utility gauge is a mechanical device usually used for measuring the pressure of gases or liquids. It consists of a semicircular or coiled, flexible metal tube attached to a connector block.

These gauges are made from brass, stainless steel and others. It is suitable for use with any liquid or gas that does not attack the copper alloys. It can be available in various dial sizes.

This gauge is commonly used for pumps, compressors and predominately in the refrigeration industry and incorporates a rear entry zero adjustable screw.

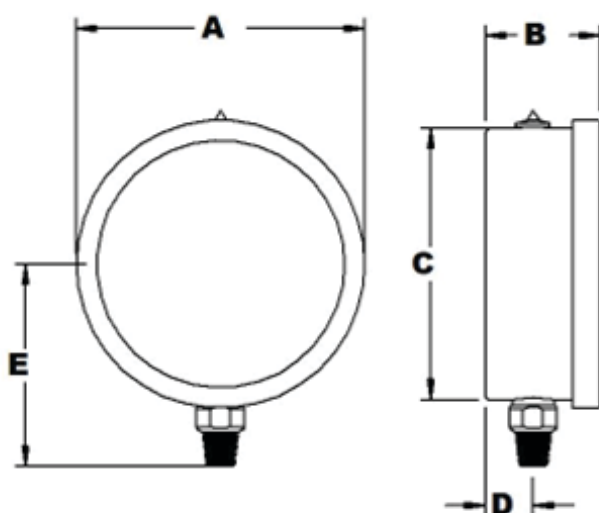

Materials

Housing	Nylon 6, 15% GF (black, red and blue other colours on request)
Bezel	304SS (316SS on request)
Window	Polycarbonate
Wetted Parts	Brass or 316L SS (block & tube)
Pointer	Aluminium (black)
Seals	Nitrile
Dial	Aluminium/white background and black numerals (customized designs on request)
Fill Plug	2-part Body material (TPV)

Configuration

A

Nominal Sizes

63mm(2.5") 80mm(3.15")

Dampening

Glycerine filled

Accuracy

1.6% FSD

Nett Mass

63mm: 240g filled
80mm: 400g filled

Temperature

Operating -25 DC to 60 DC
Medium -25 DC to 85 DC
Storage -40 DC to 85 DC

Ingress (Weather Protection)

IP67

Accreditation

SABS1062


Thread Sizes

$\frac{1}{8}$ - $\frac{1}{4}$ BSP/NPT (for other sizes and types, please contact the factory)

Pressure Range

Brass internals: vacuum - 0 - 60MPa. Over Pressure Limit, 25% FSD for brief periods

Stainless Steel internals: vacuum - 0 - 70MPa. Over Pressure Limit, 25% FSD for brief periods

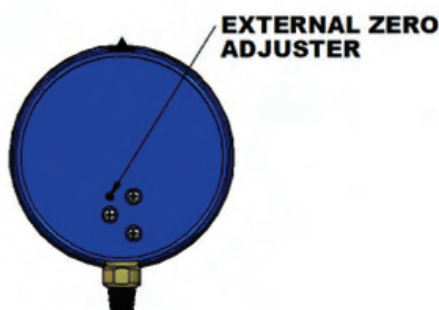

Nominal Sizes

Dimension		A	B	C	D	E
63mm (2.5")	Metric Imperial	85,00 3,35	34,00 1,34	80,00 3,15	14,00 0,55	60,00 2,36
100mm (4")	Metric Imperial	69,00 2,72	33,00 1,30	64,00 2,52	14,00 0,55	52,00 2,05

Dimensions