

DUAL-MOTOR PMSM DYNAMOMETER PLATFORM

PLATFORM, ELECTRICAL & INTERFACES

TI LAUNCHXL-F28069M, dual BOOSTXL-DRV8305EVM stages, encoders, CAN, power, and physical verification

ENGINEERING REQUIREMENTS DOCUMENT | REVISION 2.4 | 5 AUGUST 2026



Functional Requirements Document Framework

WHY THIS IS AN FRD

This document defines the physical and electrical behavior the platform shall provide, the interfaces and constraints under which it shall operate, and the objective evidence required for acceptance. Vendor diagrams and photographs support verification; they do not transfer ownership of third-party board designs.

Purpose, Scope, and System Boundary

This FRD provides a customer-facing public description of the dynamometer platform, its physical system boundary, major electrical elements, evidence basis, and qualification limits. Detailed implementation and deployment records are intentionally withheld.

1. Platform Architecture

The platform combines a TI C2000 controller, two three-phase inverter stages, two mechanically coupled encoder-equipped PMSMs, a shared bench supply, and a real-time measurement workflow. The public description is limited to the system architecture and integration boundary.

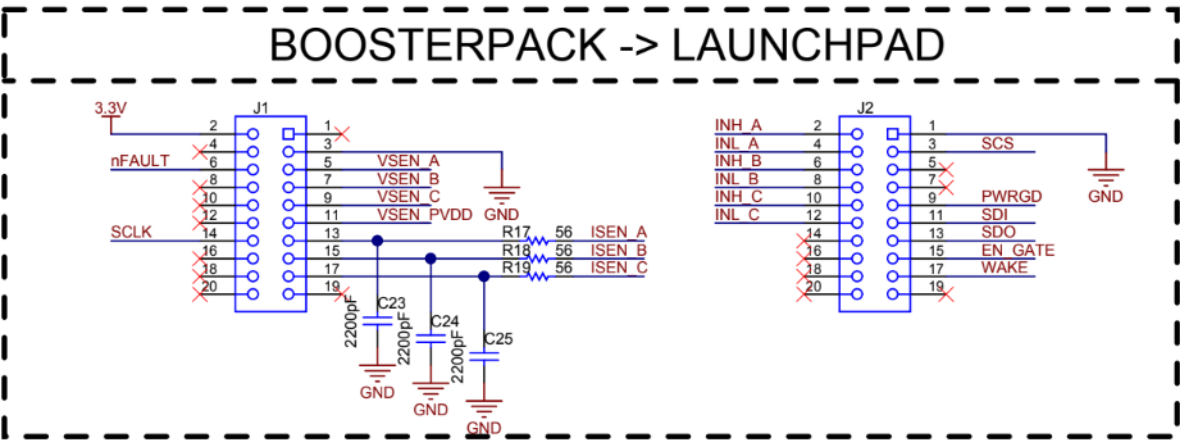


Figure 1. BoosterPack-to-LaunchPad board-interface arrangement.

1.1 Primary Elements

Element	Quantity	Public role
LAUNCHXL-F28069M	1	Embedded controller, encoder interfaces, PWM/ADC and CAN endpoint
BOOSTXL-DRV8305EVM	2	Three-phase inverter stages for drive and load machines
Encoder-equipped PMSM	2	Mechanically coupled drive and load machines
24 V DC supply	1	Current-limited bench power source
CAN interface	1	Supervisory physical-layer connection

Integrated setup views

These photographs document the physical integration boundary used for the public hardware description: the controller, dual inverter stages, cabling, and interface hardware are shown as an assembled test setup rather than as isolated board references. Original source photographs are retained in [media/physical_setup/original/](#).

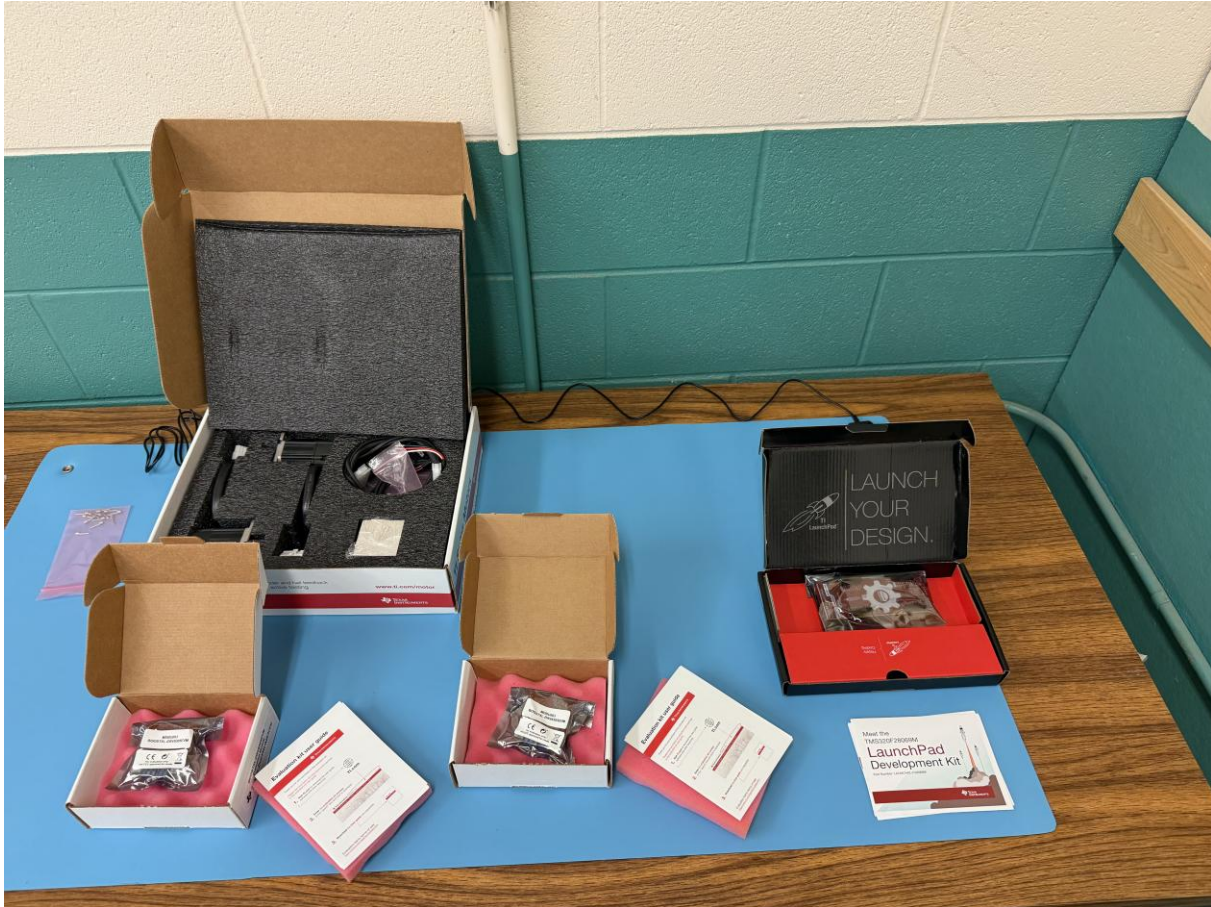


Figure 4. Integrated setup components: controller, inverter, cable, and interface hardware arranged for system integration.



Figure 5. TI C2000 LaunchPad and connected interface cabling.

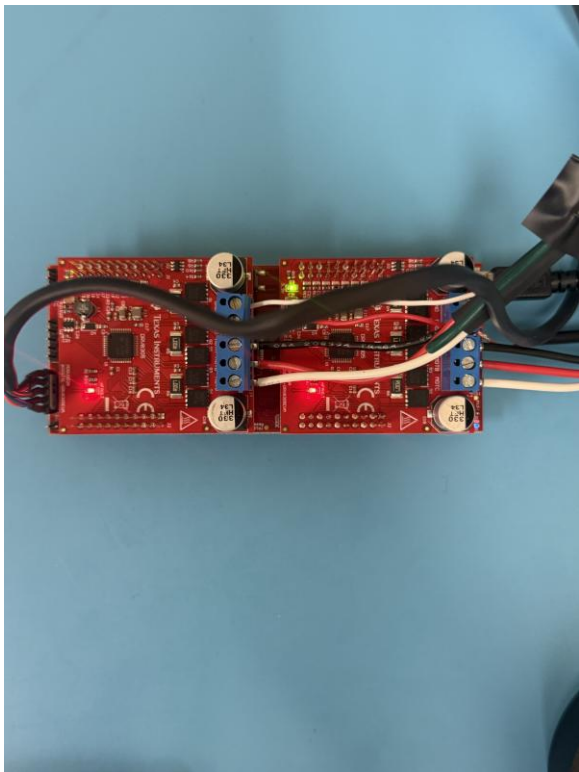


Figure 6. Two inverter boards shown with their connected cabling.

2. Platform and Electrical Requirements

ID	The system shall...	Verification	Status
PLT-001	The platform shall provide two mechanically coupled encoder- Dual-Motor PMSM Dynamometer - Platform and Electrical FRD • Controlled engineering document	Inspection	Demonstrated

ID	The system shall...	Verification	Status
	equipped PMSMs.		
PLT-002	The controller stack shall support two independent three-phase inverter stages.	Inspection	Demonstrated
PLT-003	The platform shall retain physical access for deployment, diagnostics, and emergency shutdown.	Inspection	Demonstrated
PLT-004	Rotating components shall be restrained and kept clear of hands during operation.	Procedure review	Required
PLT-005	The public release shall distinguish institution-owned or third-party hardware from authored models and source.	Document review	Verified

2.1 Power and Motor Interface Requirements

3. Interfaces and deployment boundary

The public release identifies the controller, motor, feedback, power, and supervisory communication boundaries at a system level. Detailed connector maps, message definitions, deployment procedures, and calibration records are withheld.

4. Schematics, BOM, and Ownership Boundary

Vendor and third-party material is acknowledged only at a high level. Detailed schematics, bills of material, connector maps, and manufacturing information are not included in this public FRD.

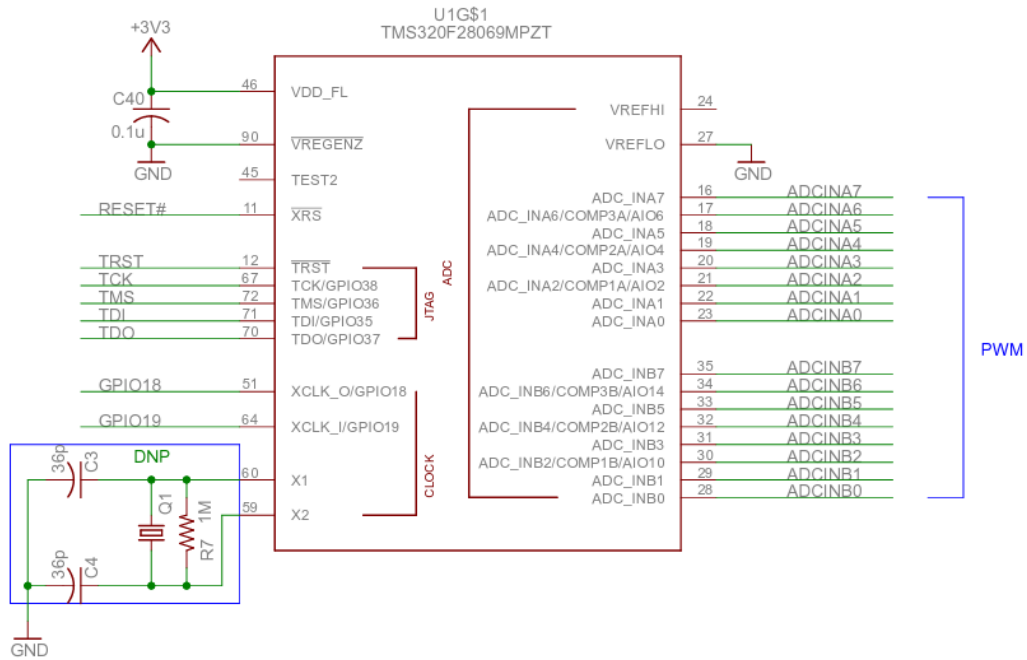


Figure 3. LaunchPad reference view retained for connector orientation.

5. Verification and Acceptance

Platform verification was considered across physical inspection, interface review, controlled measurement, feedback observation, and communication checks. Detailed procedures and configuration records are withheld from this public FRD.

5.1 Open Qualification Items

- Independent torque and electrical-power calibration are outside this release.
- Formal EMC, vibration, ingress, environmental, and long-duration thermal qualification are not included.
- A complete independent protection chain and certified stop architecture are not claimed.
- No vendor PCB manufacturing sources, Gerbers, pick-and-place files, or fabrication packages are redistributed.

5.2 Release Gate

Inherited platform and station boundary

The controller and inverter boards, motors, mechanical dynamometer fixtures, laboratory infrastructure, Speedgoat hardware, and vendor support packages were provided or inherited. This release documents integration work on that platform and does not claim authorship of TI or vendor board designs.

Station-specific procedures, records, identifiers, and deployment details are outside this public release.	