

1. Description

1.1. Project

Project Name	uwbllocation
Board Name	32F429IDISCOVERY
Generated with:	STM32CubeMX 4.25.1
Date	07/11/2018


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F429ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Caution

The report was generated although the configuration was in a modified state. It may be not accurate

2. Pinout Configuration

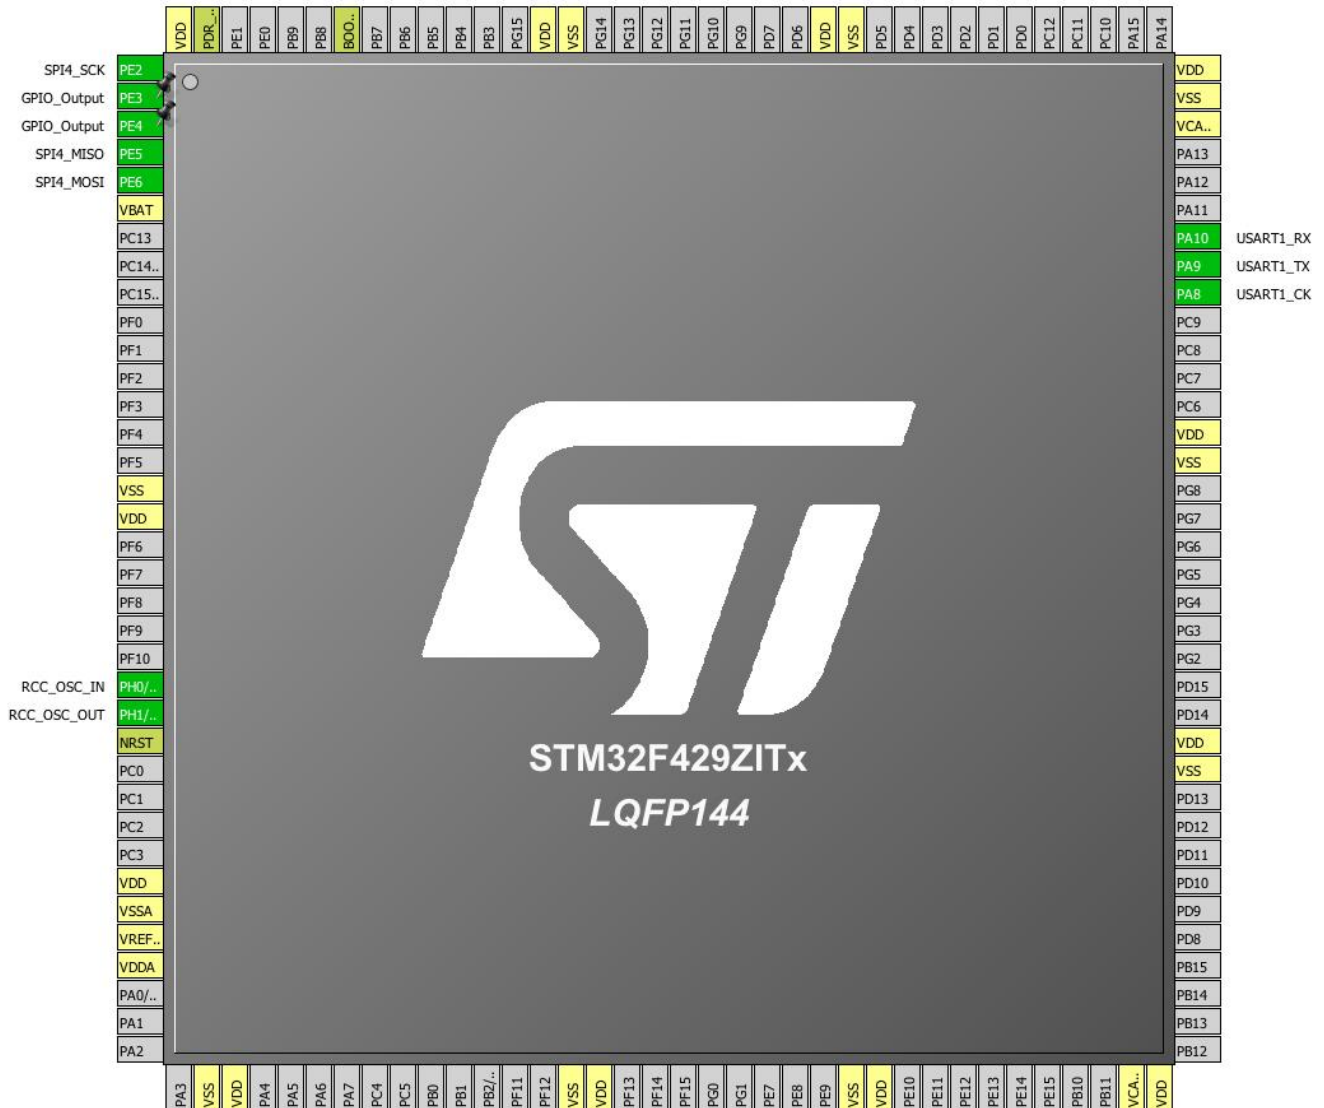


3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2	I/O	SPI4_SCK	
2	PE3 *	I/O	GPIO_Output	
3	PE4 *	I/O	GPIO_Output	
4	PE5	I/O	SPI4_MISO	
5	PE6	I/O	SPI4_MOSI	
6	VBAT	Power		
16	VSS	Power		
17	VDD	Power		
23	PH0/OSC_IN	I/O	RCC_OSC_IN	
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
38	VSS	Power		
39	VDD	Power		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD	Power		
100	PA8	I/O	USART1_CK	
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
120	VSS	Power		
121	VDD	Power		
130	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
131	VDD	Power		
138	BOOT0	Boot		
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

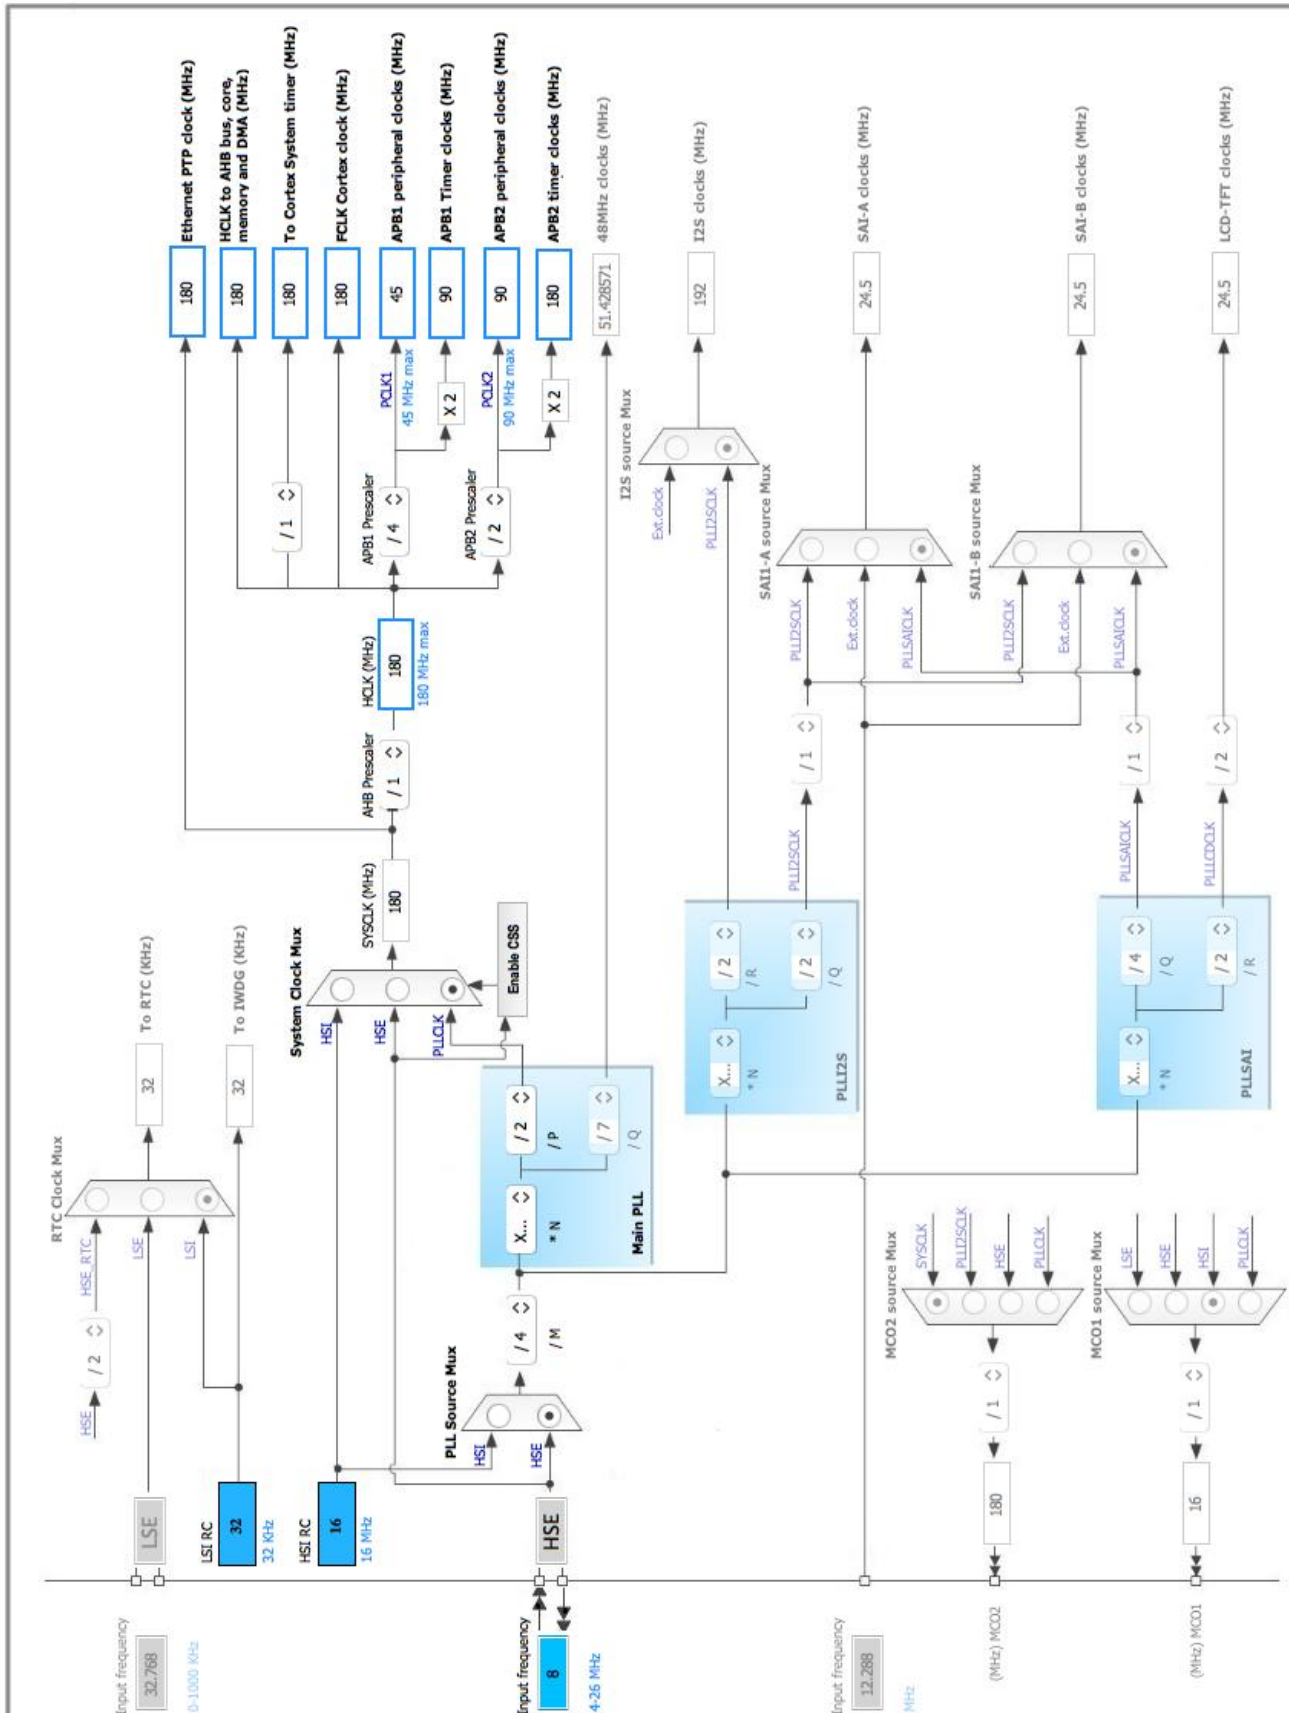

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Enabled

5.2. SPI4

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	45.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.3. SYS

Timebase Source: SysTick

5.4. USART1

Mode: Synchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
----------------	----------------------

Clock Parameters:

Clock Polarity	Low
Clock Phase	One Edge
Clock Last Bit	Disable

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI4	PE2	SPI4_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PE5	SPI4_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PE6	SPI4_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART1	PA8	USART1_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PE4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		
FPU global interrupt	unused		
SPI4 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F429ZITx
Datasheet	024030_Rev9

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Pack Report

9. Software Project

9.1. Project Settings

Name	Value
Project Name	uwbllocation
Project Folder	/Users/zhaoxiaowei/CLionProjects/uwbllocation
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

9.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No