


❖ Implement the 2-bit predictor (exercise 3) with the help of interrupts

- The interrupts are used for considering the events (e.g. switching from state 00 to state 01 via receiving the interrupt event “taken”)

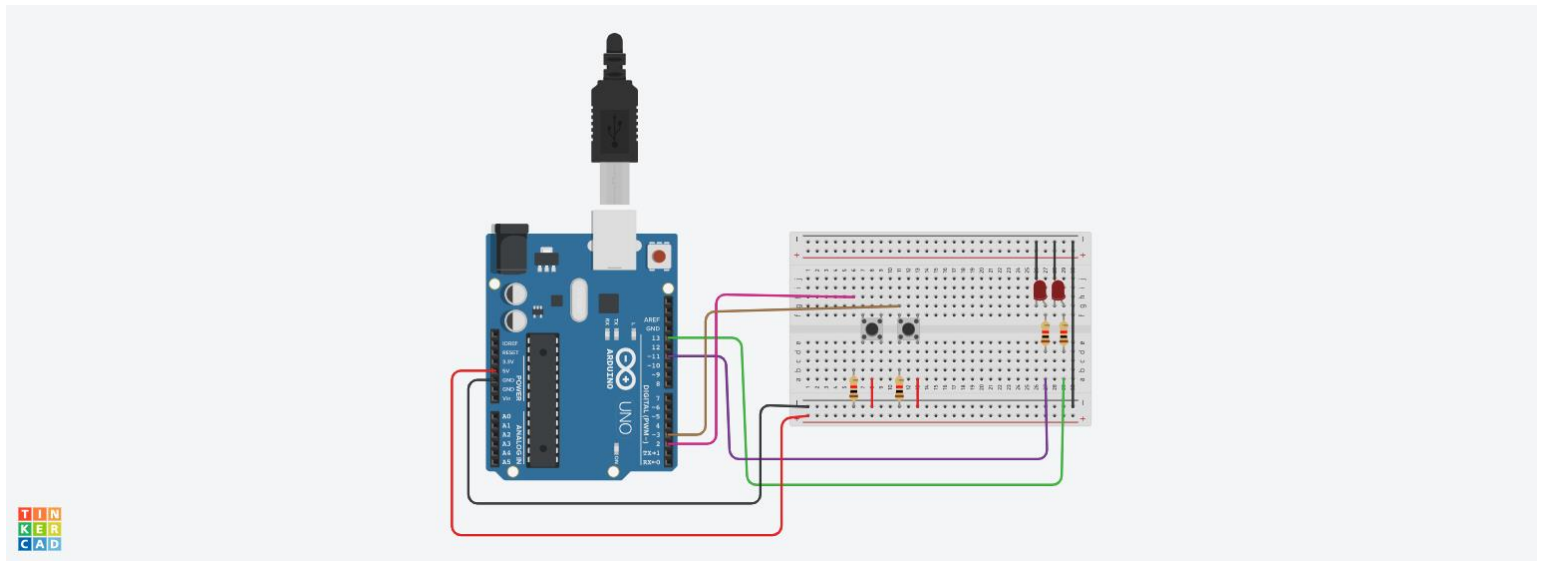

Tinkercad link : <https://www.tinkercad.com/things/3tAtiDu3wXB-shihab-/editel>