


2-M8↓16(下穴貫通不可)
(NOT THROUGH PREPARED HOLE)
(吊用)(FOR HANGING USE)
(等分)(EQUALLY SPACED)



注記 NOTE

- 1.角稜部は、ぱり・かえり除去の事
REMOVED BURRS FROM THE CONTOUR EDGE
 - 2.応力除去焼きなまし 温度550～600 °C
ANL FOR STRESS RELIEVING TEMP. 550～600 °C
 - 3.本図は木型図を兼ねる
THIS DRAWING IS ALSO USED AS THE WOODEN PATTERN DRAWING

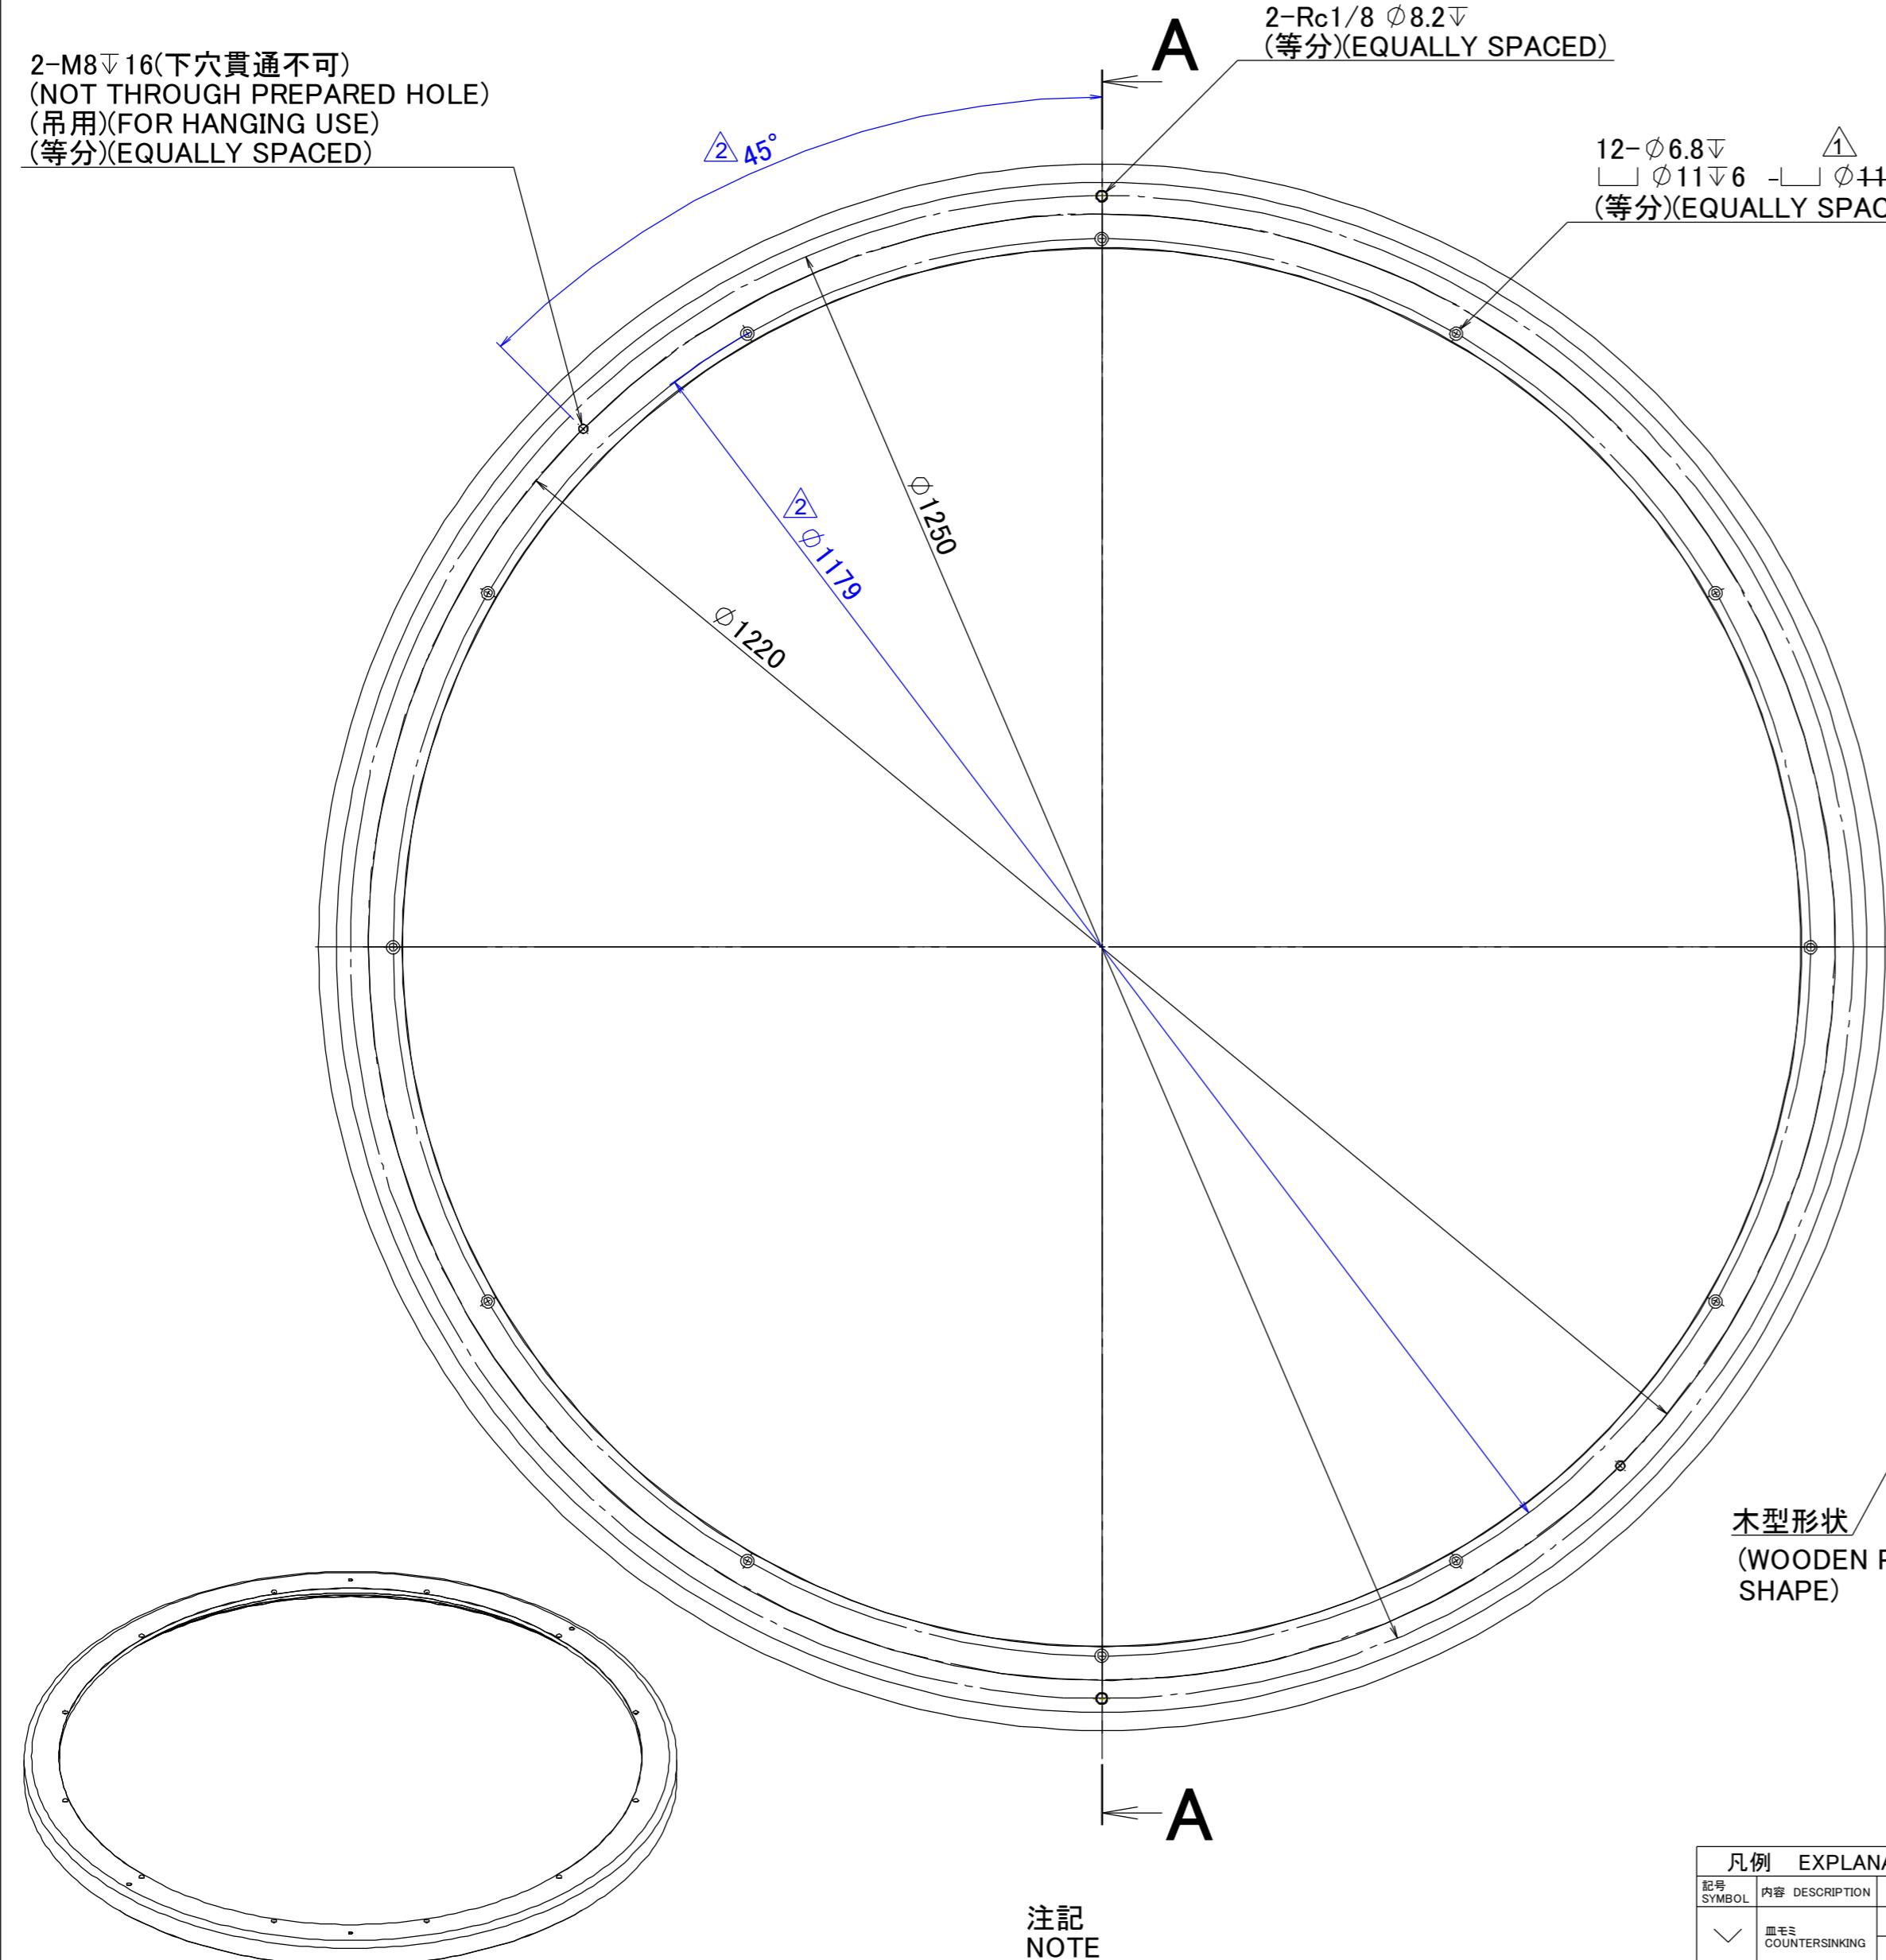