

RESEARCH

Open Access



# Assessing road criticality and loss of healthcare accessibility during floods: the case of Cyclone Idai, Mozambique 2019

Sami Petricola<sup>1</sup>, Marcel Reinmuth<sup>2\*</sup>, Sven Lautenbach<sup>1,2</sup>, Charles Hatfield<sup>2</sup> and Alexander Zipf<sup>1,2</sup>

## Abstract

**Background:** The ability of disaster response, preparedness, and mitigation efforts to assess the loss of physical accessibility to health facilities and to identify impacted populations is key in reducing the humanitarian consequences of disasters. Recent studies use either network- or raster-based approaches to measure accessibility in respect to travel time. Our analysis compares a raster- and a network-based approach that both build on open data with respect to their ability to assess the loss of accessibility due to a severe flood event. As our analysis uses open access data, the approach should be transferable to other flood-prone sites to support decision-makers in the preparation of disaster mitigation and preparedness plans.

**Methods:** Our study is based on the flood events following Cyclone Idai in Mozambique in 2019 and uses both raster- and network-based approaches to compare accessibility to health sites under normal conditions to the aftermath of the cyclone to assess the loss of accessibility. Part of the assessment is a modified centrality indicator, which identifies the specific use of the road network for the population to reach health facilities.

**Results:** Results for the raster- and the network-based approaches differed by about 300,000 inhabitants (~800,000 to ~500,000) losing accessibility to healthcare sites. The discrepancy was related to the incomplete mapping of road networks and affected the network-based approach to a higher degree. The modified centrality indicator allowed us to identify road segments that were most likely to suffer from flooding and to highlight potential backup roads in disaster settings.

**Conclusions:** The different results obtained between the raster- and network-based methods indicate the importance of data quality assessments in addition to accessibility assessments as well as the importance of fostering mapping campaigns in large parts of the Global South. Data quality is therefore a key parameter when deciding which method is best suited for local conditions. Another important aspect is the required spatial resolution of the results. Identification of critical segments of the road network provides essential information to prepare for potential disasters.

**Keywords:** Disaster, Public health, Routing, OpenStreetMap, Accessibility, Network

## Background

Induced by climate change and human activities, the frequency and intensity of extreme natural disasters are growing continuously [1]. According to the UN, changes in weather and climate account for 90% of disasters and the number of disasters including floods, droughts, heatwaves, and devastating storms has doubled since the'80 s [2]. While natural disasters are occurring in most

\*Correspondence: marcel.reinmuth@heigit.org

<sup>1</sup> GIScience department, Institute of Geography, Heidelberg University, Heidelberg, Germany  
Full list of author information is available at the end of the article



© The Author(s) 2022. **Open Access** This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>. The Creative Commons Public Domain Dedication waiver (<http://creativecommons.org/publicdomain/zero/1.0/>) applies to the data made available in this article, unless otherwise stated in a credit line to the data.

regions of the globe [3], their impact remains dependent on the local context as low-income countries have fewer resources to prepare, mitigate, and recover [4]. Cyclone Idai which hit the southeastern coast of Africa in March 2019 is an example of a large-scale event affecting low-income countries.

Beyond the direct damages caused by natural disasters, the consequences often depend on the cascading effects induced. This results from a series of failures of interconnected or dependent infrastructure causing “physical, social or economic disruption”: “cascading effects are associated more with the magnitude of vulnerabilities than with that of hazards” [5]. In some regions of the Global South, such cascading effects can cause tremendous damage in addition to direct physical effects on populations. Access to essential services can swiftly drop due to the lack of backup roads within the network, poor quality of building materials of health facilities, and the remoteness of populations [6]. The loss of accessibility to health facilities trigger, in turn, subsequent risks like epidemics [7], delayed treatment, and jeopardize health prevention and promotion programs. For example, outbreaks of vaccine-preventable diseases, such as diphtheria or measles in Bangladesh and the Central African Republic respectively, emerged when populations lost access to healthcare [8].

Rapid deployment of emergency responses is key to reducing the acute effects of disasters on communities. Therefore, it is necessary to develop swiftly calculable and easily interpretable metrics based on open data that can be used to identify the most affected populations, particularly in the Global South where international actors often lack knowledge of the local context and the availability of key official information is scarce [9]. In the preparedness, mitigation, and recovery phases of the disaster management cycle, the focus switches toward the operationality of the infrastructures providing access to healthcare. The concept of infrastructure criticality is commonly understood in literature and disaster management [10, 11] as the propensity of an infrastructure to affect the network's connectivity in case of failure [12]. Thus, assessing the lack of resilience of one or several road segments which may inhibit access to health facilities allows to identify the potential weak points in the road network and gives actionable data options for disaster management [13, 14].

### State of the art and research gaps

In the last decade, many metrics have been developed [15] to measure the potential access of populations to healthcare as defined by Guagliardo [16]. Recent metrics such as gravity-based and floating catchment area measures [17] offer advantages, but studies [15, 18], have

shown that the complexity of interpretation, implementation, and the need of detailed data (facility type and capacity) are barriers to their use by practitioners in real-life scenarios. In contexts of the Global South where data is often scarce or not available and for emergency response applications, simpler metrics which require less detailed data are often preferred. For instance, raster-based approaches have been used at a global scale [19], for the analysis of individual disasters [20], and for the optimization of road development in rural Nepal [21]. Other studies have investigated the potential access to health facilities based on network-based methods at the country level [22]. Examples involve the analysis of the impacts of conflicts [23], epidemics [24], and flooding [13, 25, 26]. The two approaches build on two fundamentally different representations of space. For raster-based approaches, travel time per cell is usually calculated as a function of street presence and street characteristics, land use, and terrain. In contrast, network-based approaches model travel time primarily based on the road network and its properties. Previous studies have compared the two approaches. However, they did not conclude on the best approach but rather highlighted some differences to be adapted according to the context [27, 28]. Our study aimed at a more detailed comparison of the two approaches for the assessment of the share of the population vulnerable to a loss of accessibility to healthcare in the specific context of emergency response during a flood disaster with datasets accessible in a timely manner.

One important aspect of disaster preparedness is the criticality of infrastructure. In our case the focus is on the criticality of the road network. This involves the question of how sensitive accessibility to healthcare sites is to the failure of individual road segments by a disaster. Studies using graph theory in an urban context [29–31] have shown the relevance of centrality indicators for this purpose. Other studies used this indicator to assess the vulnerability of a road network in the context of floods at the urban level [25, 32] as well as at the national level [33]. Betweenness centrality of a network node—or edge—[34] sums the number of shortest paths between all pairs of nodes of the network to go through this node. A higher betweenness centrality score of a node—or edge—would imply a higher level of importance within the network and thus, potentially a lower availability of alternative roads in case of a cut-off. However, betweenness centrality has been criticized as overly simplistic [35] and extensions of the approach have been suggested to consider origin–destination distribution [36] or node importance within the network [37]. One important aspect that has so far not been adequately considered is the edge betweenness

centrality with respect to critical infrastructure and population distribution. Most studies consider road networks in their globality and do not differentiate with respect to the usage or specific destination. In most cases, important facilities such as health centers and hospitals are not homogeneously positioned within the network and a low criticality assessment may hide some specific usage disparities if, for instance, the health facility is in an isolated part of the network. Moreover, betweenness centrality is directly connected to the network topology and the density of its nodes. Thus, if the road network is not completely mapped or if the repartition of nodes is not correlated with the real network (i.e.: density of nodes differs from density of population nucleus), the betweenness centrality score will be biased. Furthermore, the analysis of betweenness centrality remains limited due to its high computational performance requirements [38]. A focus on targeted usage of the network would reduce the computational requirements and thus allow a more extensive area of analysis. To overcome those issues, we modified the edge betweenness centrality analysis to propose and test a road criticality indicator.

As geodata for most parts of the global South is sparse, one has to consider the completeness of the road network data as an important factor of uncertainty. OpenStreetMap (OSM), as an open source geodataset provided by volunteers, is often the best available data source for many regions and is an important data source for the analysis of accessibility and the characteristics of road networks. However, the quality of OSM, as with most volunteered geographic information (VGI), is spatially heterogeneous [39, 40]. Therefore, it is necessary to assess data quality for the case study region. In the absence of external reference data of a higher quality, one has to rely on intrinsic data quality assessments. The different aspects of data quality are thereby estimated by an analysis of the history of OpenStreetMap [41–43]. Moreover, there is generally an unquantifiable time offset between changes of objects in reality and the survey of these changes into OSM.

We selected the case study of Cyclone Idai as a severe event in terms of the number of people affected, the area devastated, and the magnitude of international response. The aims of our study are twofold:

1. Identifying the most appropriate method to assess potential access to healthcare and to identify vulnerable populations in the aftermath of a natural disaster based on open data.
2. Assessment of a modified version of betweenness centrality indicator to assess road infrastructure criti-

cality and support preparedness and mitigation plans of disaster-related loss of healthcare accessibility.

### **Case study: Cyclone Idai**

The UN's World Meteorological Organization declared Cyclone Idai as “one of the worst weather-related disasters in the southern hemisphere” [44]. The cyclone impacted the southeastern coast of Africa in March 2019 (Fig. 1). Between the 4th and 21st of March, it made landfall twice causing tremendous damage in Mozambique, Malawi, and Zimbabwe, affecting over three million people [45]. Furthermore, at least 45 healthcare centers were partially or totally destroyed in Mozambique [46].


During the first days after the passing of Cyclone Idai, hundreds of humanitarian organizations and international agencies activated their emergency response systems to provide first aid to affected populations and to prevent epidemic outbreaks, such as cholera. The needs assessments and the effective division of relief efforts by actors was challenged by the lack of contextual knowledge of the area as most of intervening organizations did not have a permanent presence prior to the event [47, 48].

## **Methods and data**

### **Data availability and completeness**

To compare different methods, we used open access data on the road network and health facilities, demographic, and administrative data as well as remote sensing-based flood masks. For the raster-based accessibility analysis, a friction surface representing the travel time per cell of a tessellation was provided by the Malaria Atlas Project [49]. It was calculated as a function of street presence and street characteristics, land use, and terrain.

The flood extents were provided by two different datasets which focused on complementary areas. Both were combined in a vector layer and used as the flood mask for the following analysis steps. To lower the computational burden, the geometries were simplified using the Visvalingam algorithm [50] with only one percent of points retained. The first flood extent dataset was based on results published by the World Food Program [51] on the 21st of March, four days after the end of the cyclone. The flood extent was retrieved from a 22 km resolution microwave radiation satellite imagery from SSM/I, AMSR2, and GMI sensors and downsampled with a DEM to a 90 m resolution raster dataset [52]. The images were acquired on a daily basis between the 12th and the 20th of March 2019 and aggregate the extent of the detected floods. The second dataset was published in vector format on the 26th of March 2019 by UNOSAT [53] and

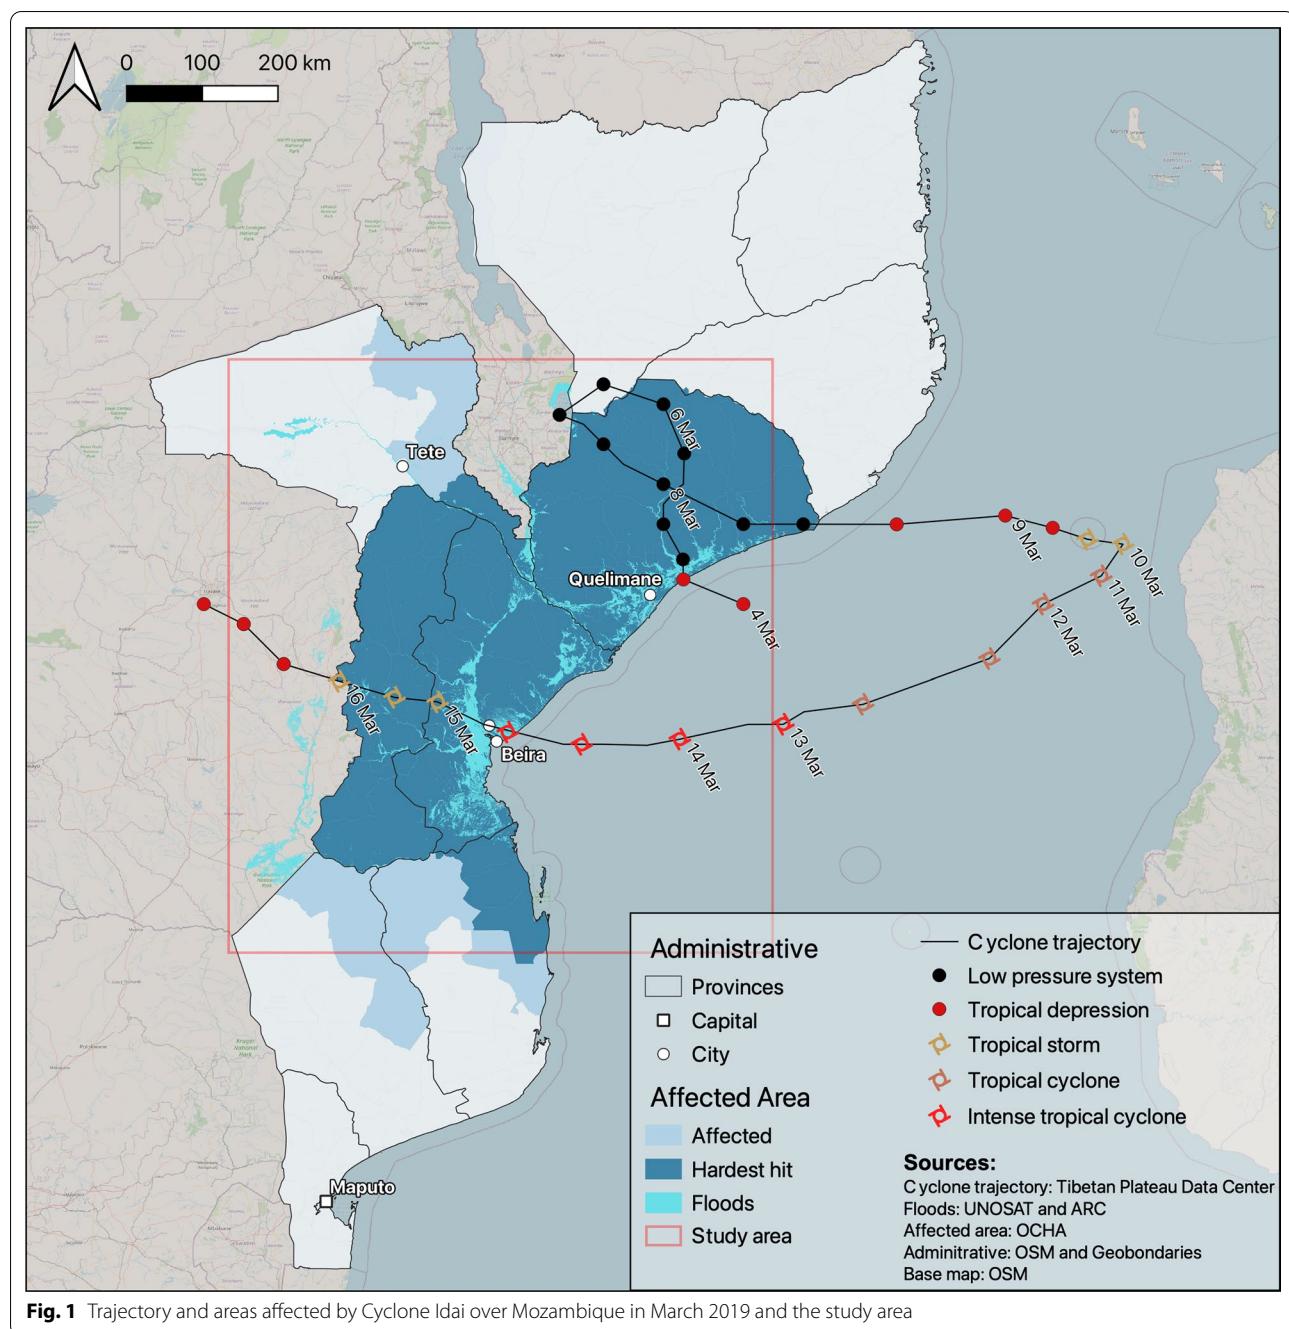

was acquired by the Sentinel-1 radar sensor with a resolution of 10 m. The product presents the cumulative floods detected on the 13th, 14th, 19th, 20th, and 26th of March. The whole analysis was restricted to the extent of Mozambique, using the administrative boundary from geoboundaries.org [54].

To assess quantitatively the vulnerabilities of the population regarding healthcare accessibility, we extracted population counts from a raster dataset by worldpop

[55]. Worldpop [56] provides several datasets of gridded population counts with a 100 m resolution. We used the 2020 constrained top-down method adjusted with UN population estimates for Mozambique.

Road network and health facility data were obtained from OpenStreetMap. As the completeness of the dataset is dependent on volunteer contributions and increases over time, we used the latest extract available at the moment of the analysis in April 2021. The road network

was extracted from Geofabrik.de [57]. For the analysis of the flood event, we used the tool Osmosis [58] to simulate the road network alteration due to the flood. All nodes of the road network that were intersecting with the flood mask were removed. The healthcare facilities were obtained via the ohsome API [59]. We considered 1059 healthcare facilities recorded in OpenStreetMap for Mozambique, including any OSM object that bears a healthcare function no matter the level, such as primary, secondary and tertiary facilities.

The acquisition of the OSM dataset at the time of the analysis instead of the time of the event represents a potential bias. To assess this bias and verify the data quality, we performed an intrinsic data quality approach. We accessed the OSM history to assess the evolution of the dataset over time on relevant features. We used Ohsome API [59] to filter the contributions on specific highways (*highways=motorway, trunk, primary, secondary, tertiary, unclassified, track, path*) and all health facilities that can provide primary health care (*amenity=clinic, health\_post, doctors, healthcare=doctors, clinic, midwife, nurse, center*) including also hospitals (*amenity=hospital, healthcare=hospital, building=hospital*). Additionally, we analyzed the evolution of user activities on these features. A sudden increase in the mapped features in the flooded area in the wake of the cyclone would give an insight into the lack of data completeness at this time and the activation of remote mapping campaigns to address it. On the contrary, a sudden decrease in user activities would illustrate a drop in the interest in mapping the area (Fig. 1).

After the disaster, the total length of mapped roads increased substantially in the flooded regions (Fig. 2). At the time the cyclone hit, around 80,000 km of roads were mapped, while mapped road length increased by a factor of 1.9 to almost 150,000 km in the following months. For the rest of the country the increase was much lower (from 90,000 km to 105,000 km, an increase by a factor of 1.2). Regarding health facilities, few primary facilities were present in the OSM database prior to the disaster while several hundred were added in the following weeks all over the country. The history of OSM user activity showed a peak followed by a quick drop-off during the humanitarian response in April 2019. We interpret this as a fading of interest and the end of the OSM community mobilization. Therefore, the contributions plateauing in the flooded regions could either result from the completeness of the database or from the end of mapping activities triggered by the disaster.

In Additional file 1, we present more in depth data completeness assessment, including a proxy measure based on external dataset and the field observations from a humanitarian field worker.


### Loss of healthcare accessibility analysis

Our analysis estimated the potential access to health facilities, the loss of accessibility and the impacted population by a loss of accessibility. The potential access to healthcare analysis was run independently in both flooded and normal conditions. Both were then compared based on their geometrical difference (see Additional file 2: Fig. S3 for detailed workflows). Thereby, we identified the areas which experienced a loss of accessibility to health facilities. Using the worldpop dataset, we finally estimated the number of inhabitants by access time under both conditions and in the areas experiencing a loss of accessibility. The results allowed us to measure the impact of the floods on the accessibility of the population to health facilities.

The healthcare accessibility analysis was done with both network- and raster-based methods and their results were compared to identify the most appropriate approach depending on the contextual characteristics. The literature on healthcare accessibility tends to focus on a transportation mode based on motorized vehicles. Nevertheless, in many Sub-Saharan countries, including Mozambique [60], walking remains the main means of transport especially in disaster situations and in rural areas. Therefore, we considered both transportation profiles.

The estimation of accessibility with a network-based approach was based on isochrones [61] which represent the area accessible from one point within a given time. The isochrones were calculated for the 1059 health facilities in Mozambique using the openrouteservice API [62]. Openrouteservice is a free of cost routing engine available as open source software which can also be used as a service via openrouteservice.org. It uses OSM road network data to build a weighted graph according to road categories, speed limits, and traffic restrictions. Hence, the calculation was restricted to road segments and did not consider open space routing for areas not connected by the road network. We calculated isochrones based on the time required to reach the nearest health facility. We used 10 min intervals capped to a maximum of one hour for the driving-only profile. For the walking-only profile, we also considered 10 min intervals which were then aggregated by hour to a maximum of six hours. As the loss of accessibility calculations rely on the difference in travel times and the geometric differences between the respective isochrone polygons, it resulted in potential precision error. This potential error was equal to the time interval (10 min).

The raster-based method calculates a least-cost path on every pixel of the raster grid to access the same healthcare facilities. The algorithm is based on a friction layer that attributes a time cost to cross a pixel. We used a

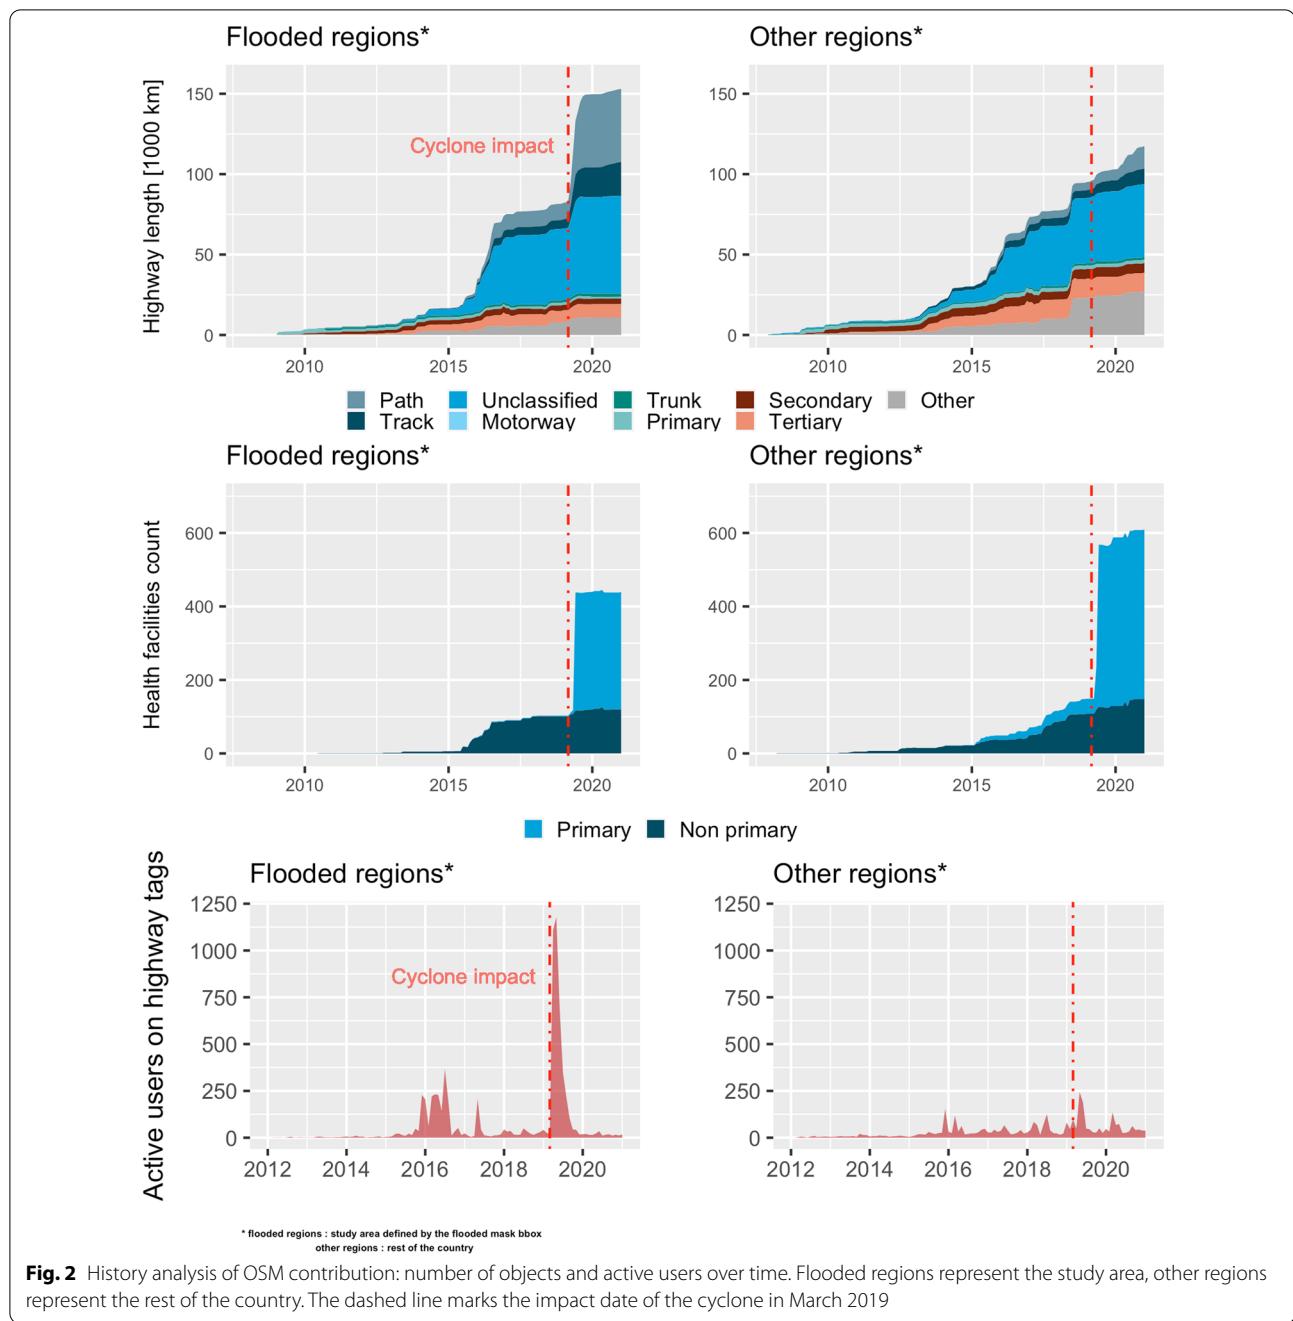

walking-only friction layer as well as a friction layer combining walking with motorized transportation where road and train information is available. The friction layer integrated data on land cover, therefore the calculation was not restricted to the road network and considered travel on any surface with an adjusted speed. The gDistance (see Additional file 2: Table S1) R package was used to compute the least-cost path. In this approach, we altered the cost of the flooded areas to NA values to

forbid travel. The continuous result was categorized into time intervals (10 min) to allow a comparison with the network-based approach.

#### Road criticality analysis

The analysis of the road criticality requires a graph representation of the network. We used openrouteservice [62] to export the weighted graph. To measure road criticality we developed a modified version

of the edge betweenness centrality [63], the targeted edge betweenness centrality (TEBC) indicator. Instead of considering the shortest paths between all possible pairs of nodes in the network (as for edge betweenness centrality), the TEBC calculates the road segment usage frequency among the shortest paths between targeted destination points (in our application healthcare facilities) and departure points of the area of interest (Eq. 1). The departure points were set as population nuclei and were computed from the centroid of the cells of the worldpop dataset after aggregation to a 1 km grid. For each population nucleus, the targeted destination points were selected within a buffer zone of 20 km. This filter implied the assumption that a person has an uniform probability to visit any of the destination points within the buffer zone. To avoid any bias due to the heterogeneity of the destination density, the frequency was weighted by the number of destinations accessible from each departure point.

$$TEBC(i) = \sum_{s,d_s} \frac{g_{sd_s}^i}{N_{d_s}} \quad (1)$$

where  $i$  is the specified segment of the network,  $s$  is one of the departure points,  $d_s$  is the destination points within the range of  $s$ ,  $g_{sd_s}^i$  is equal to 1 if the shortest paths between  $s$  and  $d_s$  passes through  $i$  and 0 otherwise,  $N_{d_s}$  is the number of destinations  $d_s$  within the range of  $s$ . The calculation of shortest paths was done with the R package sfnetworks.

Segments with higher TEBC scores are more frequently crossed. A similar TEBC score for all segments indicates a lower overall road criticality level within the network as there are many alternatives to any road disruptions. On the contrary, a wider range of TEBC scores indicates a stronger vulnerability of the network as the loss of one main axis could isolate parts of the network.

The TEBC was calculated for the road network for both normal and flooded conditions. For the flooded case, road segments inside the flood masks were not considered. The scores for both cases were then compared. For a single road segment, a decrease in the TEBC score after flooding indicates higher criticality as it is not able to provide access due to the floods. In a network with a *hub-and-spoke* topology [64], these criticalities could result in a lack of resilience if no mitigation action is taken, such as flood walls. On the other hand, an increase in the score would identify the segment as an important backup road. Such roads should get special attention in disaster preparedness plans as they have major importance in disasters.

## Software and data

The data processing was done with R 4.0.5 [65]. The scripts and documentation are available in open access. In addition, the complete list of used R packages is available in the Additional file 2: Table S1. Osmosis was used to remove the OpenStreetMap data within the extent of the floods. Openrouteservice was installed locally using Docker [66]. The maps were created with QGIS 3.18 [67].


## Results

### Loss of healthcare accessibility analysis

With the analysis of potential access to healthcare facilities, we observed the localization of all the populations affected by the floods. We were able to identify the population nuclei affected, even though they were not in the direct vicinity of the floods (Fig. 3).


The results of the raster-based and network-based methods differed remarkably with respect to the estimated potential access time (Fig. 5). For the walking-only profile the raster-based and the network-based approach estimated 3.01 million (9.61% of the country population) and 14.76 million inhabitants (47.23% of the country population) respectively that lived beyond walking distance (more than six-hours walking) of the nearest health facility under non-flooded conditions. The results were similar for the car profile with 4.52 millions inhabitants (14.46% of the country population) living beyond driving distance (more than 1-h driving) estimated by the raster-based approach and 14.15 millions inhabitants (45.29% of the country population) estimated by the network-based approach.

Considering the loss of potential access by estimating the increase in travel time to reach the closest healthcare facility after the floods, the two methods also differed by a significant degree (Fig. 4). According to the raster-based approach, a total of 1.03 million (3.29%) inhabitants experienced an increase in walking time compared to 0.59 million (1.88%) according to the network-based method. Moreover, the distribution of the population experiencing a loss of accessibility by time range differs between the methods. The raster-based method estimated that half (50.8%) of affected inhabitants experienced an increase in walking time less than five walking hours while the network-based method estimated that the majority (65.59%) of inhabitants experienced a more dramatic increase in walking time (more than five hours). When considering motorized transportation, the results of the analysis were similar with an estimated total of nearly 0.8 million (2.56%) inhabitants experiencing an increase in driving time with the raster-based approach and close to 0.53 million (1.68%) inhabitants with the network-based

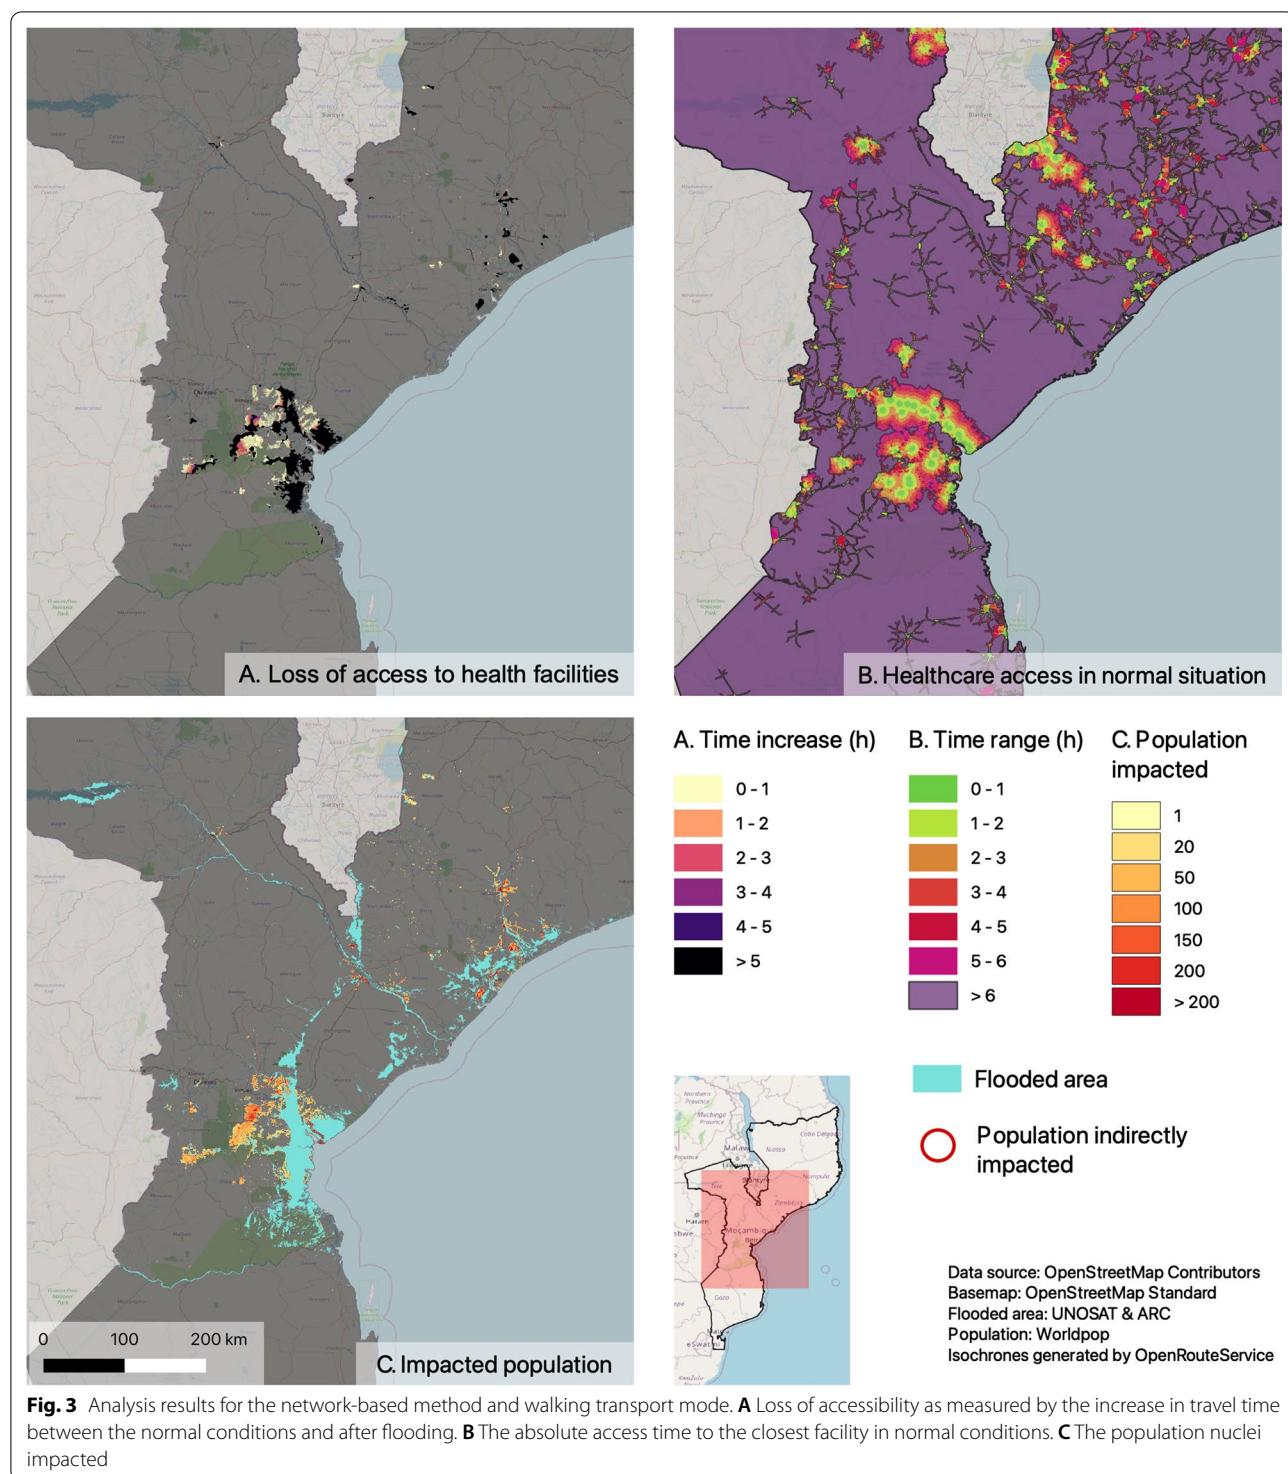

approach. Both approaches estimated that the majority of the affected population experienced an increase in driving time of more than 50 min (67.2% for the raster-based approach and 71% for the network-based approach).

We compared the size of the areas (see Additional file 2: Fig. S4) within a six-hour walking range to healthcare facilities for both the raster- and the network-based approaches. It covered respectively 8.8% ( $69,164 \text{ km}^2$ ) of the country surface for the

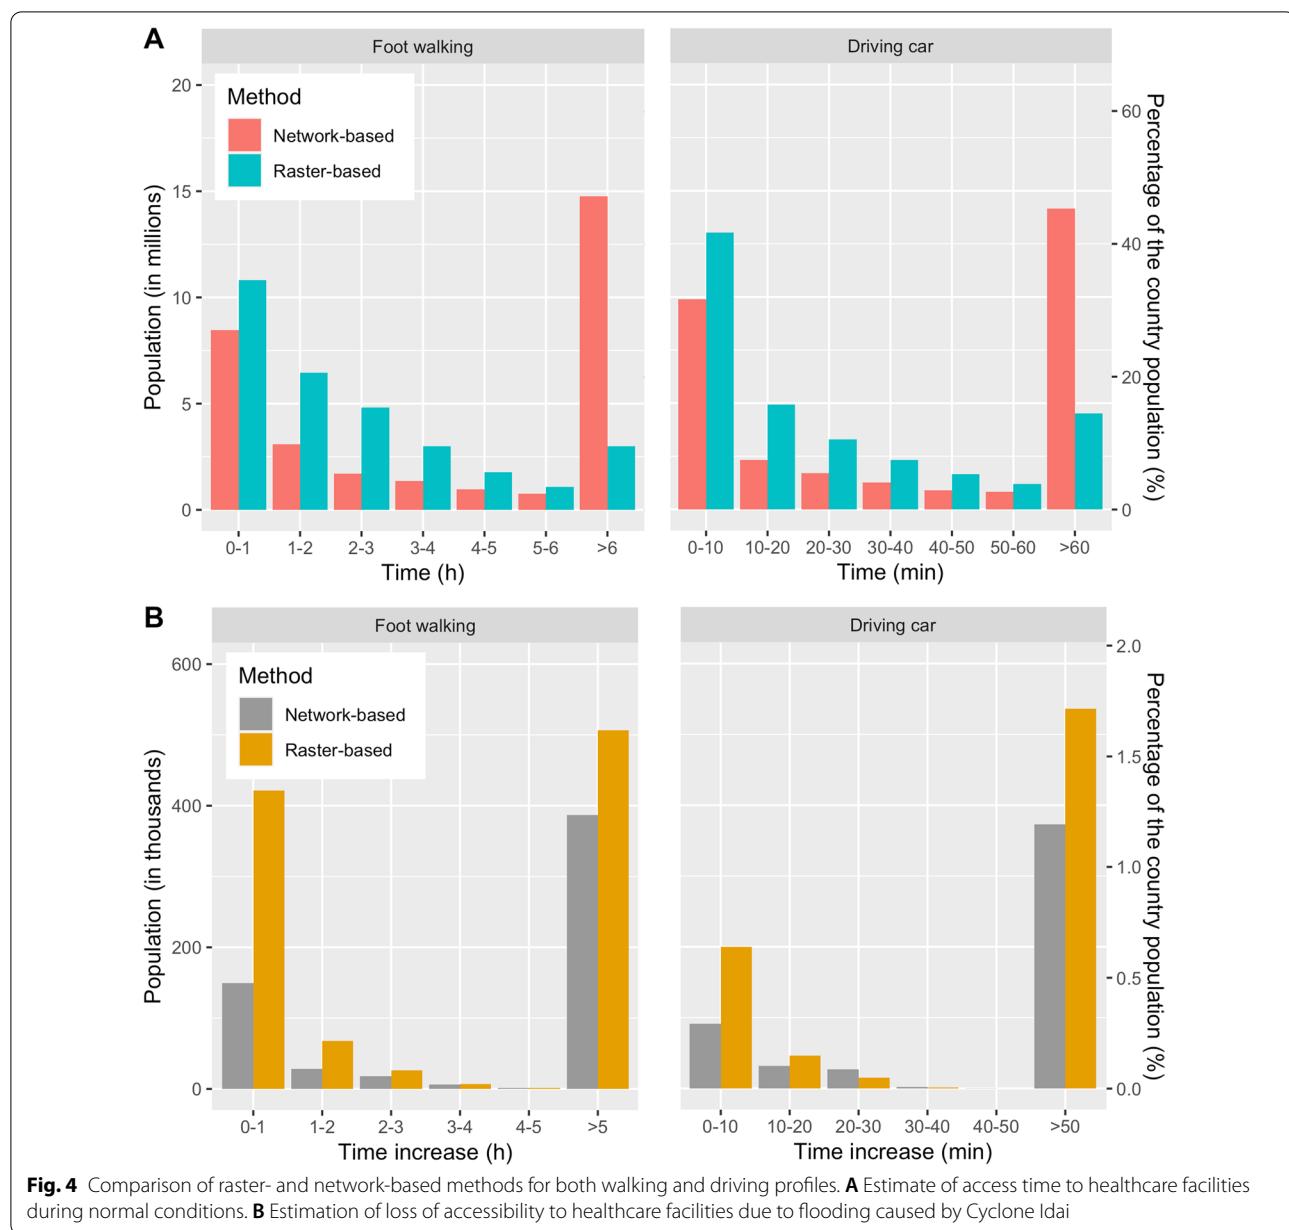


network-based approach and 64.6% (507,516 km<sup>2</sup>) for the raster-based approach. As expected, the shape of the network-based accessibility closely followed the presence of the road network, while the raster-based accessibility assembled a buffer-like shape around health facilities with a much wider extent. The network-based approach represented accessibility at a much finer spatial resolution in areas with a higher road network density such as the urban areas of Dondo and Beira in Sofala province (see Additional file 2: Fig. S5).

#### Road criticality analysis

In the focus area that we investigated, the flood reduced the number of usable road segments (Fig. 5). The targeted centrality score decreased due to flooding for most road segments but a few increased in centrality. This demonstrates the importance of backup routes for accessing health facilities.

While some of the road segments had high centrality scores both for normal and flooded conditions, other major roads experienced a reduction in their centrality scores or even a reduction to zero if flooded. Access

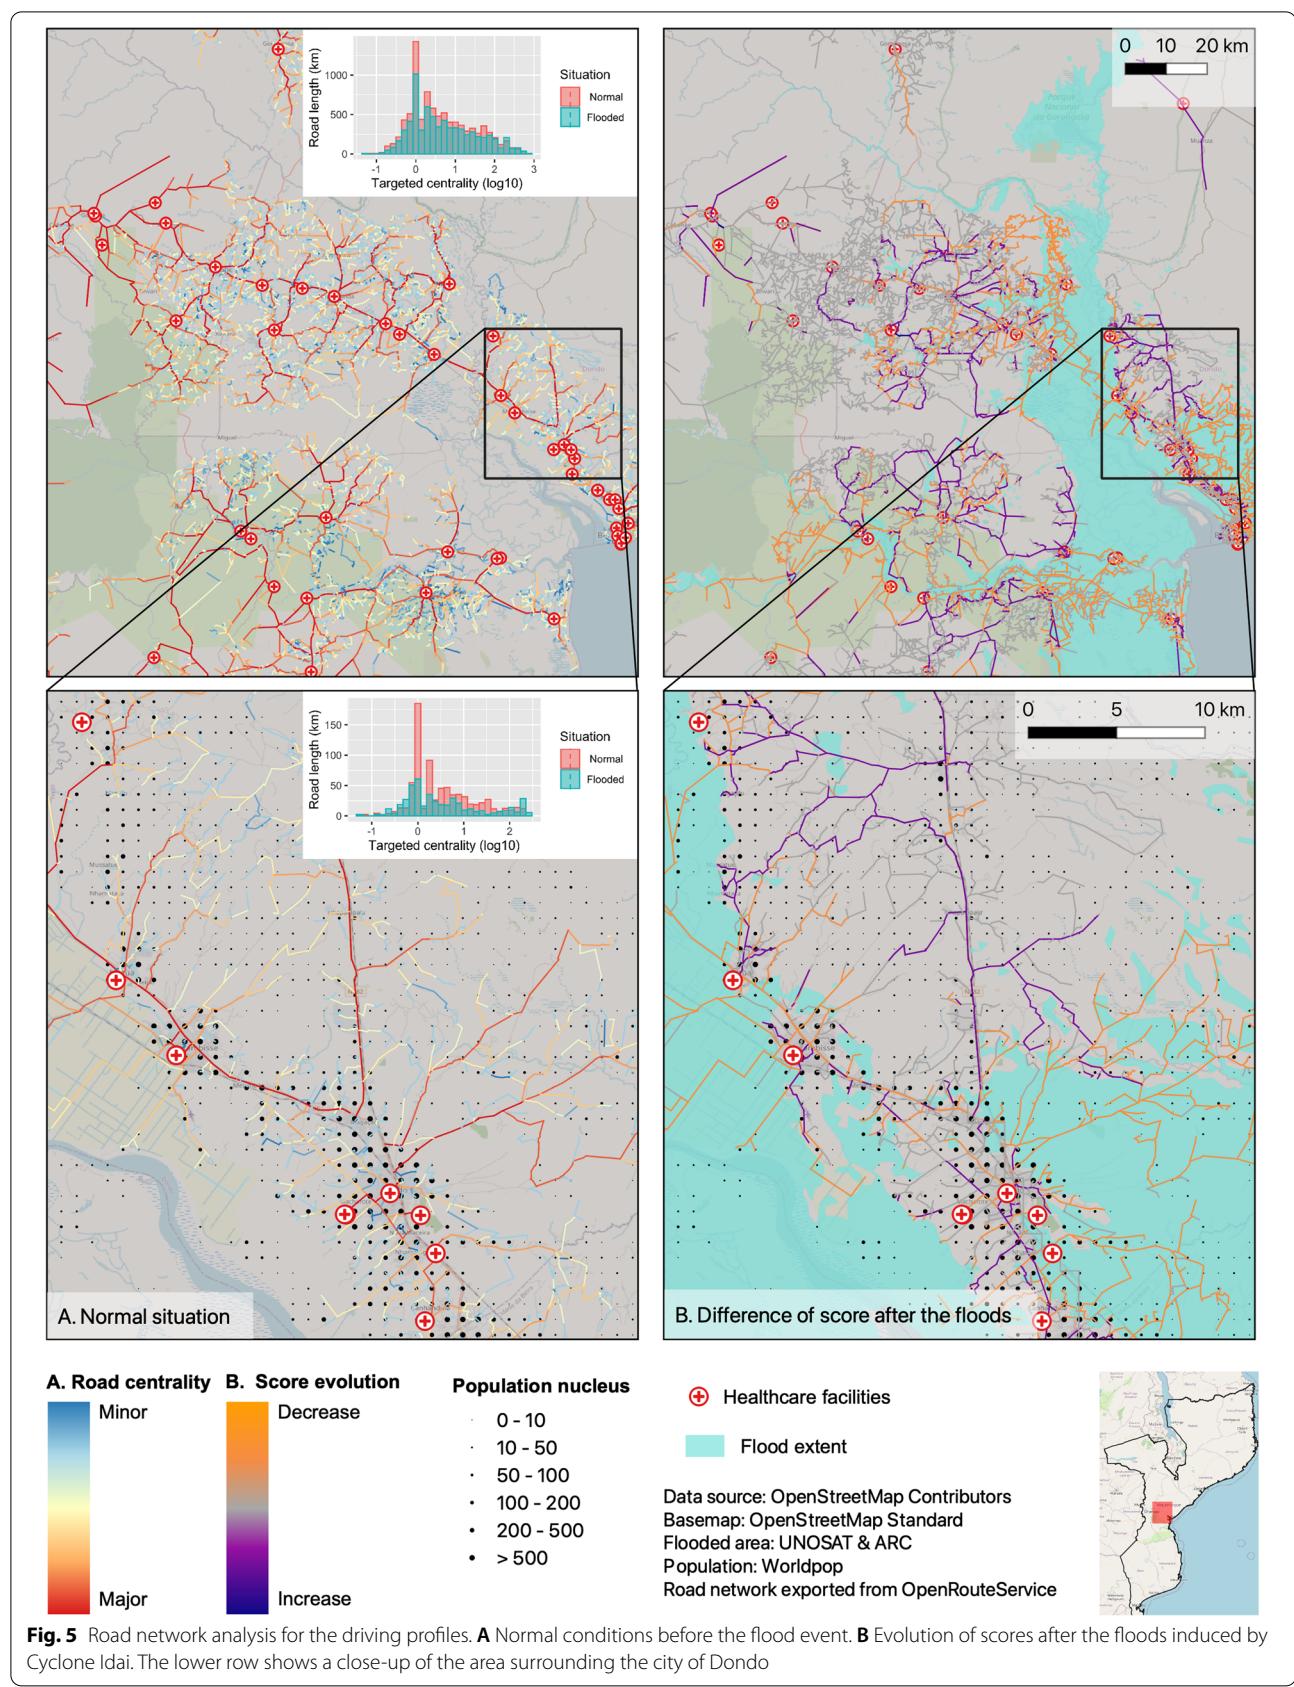

to health facilities should avoid these road segments. If drivers follow previously known routes this would lead to a further reduction in accessibility. A select number of road segments with low or medium centrality scores during normal conditions increased in targeted centrality after the flood event. These road segments could act as backup roads in the case of a flood event if the main roads are not operational. If they were used after such a flood event they could help to avoid a total loss of accessibility for parts of the population even though access time to health facilities would increase considerably.

## Discussion

### Data availability and completeness

In general, we recommend performing an intrinsic data quality assessment for OSM based data since the accessibility results and the targeted centrality analysis depend on the quality of the health facility locations. For the network approach the quality of the road network is also highly relevant. We acquired OSM data from April–May 2021, two years after the disaster. Therefore, the OSM data might be partly inaccurate. However, we can assume that the additionally mapped features represent features that existed already some years ago as the intrinsic data quality assessment revealed that the region was only incompletely mapped. Especially as the remote mapping campaigns launched after the event led to a significant increase in mapped features which are unlikely to have been constructed after the event.

The use of Ohsome Quality Analyst (see Additional file 1) indicators such as the comparison of OSM features and population density can provide an approximation of the completeness of the OSM dataset. Nevertheless, we were only able to compare buildings and population densities. The use of indicators comparing road length density and population density would be better proxies in the future to assess the completeness of the road network. The use of such indicators could then support the decision on the most suitable accessibility method. The results of the OSM data quality and completeness confirmed the choice of using recent data as the available data at the time of the cyclone would have been inadequate for ensuring relevant accessibility and road criticality analysis.

After a disaster event, many infrastructure elements might have been damaged or destroyed. While it is possible to map such damage in OSM, this is not frequently done. This might have led to an optimistic estimation of accessibility to healthcare facilities. We therefore strongly recommend to use field observations for cross-validation where possible. For our case study, an exhaustive and reliable list of damaged health facilities was not available. We assumed that all facilities remained fully operational after

the disaster which, is a known limitation of the workflow as shown by the observation of the humanitarian field worker (see Additional file 1: Fig. S2) and the post-disaster assessment report [68].

As identified in the OSM data completeness analysis, the healthcare facilities list within OSM might not be complete as well as the classification accuracy of healthcare facilities cannot be guaranteed. If such data issues are indicated by an intrinsic data quality assessment, it might be worth considering the use of complementary datasets such as the list of health facilities in Sub-Saharan Africa published by the World Health Organization [69] or a combination of several datasets as provided by Afri-mapr [70].

### Loss of healthcare accessibility analysis

According to OCHA [45], Cyclone Idai affected around 1.85 million people. Nevertheless, Cyclone Idai had variable impacts across these populations: loss of shelter, increased food insecurity, increased need of WASH services, and loss of accessibility to healthcare, but no disaggregated figures were published. Our network-based and raster-based analysis, respectively, found an estimated 0.59 million and 1.03 million persons experiencing a loss of accessibility to health facilities. Taking into account the limitations of our methods, discussed below, these results are coherent with official numbers.

Our analysis indicated some limitations for both the network-based and the raster-based approaches, which should be considered when selecting an approach for different use cases (see Table 1).

The main limitation of the network-based method was the completeness of the road network. All areas not reached by a road in the network model will be considered out of range, while the raster-based method will consider open space routing. This limitation explains the difference between the two approaches (see Additional file 2: Fig. S4). The network-based estimation of the number of inhabitants living beyond a walking distance of six hours to the nearest health facility is presumably overestimated compared to the raster-based approach. Therefore, in areas with low network density—specifically if the network is not sufficiently mapped—the network-based approach will tend to overestimate the time required to access health facilities. Other more complex network methods like two-step floating catchment would suffer the same trade-offs in data quality. In such contexts, the use of a raster-based approach with a friction layer from the Malaria Atlas Project may provide more accurate results. A potential solution is the fusion of raster layers provided by both approaches—e.g. by picking the lower value of estimated travel time.

**Table 1** Comparison of network- and raster-based methods with open data

	Network-based	Raster-based
Critical datasets	OSM network	Friction layer
Dataset update frequency	<b>Daily</b> The scope of a daily dataset update is not known as it is based on VGI	<b>No info available</b> Last update: 2020
Data incompleteness exposure	<b>Very high</b> The calculation is only based on the road network, thus the analysis is limited by the completeness of the mapped network	<b>Medium</b> Friction layer construction mitigates the lack of road network completeness
Spatial resolution	<b>100 m</b> Area extent is a vector geometry and thus does not have resolution limitations. Population datasets were available at a 100 m resolution	<b>1 km</b> Friction layer was available at a 1 km resolution
Time resolution	<b>Time intervals</b> The loss calculation cannot retrieve loss of access time within the same time range. Time intervals may be reduced to increase the number of time ranges but this would increase the computation time	<b>Limited by cell size</b> According to Nelson [71], travel speed on tracks for motorized vehicles is 10 km/h and walking speed on bare ground is 2.5 km/h. Considering the granularity of the cell the time resolution would be 6 min for motorized vehicles and 24 min for walking
Computation time	<b>~3.5 h</b> The main time consuming step was the isochrones processing	<b>~1 h</b> The main time consuming step was downloading the friction layer

On the other hand, the network-based method does not suffer from the fixed raster resolution (see Additional file 2: Fig. S5). In areas with high levels of completeness and accuracy of the OSM network, the network-based approach can be considered more accurate. As OSM data is updated continuously it can be expected to increase in completeness and accuracy and to also reflect new road construction work in a timely manner. The friction layer used by the raster-based approach is not automatically updated. As of September 2021, there has been only one release for the walking friction layer and a 5 year update interval for the motorized friction layer. For future research, our work provides insight into the creation of a workflow to update friction layers with the latest available main input datasets: road network, land cover, and elevation.

The assumptions of the network-based approach need to be discussed critically: We analyzed walking and driving as separate means of transport. However, it has to be assumed that multimodal transportation (walking and moto-taxi) is not uncommon in the case study region. Therefore, our method is likely to overestimate or underestimate the impacted population respectively for walking-only and driving profiles. The development of tools for a multimodal analysis could improve the precision of the results. Technically, the weighted graph used by openrouteservice builds on the type of highway registered in the OSM dataset. The walking-only profile

considers any road class with the avoidance of unsafe highways. Therefore, we recommend the introduction of a new profile considering motorized vehicles on highways which allow driving and walking otherwise. The motorized friction layer used in the raster-based method provides a basic estimation of multimodal transport as it assigns an adjusted walking speed on open spaces without road access. Nevertheless, an adequate multimodal analysis would require prior knowledge of the modal behavior of the study area. Such information was not available for Mozambique and is generally difficult to acquire for large parts of the Global South, specifically for rural areas.

Our work also provides an insight for future analysis on the accessibility to healthcare facilities for other kinds of natural and man-made disasters with the prerequisite of the availability of disaster datasets.

Our case study demonstrates the feasibility of an accessibility analysis workflow in identifying the vulnerability of populations to the loss of accessibility to healthcare after a disaster of the magnitude of Cyclone Idai. We showed the potential support that such analysis could provide to operational decision making by governmental agencies and humanitarian actors:

- The rapid identification of populations experiencing a loss in accessibility to healthcare could help operational actors with deciding where to focus their interventions.

- In disaster contexts, where actors are not familiar with the area and information on population distribution is not easily available, our workflow enables rapid identification of population nuclei and mitigates the risk of overlooking areas due to a lack of information. Therefore, it could be integrated within a needs assessment protocol.
- The analysis also allows for identification of indirectly impacted areas and inhabitants that may not have been identified otherwise. As even if the floods did not occur in these areas, they impact access to healthcare facilities.
- Moreover, these analyses may be used for preparedness plans by providing a simulation tool to assess the potential impact of future disasters. The extent of historic floods or the extent of flood risks could then be used as input for the disaster context situation.
- Also, these analyses are relevant to be used to identify the remoteness of populations and their vulnerability to accessing healthcare regardless of the circumstances.

### Road criticality analysis

Our centrality analysis showed the relevancy of the targeted edge betweenness centrality indicator in assessing critical road segments in a network for populational access to healthcare facilities. This indicator mitigates the limitations of more classic centrality indicators:

- The destination of the road network can easily be defined to a list of points such as healthcare facilities. We can also imagine other relevant use cases such as tsunami or earthquake evacuation roads.
- By default, we used the  $1 \text{ km}^2$  aggregated population nuclei as origins for the road networks. These points can be modified to adjust the resolution of population nuclei or to set other origin points.
- Finally, as the origin and destination points can be adjusted and are fewer than the network's nodes, the computation time is reduced and enabled to widen the area of interest.

As it enables the identification of road segments prone to blockage due to flooding as well as the main backup roads in such a situation, this analysis can support decision making for disaster preparedness planning or defining evacuation roads.

However, the flood mask is not free of uncertainty due to its spatial resolution and the update frequency. The flood mask indicates presence of water but cannot tell if a road is passable. For instance, shallow flooding might be passable at slow speeds. Frequent updates of the road

status, e.g. based on feedback by drivers or volunteers, could resolve this issue. Another critical point of our set-up is the intersection of the road network with the flood layer. Currently, a road segment is considered flooded if one of the nodes intersects the flood mask. If the road segment in between two nodes intersects the flood mask but the two nodes do not, the road segment would be considered as not flooded. This could lead to errors, especially if the road segment has a high centrality score.

Also, the centrality analysis does not provide any information regarding the capacity of the road segments to face an increase of traffic. Hence, it is not possible to consider potential traffic congestion. However, the approach highlights roads that are critical for access to health sites given the effects of a potential disaster event. These roads qualify for a real world assessment of their capacity. Potential bottlenecks could thereby be identified and prioritized for upgrading by national and international actors.

During emergency responses, one may argue that any intervention should be maximizing the number of people reached. If such a strategy is pursued, the targeted centrality could be adapted to a population-weighted indicator. This indicator would give higher importance to departure points with larger populations. Therefore, it must be handled carefully as it presents an inequitable result. Remote population nuclei, who are likely to already face lower accessibility to healthcare, risk becoming invisible. Therefore, this population-weighted indicator should not be used by default but should be justified by operational decisions.

### Conclusion and outlook

Organizing the different phases of the disaster management cycle and its consequences toward accessibility to health facilities requires information on the vulnerabilities of populations and critical infrastructure. In many regions of the Global South, available data is often scarce and contradicts with the reactivity required by emergency responses or with the available resources to define preparedness and mitigation plans. We have demonstrated that the use of geospatial analysis and open access data can help to resolve these challenges. In regions where the OSM road network is incomplete, the raster-based approach built on open data such as the MAP layer should be preferred. If the OSM road network is sufficiently complete, the network-based approach offers a higher spatial resolution for road-based modes of transport. As open space routing is not represented in the network-based approach, it should be combined with the results of the raster-based approach. For areas with sufficient completeness of the OSM road network the *targeted edge betweenness centrality* indicator provides

important information to assess the criticality of the road in providing physical access to health facilities. Furthermore, it allows the identification of the most critical and the main backup roads.

Further work is needed to test the applicability of the targeted edge centrality centrality indicator in the context of different disasters and geographical contexts. Furthermore, we encourage future research to focus on the construction of a multimodal network-based approach and the combination of raster- and network-based methods to overcome their respective limitations.

In addition, future work is encouraged towards the automatization of network and raster analysis. From our perspective, one of the more important next steps is the management, editing, and sharing of flood extents. Further, automatization of the workflow is essential for the testing of these approaches with relevant humanitarian actors.

## Supplementary Information

The online version contains supplementary material available at <https://doi.org/10.1186/s12942-022-00315-2>.

**Additional file 1:** Data availability and completeness. **Fig. S1.** Indicator comparing population building densities from Ohsome Quality Analyst to evaluate the completeness of OSM data. **Fig. S2.** Comparison of mapped health facilities in OSM with field observation: facilities inventory, localisation comparison and damages inventory.

**Additional file 2: Fig. S3.** Accessibility workflow: raster- and network-based methods. **Fig. S4.** Accessibility to health facility, raster- vs. network-based method comparison A. Under six hours walking time to access healthcare estimations between raster- and network-based methods and B. mapped infrastructures. **Fig. S5** Accessibility to health facilities in urban context, raster- vs. network-based method comparison A. population estimation B. extent of under 6 walking hours access to health facilities. **Table S1.** Comparison of mapped health facilities in OSM with field observation: facilities inventory, localisation comparison and damages inventory.

**Additional file 3:** Performance and computational environment.

## Acknowledgements

The authors thank the development team of openrouteservice for their support and reactivity in developing additional functionalities for this study.

## Author contributions

SP developed the scripts used for this study, analyzed and interpreted the results and was a major contributor in writing the manuscript. MR provided technical supervision in script development and study methodology, analyzed and interpreted the results and contributed in writing the manuscript. SL critically reviewed the methodology and results of the study and contributed in writing the manuscript. AZ and CH reviewed the manuscript. All authors read and approved the final manuscript.

## Funding

The work presented in this paper has been funded by the Klaus Tschira Foundation.

## Availability of data and materials

The dataset(s) supporting the conclusions of this article are available through the scripts in the GitHub repository, <https://github.com/GIScience/healthcare-access-ida>: Project name: Healthcare accessibility and road criticality during

floods disaster. Programming language: R. Other requirements: GDAL 3.2.1, PROJ 7.2.1 and GEOS 3.9 or later

## Declarations

### Ethics approval and consent to participate

Not applicable.

### Consent for publication

Not applicable.

### Competing interests

The authors declare that they have no competing interests.

### Author details

<sup>1</sup>GIScience department, Institute of Geography, Heidelberg University, Heidelberg, Germany. <sup>2</sup>Heidelberg Institute for Geoinformation Technology gGmbH (HeiGIT), at Heidelberg University, Heidelberg, Germany.

Received: 22 July 2022 Accepted: 19 September 2022

Published online: 12 October 2022

## References

- IPCC. Climate change 2021, The physical science basis, Summary for Policymakers. IPCC; 2021. [https://www.ipcc.ch/report/ar6/wg1/downloads/report/IPCC\\_AR6\\_WGI\\_SPM.pdf](https://www.ipcc.ch/report/ar6/wg1/downloads/report/IPCC_AR6_WGI_SPM.pdf). Accessed 10 Sep 2021.
- Wallemacq P, Belov R, Delbiso T, House R. The human cost of weather related disasters 1995–2015. CRED, UNISDR; 2015. [https://www.unisdr.org/2015/docs/climatechange/COP21\\_WeatherDisastersReport\\_2015\\_FINAL.pdf](https://www.unisdr.org/2015/docs/climatechange/COP21_WeatherDisastersReport_2015_FINAL.pdf). Accessed 10 Sep 2021.
- Managing the risks of extreme events and disasters to advance climate change adaptation: special report of the intergovernmental panel on climate change. Cambridge: IPCC; 2012. [https://www.ipcc.ch/site/assets/uploads/2018/03/SREX\\_Full\\_Report-1.pdf](https://www.ipcc.ch/site/assets/uploads/2018/03/SREX_Full_Report-1.pdf). Accessed 6 Oct 2021.
- Albrecht F. The social and political impact of natural disasters investigating attitudes and media coverage in the wake of disasters. Digit Compr Summ Upps Diss Fac Soc Sci. 2017; p. 143.<https://uu.diva-portal.org/smash/get/diva2:1090236/FULLTEXT01.pdf>.
- Pescaroli G, Alexander D. A definition of cascading disasters and cascading effects: going beyond the “toppling dominos” metaphor. Planet@Risk. 2015;3:58–67.
- Hallegatte S, Rentschler J, Rozenberg J. Lifelines: the resilient infrastructure opportunity. Washington, DC: World Bank; 2019. <http://hdl.handle.net/10986/31805>. Accessed 13 Sep 2021.
- World Health Organization. Managing epidemics: key facts about major deadly diseases. Geneva: World Health Organization; 2018. <https://apps.who.int/iris/handle/10665/272442>. Accessed 13 Sep 2021.
- MSF. Epidemics narrative|MSF. Médecins Sans Frontières (MSF) International. <https://www.msf.org/epidemics-narrative>. Accessed 13 Sep 2021.
- MSF. MSF, the priorities—Check-lists, indicators, standards—situation with displacement of population. Médecins Sans Frontières, Duprestraat 94, 1090, Brussels; 2011. [https://evaluation.msf.org/sites/evaluation/files/the\\_priorities\\_uk\\_2011.pdf](https://evaluation.msf.org/sites/evaluation/files/the_priorities_uk_2011.pdf). Accessed 9 Sep 2021.
- Jafino BA, Kwakkel J, Verbraeck A. Transport network criticality metrics: a comparative analysis and a guideline for selection. Transp Rev. 2020;40(2):241–64.
- Jenelius E, Petersen T, Mattsson LG. Importance and exposure in road network vulnerability analysis. Transp Res Part Policy Pract. 2006;40(7):537–60.
- Anderlini ECG. Practical definition of criticality regarding road infrastructure. Global Initiative on Disaster Risk Management; 2020. p. 20. [https://www.gidrm.net/user/pages/get-started/resources/files/GIDRM\\_Criticality\\_RoadInfrastructure\\_MX.pdf](https://www.gidrm.net/user/pages/get-started/resources/files/GIDRM_Criticality_RoadInfrastructure_MX.pdf). Accessed 6 Oct 2021.
- Coles D, Yu D, Wilby RL, Green D, Herring Z. Beyond ‘flood hotspots’: modelling emergency service accessibility during flooding in York. UK J Hydrol. 2017;1(546):419–36.
- Arrighi C, Pagnolato M, Dawson RJ, Castelli F. Preparedness against mobility disruption by floods. Sci Total Environ. 2019;1(654):1010–22.

15. Siddiq F, Taylor BD. Tools of the Trade? *J Am Plann Assoc.* 2021;87(4):497–511.
16. Guagliardo MF. Spatial accessibility of primary care: concepts, methods and challenges. *Int J Health Geogr.* 2004;3(1):3.
17. Luo W, Qi Y. An enhanced two-step floating catchment area (E2SFCA) method for measuring spatial accessibility to primary care physicians. *Health Place.* 2009;15(4):1100–7.
18. Boisjoly G, El-Geneidy AM. The insider: a planners' perspective on accessibility. *J Transp Geogr.* 2017;1(64):33–43.
19. Weiss DJ, Nelson A, Vargas-Ruiz CA, Gligorčić K, Bavadekar S, Gabrilovich E, et al. Global maps of travel time to healthcare facilities. *Nat Med.* 2020;26(12):1835–8.
20. Hierink F, Rodrigues N, Muñiz M, Panciera R, Ray N. Modelling geographical accessibility to support disaster response and rehabilitation of a healthcare system: an impact analysis of Cyclones Idai and Kenneth in Mozambique. *BMJ Open.* 2020;10(11):e039138.
21. Banick R, Heyns AM, Regmi S. Evaluation of rural roads construction alternatives according to seasonal service accessibility improvement using a novel multi-modal cost-time model: a study in Nepal's remote and mountainous Karnali province. *J Transp Geogr.* 2021;1(93):103057.
22. Geldsetzer P, Reinmuth M, Ouma PO, Lautenbach S, Okiro EA, Bärnighausen T, et al. Mapping physical access to health care for older adults in sub-Saharan Africa and implications for the COVID-19 response: a cross-sectional analysis. *Lancet Healthy Longev.* 2020;1(1):e32–42.
23. Garber K, Fox C, Abdalla M, Tatem A, Qirbi N, Lloyd-Braff L, et al. Estimating access to health care in Yemen, a complex humanitarian emergency setting: a descriptive applied geospatial analysis. *Lancet Glob Health.* 2020;8(11):e1435–43.
24. Denhard L, Kaviani P, Chicumbe S, Muianga C, Laisse G, Aune K, et al. How prepared is Mozambique to treat COVID-19 patients? A new approach for estimating oxygen service availability, oxygen treatment capacity, and population access to oxygen-ready treatment facilities. *Int J Equity Health.* 2021;20(1):90.
25. Klipper IG, Zipf A, Lautenbach S. Flood impact assessment on road network and healthcare access at the example of Jakarta. *Indonesia AGILE GIScience Ser.* 2021;4(2):1–11.
26. Green D, Yu D, Pattison I, Wilby R, Bosher L, Patel R, et al. City-scale accessibility of emergency responders operating during flood events. *Nat Hazards Earth Syst Sci.* 2017;17(1):1–16.
27. Nesbitt RC, Gabrys S, Laub A, Soremekun S, Manu A, Kirkwood BR, et al. Methods to measure potential spatial access to delivery care in low- and middle-income countries: a case study in rural Ghana. *Int J Health Geogr.* 2014;13(1):25.
28. Delamater PL, Messina JP, Shortridge AM, Grady SC. Measuring geographic access to health care: raster and network-based methods. *Int J Health Geogr.* 2012;11(1):15.
29. Ahmadzai F, Rao KM, Ulfat S. Assessment and modelling of urban road networks using Integrated graph of natural road network (a GIS-based approach). *J Urban Manag.* 2019;8(1):109–25.
30. Demšar U, Špatenková O, Virrantaus K. Identifying critical locations in a spatial network with graph theory. *Trans GIS.* 2008;12(1):61–82.
31. Furno A, El Faouzi NE, Sharma R, Zimeo E. Graph-based ahead monitoring of vulnerabilities in large dynamic transportation networks. *PLoS ONE.* 2021;24(16):e0248764.
32. Abshirini E, Koch D, Legeby A. Flood hazard and its impact on the resilience of cities: an accessibility based approach to amenities in the city of Gothenburg, Sweden. 2017.
33. Papilloud T, Röthlisberger V, Loreti S, Keiler M. Flood exposure analysis of road infrastructure—Comparison of different methods at national level. *Int J Disaster Risk Reduct.* 2020;1(47):101548.
34. Freeman LC. A set of measures of centrality based on betweenness. *Sociometry.* 1977;40(1):35–41.
35. Gao S, Wang Y, Gao Y, Liu Y. Understanding urban traffic-flow characteristics: a rethinking of betweenness centrality. *Environ Plan B Plan Des.* 2013;40(1):135–53.
36. Ye P, Wu B, Fan W. Modified betweenness-based measure for prediction of traffic flow on urban roads. *Transp Res Rec.* 2016;2563(1):144–50.
37. Aydin NY, Casali Y, Duzgun HS, Heinemann HR. Identifying changes in critical locations for transportation networks using centrality. In: Geertman S, Zhan Q, Allan A, Pettit C, editors. Computational urban planning and management for smart cities. Berlin: Springer International Publishing; 2019. p. 405–23 ([10.1007/978-3-030-19424-6\\_22](#)).
38. Daniel C, Furno A, Goglia L, Zimeo E. Fast cluster-based computation of exact betweenness centrality in large graphs. *J Big Data.* 2021;8(1):1–39.
39. Barrington-Leigh C, Millard-Ball A. The world's user-generated road map is more than 80% complete. *PLoS ONE.* 2017;12(8):e0180698.
40. Herfort B, Lautenbach S, de Albuquerque JP, Anderson J, Zipf A. The evolution of humanitarian mapping within the OpenStreetMap community. *Sci Rep.* 2021;11(1):3037.
41. Senaratne H, Mobsaheri A, Ali AL, Capineri C, Haklay M. A review of volunteered geographic information quality assessment methods. *Int J Geogr Inf Sci.* 2017;31(1):139–67.
42. Degrossi L, De Albuquerque J, Rocha R, Zipf A. A framework of quality assessment methods for crowdsourced geographic information: a systematic literature review. 2017.
43. Barron C, Neis P, Zipf A. A comprehensive framework for intrinsic OpenStreetMap quality analysis. *Trans GIS.* 2014;18(6):877–95.
44. WMO. Mozambique cyclones are “wake-up call,” says WMO. 2019. <https://public.wmo.int/en/media/press-release/mozambique-cyclones-are-%E2%80%9Cwake-call%E2%80%9D-says-wmo>. Accessed 13 Sep 2021.
45. UNOCHA. Southern Africa: Cyclone Idai Snapshot (as of 26 March 2019)—Mozambique. ReliefWeb. <https://reliefweb.int/report/mozambique/southern-africa-cyclone-idai-snapshot-26-march-2019>. Accessed 13 Sep 2021.
46. ACAPS. MOZAMBIQUE Tropical Cyclone Idai—Briefing note. ACAPS; 2019. [https://www.acaps.org/sites/acaps/files/products/files/20190325\\_acaps\\_start\\_briefing\\_note\\_mozambique\\_cyclone\\_idai\\_update\\_ii.pdf](https://www.acaps.org/sites/acaps/files/products/files/20190325_acaps_start_briefing_note_mozambique_cyclone_idai_update_ii.pdf). Accessed 10 Sep 2021.
47. Buisson P, Farias P. MSF emergency to cyclone Idai Mozambique. Stockholm Evaluation Unit-MSF; 2019. [http://evaluation.msforg/sites/evaluation/files/attachments/seu\\_evaluation\\_idai\\_final\\_report\\_2.pdf](http://evaluation.msforg/sites/evaluation/files/attachments/seu_evaluation_idai_final_report_2.pdf). Accessed 13 Sep 2021.
48. Inter-Agency Humanitarian Evaluation Steering Group. Inter-agency humanitarian evaluation of the response to Cyclone Idai in Mozambique. Geneva: World health organization; 2020.
49. Accessibility to Healthcare. MAP. <https://malariaatlas.org/research-project/accessibility-to-healthcare/>. Accessed 25 Oct 2021.
50. Visalingam M, Whyatt JD. Line generalisation by repeated elimination of the smallest area. Cartogr Inf Syst Res Group Univ Hull. 2014. <https://hull-repository.worktribe.com/output/459275/line-generalisation-by-repeated-elimination-of-the-smallest-area>. Accessed 6 Oct 2021.
51. WFP. Mozambique satellite detected waters, Cyclone Idai—Humanitarian Data Exchange. <https://data.humdata.org/dataset/mozambique-flood-detected-waters-cyclone-idai>. Accessed 25 Oct 2021.
52. African Risk Capacity. ARC River Flood Model (AFMR-R). African Risk Capacity. 2019. [https://www.africanriskcapacity.org/wp-content/uploads/2019/06/ARC\\_AFMR\\_SouthernAfrica\\_FloodUpdate04\\_March2019\\_EN\\_20190330.pdf](https://www.africanriskcapacity.org/wp-content/uploads/2019/06/ARC_AFMR_SouthernAfrica_FloodUpdate04_March2019_EN_20190330.pdf). Accessed 6 Oct 2021.
53. UNITAR. Cumulative Satellite detected waters extent overview between 13 and 26 March 2019 over Sofala province, Mozambique—Humanitarian Data Exchange. The Humanitarian Data Exchange. <https://data.humdata.org/dataset/cumulative-satellite-detected-waters-extent-13-26-march-2019-over-sofala-province-mozambique>. Accessed 6 Oct 2021.
54. Runfola D, Anderson A, Baier H, Crittenden M, Dowker E, Fuhrig S, et al. geoBoundaries: a global database of political administrative boundaries. *PLoS ONE.* 2020;15(4):e0231866.
55. Stevens FR, Gaughan AE, Linard C, Tatem AJ. Disaggregating Census Data for Population Mapping Using Random Forests with Remotely-Sensed and Ancillary Data. *PLoS ONE.* 2015;10(2):e0107042.
56. WorldPop : Population Counts. <https://www.worldpop.org/project/categories?id=3>. Accessed 25 Oct 2021.
57. Geofabrik Download Server. <http://download.geofabrik.de/>. Accessed 25 Oct 2021.
58. Osmosis—OpenStreetMap Wiki. <https://wiki.openstreetmap.org/wiki/Osmosis>. Accessed 25 Oct 2021.
59. Raifer M, Troilo R, Kowatsch F, Auer M, Loos L, Marx S, et al. OSHDB: a framework for spatio-temporal analysis of OpenStreetMap history data. Open Geospat Data Softw Stand. 2019;4(1):3.
60. World Bank. Measuring rural access using new technologies. Washington DC: World Bank; 2016. <https://documents1.worldbank.org/curated/en/>

- [367391472117815229/pdf/107996-REVISED-PUBLIC-MeasuringRuralAccessweb.pdf](https://doi.org/10.1186/s13065-022-01079-6). Accessed 26 Oct 2021.
61. O'Sullivan D, Morrison A, Shearer J. Using desktop GIS for the investigation of accessibility by public transport: an isochrone approach. *Int J Geogr Inf Sci*. 2000;14(1):85–104.
  62. Openrouteservice. <https://openrouteservice.org/>. Accessed 25 Oct 2021.
  63. Girvan M, Newman MEJ. Community structure in social and biological networks. *Proc Natl Acad Sci*. 2002;99(12):7821–6.
  64. Xie F, Levinson D. Measuring the Structure of Road Networks. *Geogr Anal*. 2007;39(3):336–56.
  65. R Core Team. R: a language and environment for statistical computing. Vienna, Austria: R Foundation for Statistical Computing; 2021. <https://www.R-project.org/>. Accessed 10 Sep 2021.
  66. Merkel D. Docker: lightweight linux containers for consistent development and deployment. *Linux journal*. 2014;2014(239):2.
  67. QGIS Development Team. QGIS Geographic Information System. QGIS Association. 2020. <https://www.qgis.org/fr/site/>. Accessed 25 Oct 2021.
  68. UNDP. Mozambique Cyclone Idai Post-Disaster Needs Assessment (PDNA). DNA|United Nations Development Programme. 2019. <https://www.undp.org/publications/mozambique-cyclone-idai-post-disaster-needs-assessment-pdnadna>. Accessed 25 Oct 2021.
  69. Maina J, Ouma PO, Macharia PM, Alegana VA, Mitto B, Fall IS, et al. A spatial database of health facilities managed by the public health sector in sub Saharan Africa. *Sci Data*. 2019;6(1):134.
  70. South A, Dicko A, Herringer M, Macharia PM, Maina J, Okiro EA, et al. A reproducible picture of open access health facility data in Africa and R tools to support improvement. *Wellcome Open Res*. 2021. <https://wellcomeopenresearch.org/articles/5-157>. Accessed 13 Sep 2021.
  71. Nelson A. Forest Observations. Forest Resources and Carbon Emissions (IFORCE). <https://forobs.jrc.ec.europa.eu/products/gam/description.php>. Accessed 6 Oct 2021.

## Publisher's Note

Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Ready to submit your research? Choose BMC and benefit from:

- fast, convenient online submission
- thorough peer review by experienced researchers in your field
- rapid publication on acceptance
- support for research data, including large and complex data types
- gold Open Access which fosters wider collaboration and increased citations
- maximum visibility for your research: over 100M website views per year

At BMC, research is always in progress.

Learn more [biomedcentral.com/submissions](https://biomedcentral.com/submissions)



## Terms and Conditions

Springer Nature journal content, brought to you courtesy of Springer Nature Customer Service Center GmbH (“Springer Nature”). Springer Nature supports a reasonable amount of sharing of research papers by authors, subscribers and authorised users (“Users”), for small-scale personal, non-commercial use provided that all copyright, trade and service marks and other proprietary notices are maintained. By accessing, sharing, receiving or otherwise using the Springer Nature journal content you agree to these terms of use (“Terms”). For these purposes, Springer Nature considers academic use (by researchers and students) to be non-commercial.

These Terms are supplementary and will apply in addition to any applicable website terms and conditions, a relevant site licence or a personal subscription. These Terms will prevail over any conflict or ambiguity with regards to the relevant terms, a site licence or a personal subscription (to the extent of the conflict or ambiguity only). For Creative Commons-licensed articles, the terms of the Creative Commons license used will apply.

We collect and use personal data to provide access to the Springer Nature journal content. We may also use these personal data internally within ResearchGate and Springer Nature and as agreed share it, in an anonymised way, for purposes of tracking, analysis and reporting. We will not otherwise disclose your personal data outside the ResearchGate or the Springer Nature group of companies unless we have your permission as detailed in the Privacy Policy.

While Users may use the Springer Nature journal content for small scale, personal non-commercial use, it is important to note that Users may not:

1. use such content for the purpose of providing other users with access on a regular or large scale basis or as a means to circumvent access control;
2. use such content where to do so would be considered a criminal or statutory offence in any jurisdiction, or gives rise to civil liability, or is otherwise unlawful;
3. falsely or misleadingly imply or suggest endorsement, approval , sponsorship, or association unless explicitly agreed to by Springer Nature in writing;
4. use bots or other automated methods to access the content or redirect messages
5. override any security feature or exclusionary protocol; or
6. share the content in order to create substitute for Springer Nature products or services or a systematic database of Springer Nature journal content.

In line with the restriction against commercial use, Springer Nature does not permit the creation of a product or service that creates revenue, royalties, rent or income from our content or its inclusion as part of a paid for service or for other commercial gain. Springer Nature journal content cannot be used for inter-library loans and librarians may not upload Springer Nature journal content on a large scale into their, or any other, institutional repository.

These terms of use are reviewed regularly and may be amended at any time. Springer Nature is not obligated to publish any information or content on this website and may remove it or features or functionality at our sole discretion, at any time with or without notice. Springer Nature may revoke this licence to you at any time and remove access to any copies of the Springer Nature journal content which have been saved.

To the fullest extent permitted by law, Springer Nature makes no warranties, representations or guarantees to Users, either express or implied with respect to the Springer nature journal content and all parties disclaim and waive any implied warranties or warranties imposed by law, including merchantability or fitness for any particular purpose.

Please note that these rights do not automatically extend to content, data or other material published by Springer Nature that may be licensed from third parties.

If you would like to use or distribute our Springer Nature journal content to a wider audience or on a regular basis or in any other manner not expressly permitted by these Terms, please contact Springer Nature at

[onlineservice@springernature.com](mailto:onlineservice@springernature.com)