

GL GAMMA


Centrifugal Roof Units

ELTA






Ancillary Equipment




CBD - Backdraft shutter




Speed controllers



VA - Speed controller



SD - Star/Delta switch



VZ - Run-on timer

Description

The GL Gamma centrifugal roof units feature a removable windband that provides easy access for cleaning and maintenance. These compact, low profile fans are suited for ducted exhaust applications and are available in 8 sizes extending from 315 to 710mm diameter.

Typical Applications

Designed for use in commercial kitchen exhaust installations as well as applications requiring vertical discharge and all metal construction.

Features

- Robust, galvanised steel construction.
- Fitted with a high performance backward-curved centrifugal fan.
- Choice of speeds available.
- Quick release toggle clamps provide easy access for cleaning and maintenance.
- Speed-controllable with electronic or auto-transformer controllers (not on CE316VGL).
- Many 3-phase motors are 2-speed star/delta design
- Can be mounted at angles up to 30°.

Construction

Cowls are of galvanised steel construction

Backward-curved centrifugal impellers

Bird-mesh guards are an optional extra

Powder-coating is an optional extra

Motor

Type - external rotor, squirrel cage induction motors.

Electricity supply - 230V, single and 415V, three-phase, 50Hz.

Ball Bearing - sealed for life.

Speed-controllable using electronic or auto-transformer controllers (not CE316VGL).

Internal Thermal Protection

All motors are fitted with Internal Thermal Contacts as standard.

Testing

Airflow tests to ISO5801:1997

Noise tests to BS848:Part 2, 1985

Additional Information

Backdraft shutters are an optional extra. The pressure loss across the shutter has to be added to the system pressure before making fan selections.

Kitchen Hood Exhaust System

AS1668.1:1998 Clause 11.2.5 states that, for commercial installations, Kitchen Exhaust fan casings and cowls shall be manufactured from non-combustible materials that have a fusing temperature above 1000°C.

Suggested Specifications


The roof ventilators shall be of the GL Gamma vertical discharge type as designed and manufactured by Elta.

Impellers shall be backward-curved centrifugal design and driven by speed-controllable external rotor motors with integral thermal protection.

The cowls shall be of the vertical discharge design and manufactured from galvanised steel. Steel components to be corrosion protected.

All data shall be based on tests on a complete assembled unit to ISO5801:1997 for airflow and BS848:Part 2, 1985 for noise.

How To Order

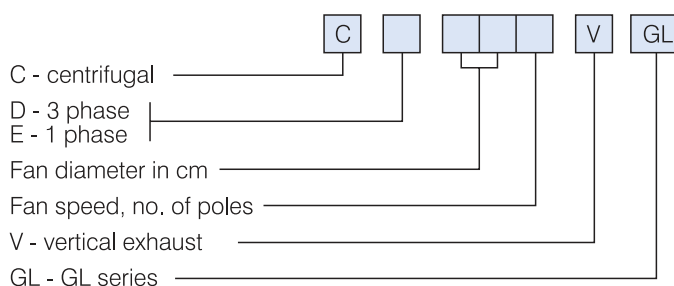

Technical Data & Noise Levels

Model CD...VGL CE...VGL	Nom. Speed r/s	Avg dB(A) @ 3m		CE.. 1 ph.		CD.. 3 ph.		In-duct Spectrum Corrections, dB**							
		Low Air Flow	High Airflow	kW	Amps*	kW	Amps*	63	125	250	500	1k	2k	4k	8k
314.	23	Inlet 47	48	0.15	0.66	0.18	0.37	35	29	21	18	10	10	8	2
316.†	15	Inlet 40	42	0.07	0.54	0.09	0.15	34	26	22	18	12	12	6	0
354.	23	Inlet 52	51	0.28	1.25	0.19	0.51	28	26	22	19	10	12	11	1
356.	15	Inlet 43	43	0.07	0.32	0.13	0.22	33	25	22	19	14	8	3	0
404.	23	Inlet 56	54	0.49	2.20	0.45	1.40	28	26	21	18	11	12	12	5
406.	15	Inlet 44	44	0.17	0.80	0.23	0.73	33	28	22	19	14	10	7	3
408.	11	Inlet 39	40	-	-	0.16	0.30	33	26	19	16	14	14	12	3
454.	23	Inlet 59	57	0.76	3.50	0.77	1.47	27	25	20	17	11	12	12	8
456.	15	Inlet 47	46	0.43	2.00	0.44	0.90	31	30	21	18	13	11	9	5
458.	11	Inlet 41	43	-	-	0.15	0.35	33	26	19	16	14	14	12	3
504.	23	Inlet 62	61	1.30	5.70	1.39	2.70	26	26	21	15	12	12	12	9
506.	15	Inlet 50	50	0.53	2.50	0.65	1.20	30	29	22	16	12	10	8	6
508.	11	Inlet 43	45	0.23	1.15	0.30	0.50	32	26	20	16	14	13	12	4
564.	23	Inlet 65	65	-	-	2.16	4.10	26	27	23	14	13	12	12	10
566.	15	Inlet 54	54	0.84	4.10	0.69	1.45	29	29	23	15	12	10	8	7
568.	11	Inlet 44	47	0.32	1.50	0.39	0.79	30	27	22	15	15	11	11	6
634.	23	Inlet 69	70	-	-	4.30	7.35	24	28	24	12	13	11	12	10
636.	15	Inlet 60	58	-	-	1.10	2.20	28	29	24	14	12	10	8	8
638.	11	Inlet 46	50	-	-	0.68	1.20	28	27	23	14	14	9	10	6
716.	15	Inlet 63	61	-	-	2.20	4.30	28	29	24	14	12	10	8	8
718.	11	Inlet 48	53	-	-	0.66	2.00	28	27	23	14	14	9	10	6
711.	9	Inlet 41	46	-	-	0.28	1.20	28	27	23	14	14	9	10	6


Electrical data in **bold** type refers to fans fitted with 2-speed star/delta motors as standard.

* Amperages shown are a guide only, refer to our Sales Department for accurate figures at time of order.

** Add the In-Duct Spectrum Corrections to the closest dB(A) level shown on the fan curve to obtain the In-Duct Sound Power Levels on the Inlet Side of the unit.

† The CE316VGL is not speed controllable.

Dimensions






Model	Dimensions, mm					Approx.	Approx.
CD...VGL	A	B	C	D	E	weight	volume
CE...VGL						kg.	m³
314	310	410	50	310	520	16	0.10
316							
354	400	500	50	420	670	26	0.22
356							
404	400	500	50	420	670	26	0.22
406							
408							
454	620	720	60	525	900	49	0.50
456							
458							
504	620	720	60	525	900	57	0.50
506							
508							
564	620	720	60	525	900	65	0.50
566							
568							
634	710	810	60	665	1160	97	1.03
636							
638							
716	710	810	60	665	1160	95	1.03
718							
711							

Additional Information

Performance curves shown are based on nominal speeds.

As motor speeds may vary from one manufacturer to another, and from one motor type to another, variations in performance can result.

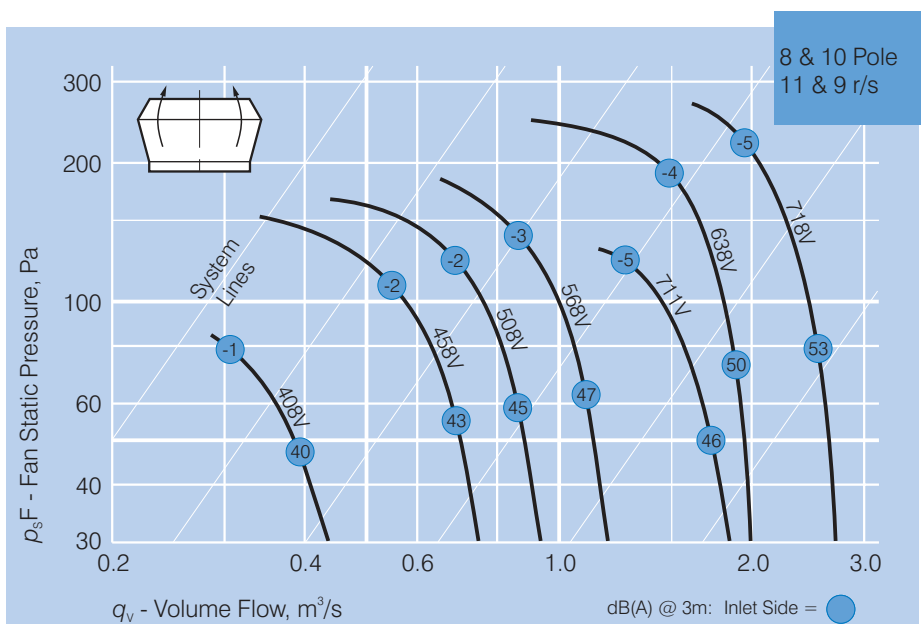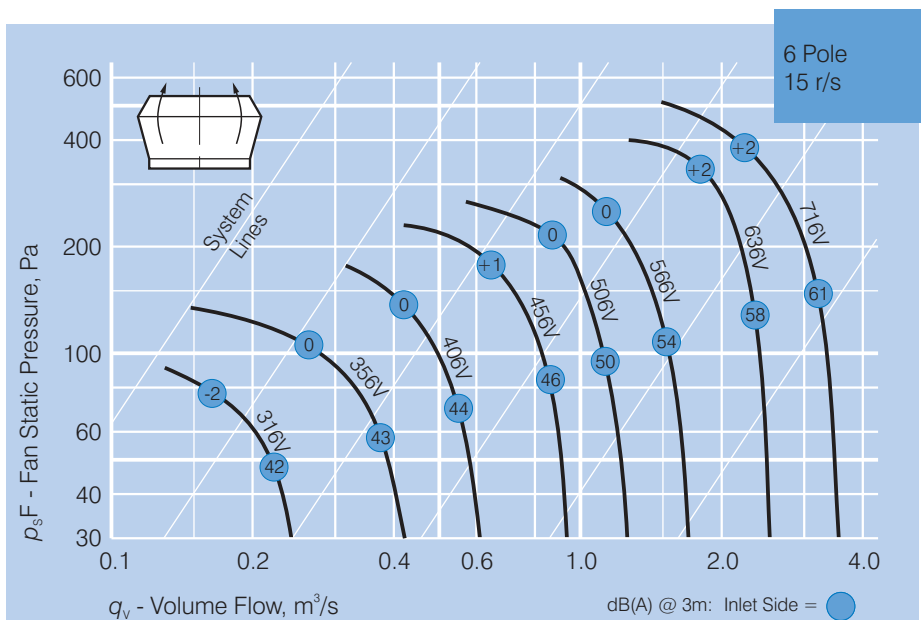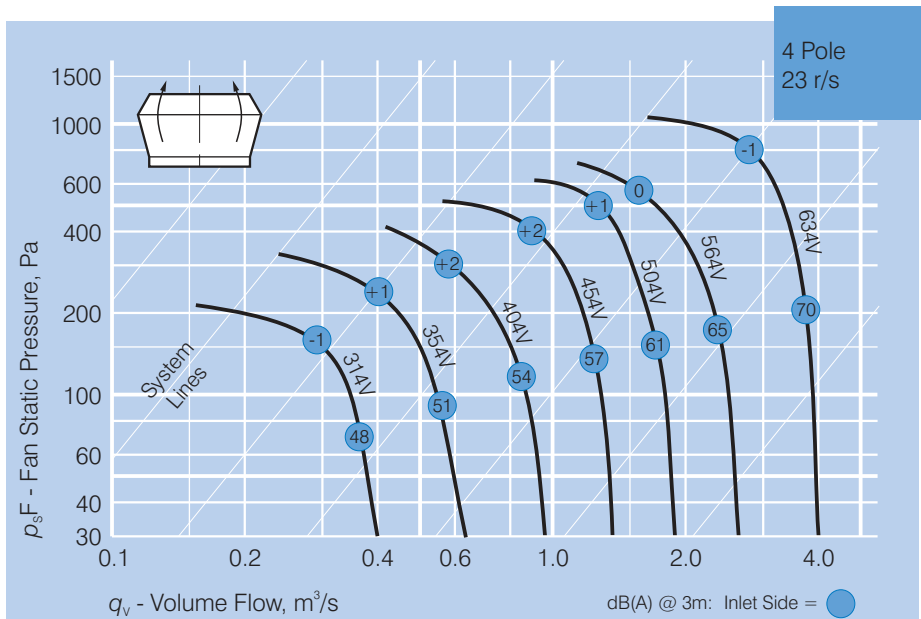

Notes

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

[illegible]

Notes

[illegible]



Elta Asia Sdn Bhd

Tel **+603 7846 0340**

Email **info@elta.asia**

elta.asia

GLG-05-2026 Issue A



FS 676456

A MEMBER OF  ELTA GROUP