





CABLE TRAY AND TRUNKING

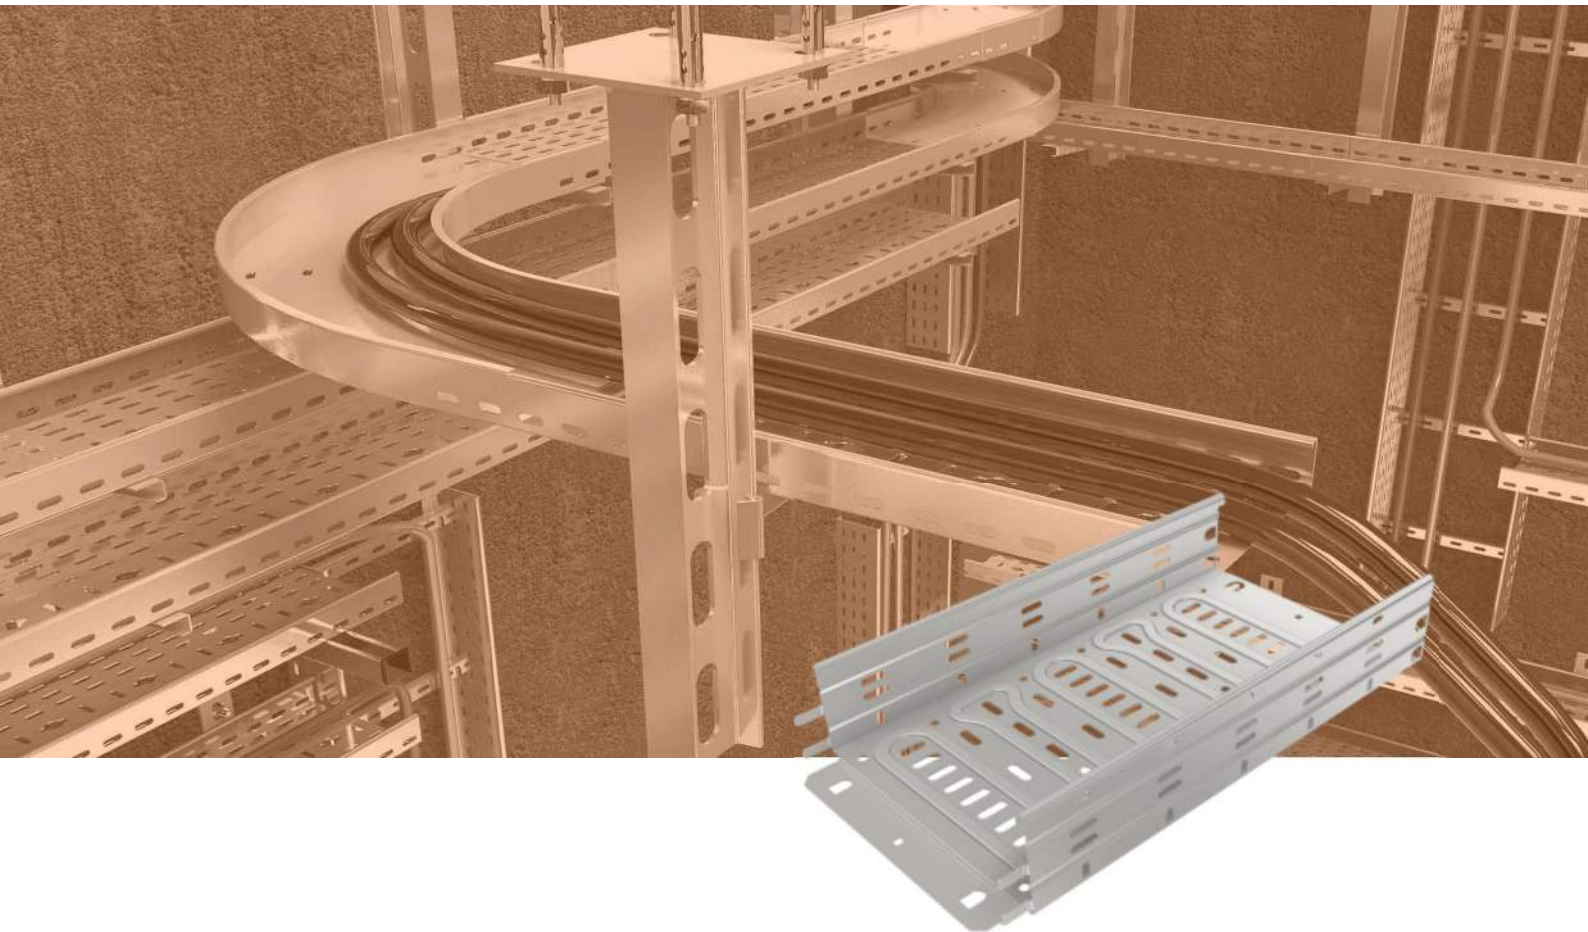

BASIC COMPONENTS OF THE SYSTEM*

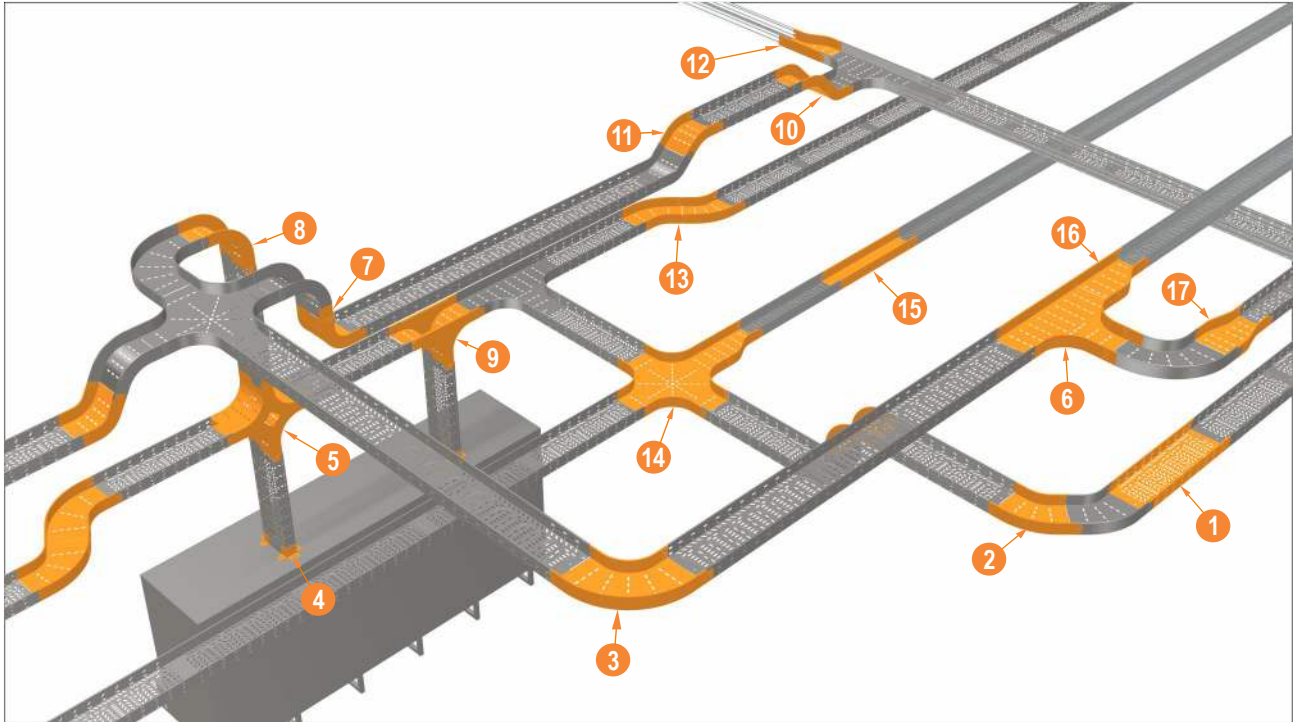

- | | |
|---------------------------|------------------------|
| 1. Standard length | 10. Z riser |
| 2. 45° flat bend | 11. 45° internal riser |
| 3. Flat elbow | 12. Left reducer |
| 4. Electric box connector | 13. Z flat bend |
| 5. Vertical cross piece | 14. Cross piece |
| 6. Tee piece | 15. Trunking length |
| 7. Internal riser | 16. Right reducer |
| 8. External riser | 17. Straight reducer |
| 9. Vertical Tee piece | |

SPECIFICATION

Starduct cable tray/trunking are made of sheet steel, ZAM K27 (Nippon Steel), galvanized steel sheet (Z18), surfaced finished with powder coat. Thickness of 1.0 ~ 1.5 and 2.0mm.

Products is fabricated by punching, forming, stiffening with ribs on sides and bed.

Connectors are intergrated on the ends of lengths and fittings (folding tab & slot type), no use coupler/splicer for faster intallation and effective cost.

Production standard: TCVN 10688:2015/ IEC 61537:2006.

Certificate of conformity No : SP 2781.20.17(System 5, Circular No.28/2012/TT-BKHCN Dated 12 Dec 3012)

Certified criteria:SWL tests at mininum and high temperatures. SWL tests for hanging and cantilever system. SWL tests for cantilever on vertical column. Impact test. Spread of fire test. Contribution to fire test. Surface resistance test. Coating thickness and resistance against corrosion tests (to gavalnized and powder coated products) as per TCVN 10688:2015.IEC 61537:2006

(*) For illustration purpose only



BASIC INFORMATION



Product Standard

- TCVN 10688:2015/IEC 61537:2006

Materials

- Galvanized steel sheet
- 3-component coated steel sheet
- Stainless steel 304

Finishes

- Z18 galvanized
- Natural surface: Zam K27, stainless steel
- Powder coat (RAL)

Sides and slots

- Sides of tray are stiffened by ribs, edges are formed return flanges - standard IEC 61537:2006. Bed of tray is strengthened by embossed stiffener of 10mm.

Connections & joints

- Integrated "tab&slot" at ends of lengths and fittings. Need no couplers or splicers.

Load classes

- Light - Medium - Heavy - Extra heavy in correspondent to standard heights of 50 - 100 - 150 and 200 (mm)

UNIQUE CONNECTION FOR EASIER AND FASTER INSTALLATION


Special design of Starduct cable tray allows installation for lengths and fittings without couplers/splicers and bolts. This brings in benefits of saving cost and time.



Traditional connection

- 2 coupling pieces
- 1 earthing wire
- 10 bolts

**SAVE
UP TO
65%**

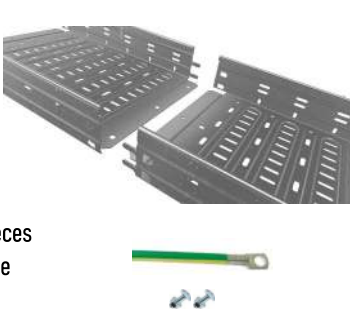

STARDUCT connection

- 0 coupling pieces
- 1 earthing wire
- 3 bolts


An example of comparison between the two above connections

Items	TRADITIONAL		STARDUCT		
	Quantity	\$	Quantity	\$	
▪ coupling pieces	2 pieces	5.000	0 pieces	0	Starduct joints save up to 65% cost for accessories and labour reducing installation time
▪ bolt & nut	10 sets	15.000	3 sets	4.500	
▪ earthing wire	01	5.000	01	5.000	
▪ labour	3 min.	3.000	1 min.	1.000	
Total		28.000		10.500	

Note: the above cost is assumed for the purpose of comparison, the actual cost may be changed but not affect the percentage of saving.



LENGTH OF TRAY

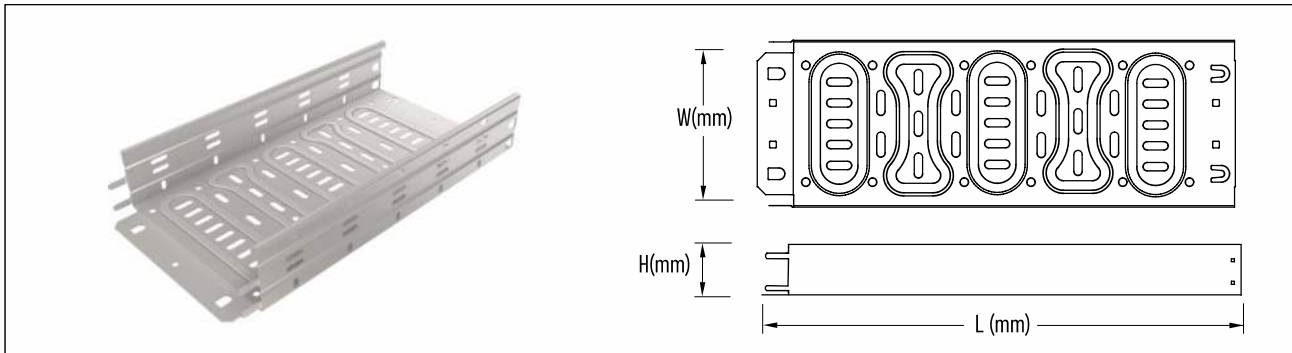

Size & SWL

No.	Product codes	Width (W)	Height (H)	Length (L)	Thickness (t)	Safe working load SWL	Weight (trunking)	Free rate (perforated)
		mm	mm	mm	mm	kg/m	kg/m	class
	Light range - H50							
1	SC/ST (H50 x W100)	100	50	3000	0.8	8.5	1.42	C
2	SC/ST (H50 x W150)	150	50	3000	0.8	12.8	1.74	C
3	SC/ST (H50 x W200)	200	50	3000	0.8	17.0	2.05	C
4	SC/ST (H50 x W300)	300	50	3000	0.8	25.5	2.68	C
5	SC/ST (H50 x W400)	400	50	3000	1.2	34.0	4.13	C
	Light range - H75							
1	SC/ST (H75 x W150)	150	75	3000	0.8	19.1	2.05	C
2	SC/ST (H75 x W250)	250	75	3000	0.8	31.9	2.68	C
3	SC/ST (H75 x W350)	350	75	3000	1.2	44.6	4.96	C
4	SC/ST (H75 x W450)	450	75	3000	1.2	57.4	5.90	C
5	SC/ST (H75 x W550)	550	75	3000	1.5	70.1	8.56	C
	Medium range - H100							
1	SC/ST (H100 x W100)	100	100	3000	0.8	17.0	2.05	C
2	SC/ST (H100 x W150)	150	100	3000	0.8	21.0	2.36	C
3	SC/ST (H100 x W200)	200	100	3000	0.8	34.0	2.68	C
4	SC/ST (H100 x W250)	250	100	3000	0.8	42.0	3.74	C
5	SC/ST (H100 x W300)	300	100	3000	1.2	51.0	4.13	C
6	SC/ST (H100 x W400)	400	100	3000	1.2	68.0	5.90	C
7	SC/ST (H100 x W500)	500	100	3000	1.5	85.0	8.56	C
	SC/ST (H100 x W600)	600	100	3000	1.5	102.0	9.73	C
	Heavy range - H150	Contact us						
	Extra heavy range - H200	Contact us						

Contact Star Asia for other sizes

Ordering code

SC/ST-WxH-GI/Z/S/P(+RAL)

SC = perforated tray
ST = trunking

W = 100 - 600 (mm)
H = 50/75/100/150/200 (mm)

Finish options:


- GI = galvanized
- Z = ZAM
- S = stainless steel
- P(+RAL) = powder coat + color code

RAL color code

RAL 1033	RAL 7035
RAL 9000	RAL 1015
RAL 6024	RAL 5004
RAL 6027	RAL 2000



FLAT BENDS & ELBOW

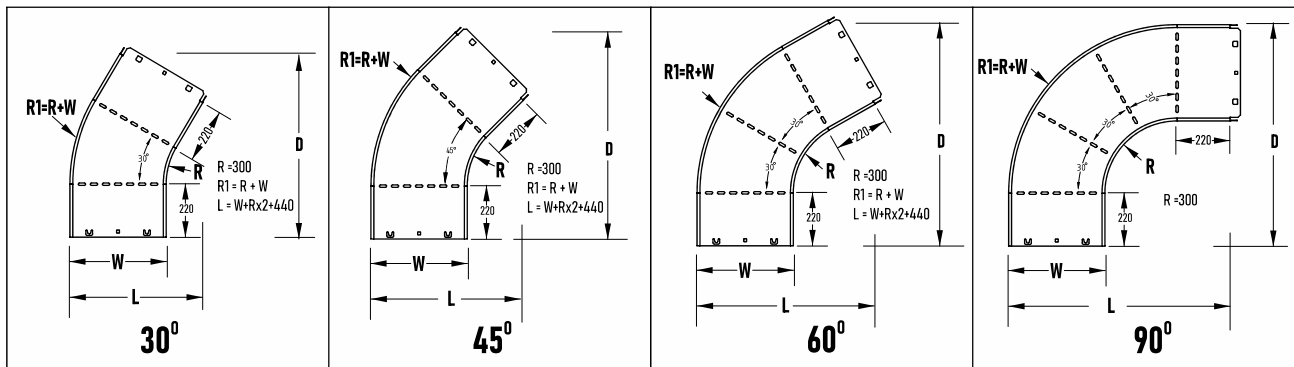


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard widths (W)	30°		45°		60°		90°
	L	D	L	D	L	D	L = D
100	250	610	340	660	390	600	520
200	350	660	440	730	490	680	620
300	450	710	540	800	590	760	720
400	550	760	640	870	690	840	820
500	650	810	740	940	790	920	920
600	750	860	840	1010	890	1000	1020

Contact Star Asia for other sizes

FLAT BENDS & ELBOW (SHORT RANGE)

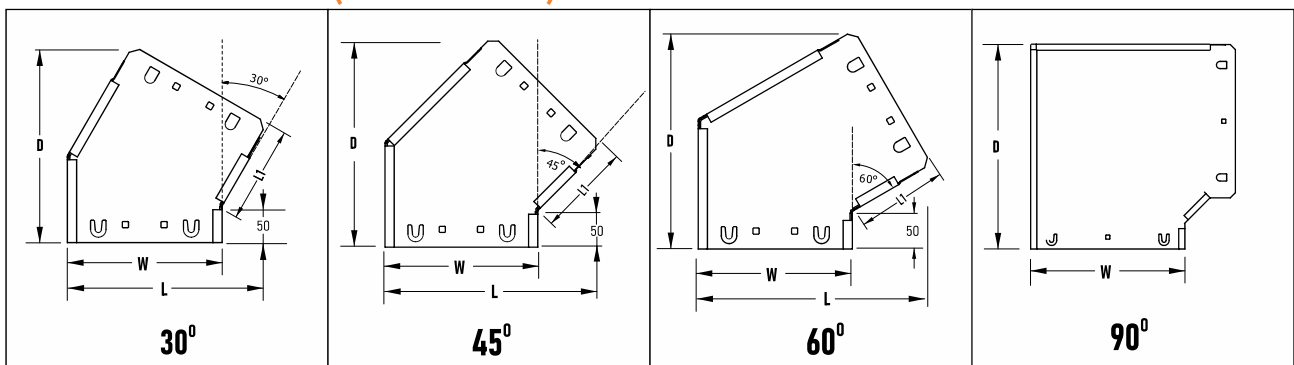

Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard widths (W)	30°			45°			60°			90°
	L	L1	D	L	L1	D	L	L1	D	L = D
100	200	71	200	200	71	200	200	71	200	200
200	300	71	300	300	71	300	300	71	300	300
300	400	71	400	400	71	400	400	71	400	400
400	500	71	500	500	71	500	500	71	500	500
500	600	71	600	600	71	600	600	71	600	600
600	700	71	700	700	71	700	700	71	700	700

Contact Star Asia for other sizes

Ordering code

ST - S - 30/45/60/90 - WxH - GI/Z/S/P(+RAL)

ST = Tray fittings

S = short range opt.

30/45/60/90 = flat bend
30, 45, 60 or 90 degree

Finish options:


- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

Size:

- W = width : 100 - 600 (mm)
- H = height : 50/75/100/150/200 (mm)



INTERNAL AND EXTERNAL RISERS

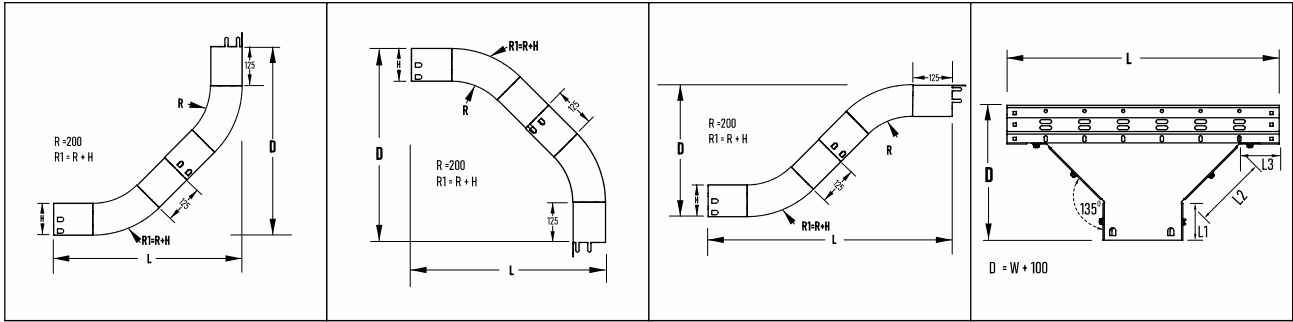


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard heights (H)	in 90°		ex 90°		Z		Tee	
	L	D	L	D	L	D	L	D
50	550	550	550	550	740	360		
100	600	600	600	600	780	420		
150	650	650	650	650	810	490		
200	700	700	700	700	850	550		

Contact Star Asia for other sizes

INTERNAL AND EXTERNAL RISERS (SHORT RANGE)

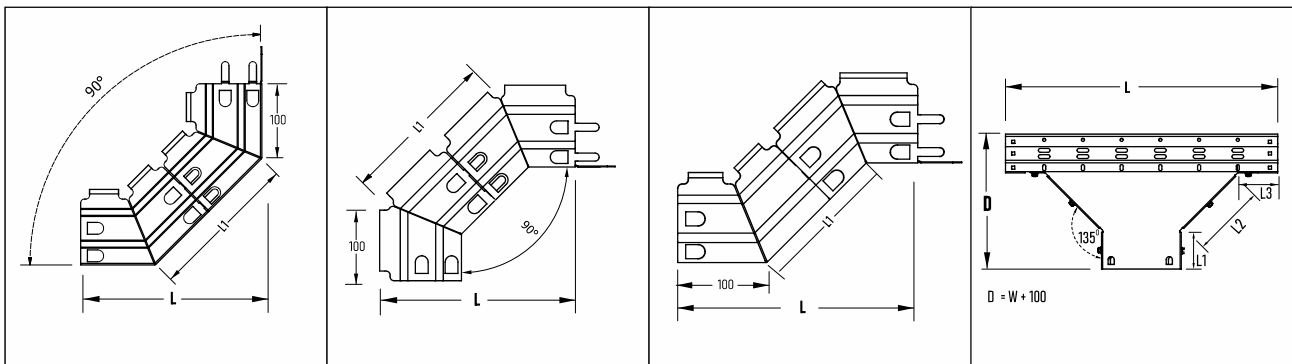

Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard heights (H)	in. 90°		ex. 90°		Z		Tee	
	L	L1	L	L1	L	L1	L	D
50	200	142	200	142	200	142		
100	300	142	300	142	300	142		
150	400	142	400	142	400	142		
200	500	142	500	142	500	142		

Contact Star Asia for other sizes

Ordering code

ST - S - U/D/Z/T - WxH - GI/Z/S/P(+RAL)

ST = Tray fittings

S = short range opt.

- U = in. 90 - D = ex. 90
- Z = Z - T = Tee

Finish options:


- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

Size:

- W = width : 100 - 600 (mm)
- H = height : 50/75/100/150/200 (mm)



FLAT TEE PIECE

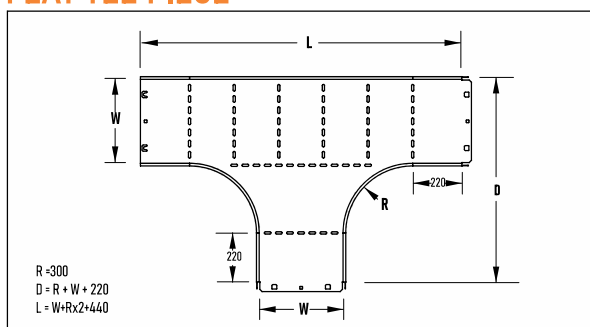


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Chiều rộng cơ bản (W)	L	D
100	620	1140
200	720	1240
300	820	1340
400	920	1440
500	1020	1540
600	1120	1640

Contact Star Asia for other sizes

FLAT CROSS PIECE

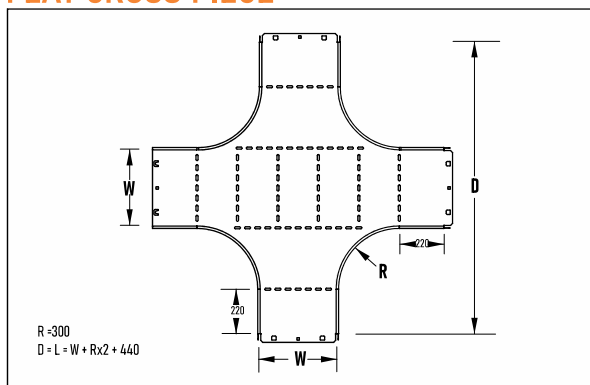


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Chiều rộng cơ bản (W)	L	D
100	1140	1140
200	1240	1240
300	1340	1340
400	1440	1440
500	1540	1540
600	1640	1640

Contact Star Asia for other sizes

FLAT TEE PIECE (SHORT)

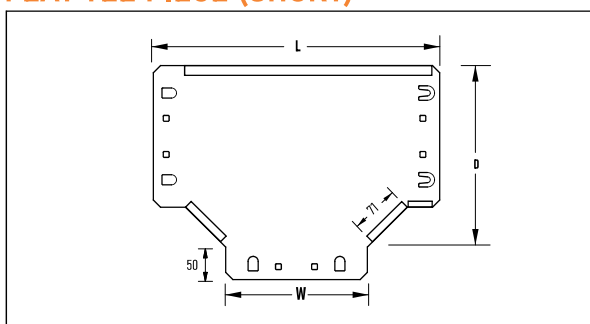


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Chiều rộng cơ bản (W)	L	D
100	300	200
200	400	300
300	500	400
400	600	500
500	700	600
600	800	700

Contact Star Asia for other sizes

FLAT CROSS PIECE (SHORT)

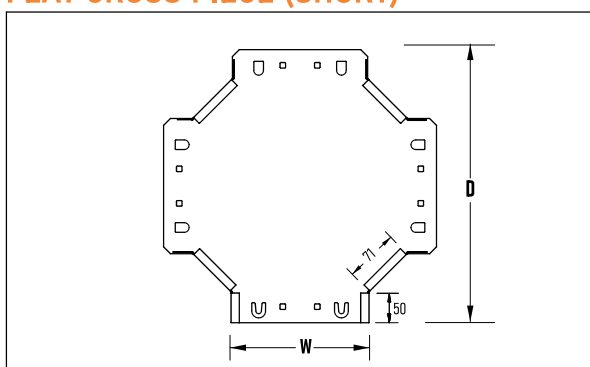

Thicknesses as per the applicable tray (see p.10) - Unit: mm

Chiều rộng cơ bản (W)	L	D
100	300	300
200	400	400
300	500	500
400	600	600
500	700	700
600	800	800

Contact Star Asia for other sizes

Ordering code

ST - S - 3/4 - WxH - GI/Z/S/P(+RAL)

ST = Tray fittings

S = short range opt.

3 = Tee piece

4 = cross piece

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel

- P(+RAL) = powder coat + color code


Size:

- W = width : 100 ~ 600 (mm)

- H = height : 50/75/100/150/200 (mm)



REDUCER

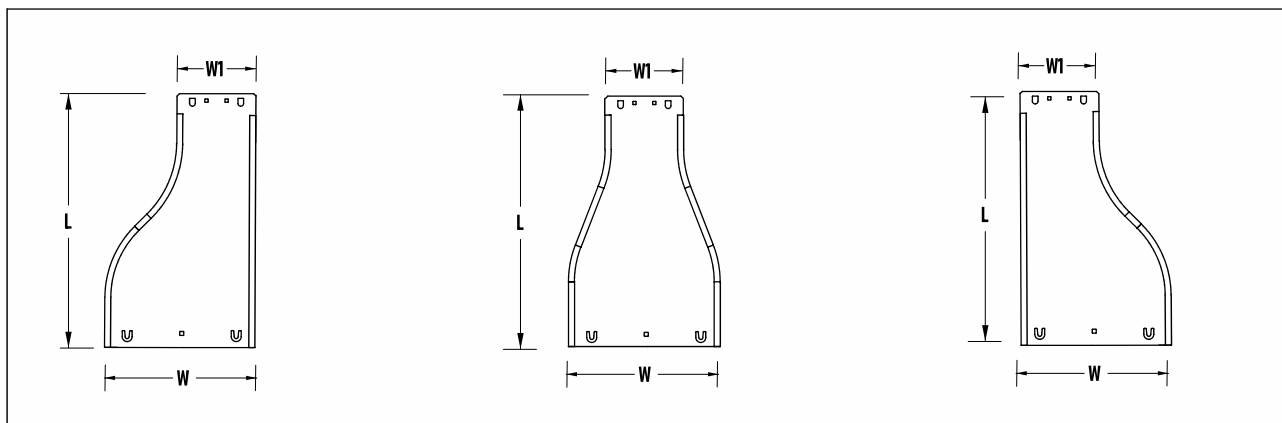


Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard widths (W)	L	W 1
200	350	100
300	350	200
400	350	300
500	350	400
600	400	500

Contact Star Asia for other sizes

REDUCER (SHORT)

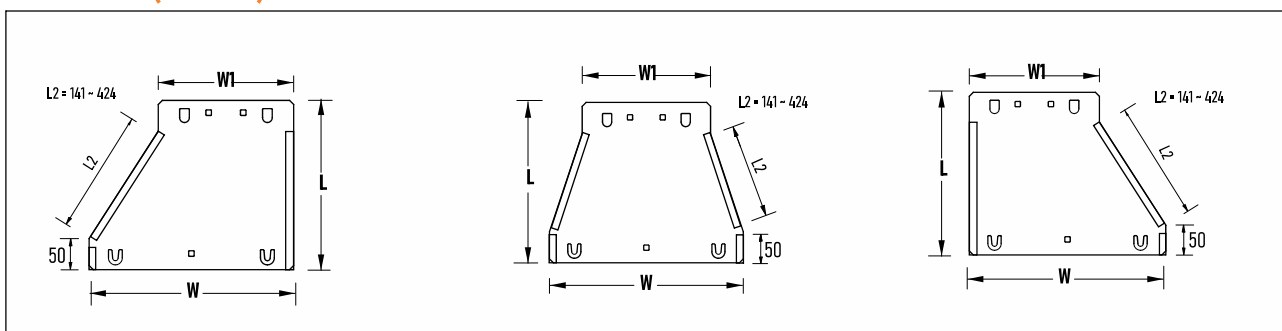

Thicknesses as per the applicable tray (see p.10) - Unit: mm

Standard widths (W)	L	W 1
200	250	100
300	250	200
400	250	300
500	250	400
600	300	500

Contact Star Asia for other sizes

Ordering code

ST - S - R/M/L - WxW1xH - GI/Z/S/P(+RAL)

ST = Tray fittings

S = short range opt.

R = right reducer
M = Straight reducer
L = left


- W = 200 - 600 (mm)
- W1 = 100 - 500 (mm)
- H = Cao: 50/75/100/150/200 (mm)

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code



STRAIGHT SPLICING PLATE

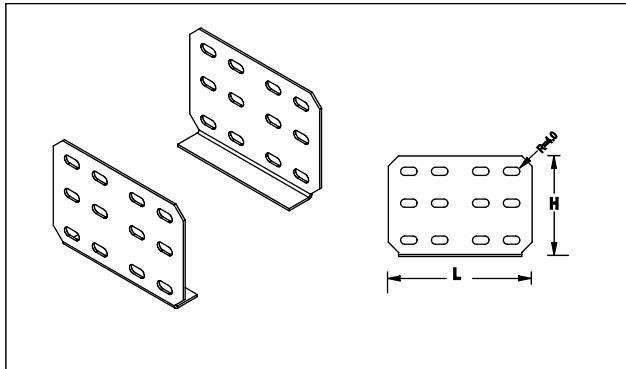

UNIT: mm

Dimensions				Number of holes	
Prod. code	L	H	Thickness	Number	Ø
SLP-50	150	50	2.5	6	D8
SLP-100	150	100	2.5	6	D8
SLP-150	200	150	2.5	6	D10
SLP-200	200	200	2.5	8	D12

Ordering code

Contact Star Asia for other sizes

SLP-LxH-GI/Z/S/P


SLP = straight splicer

L = length x H = height

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

ADJUSTABLE PLATE

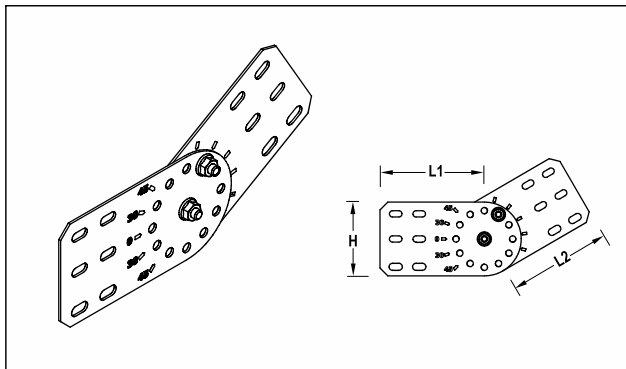

UNIT: mm

Dimensions						
Prod. code	L1	L2	H	Thickness	No. of holes	Angles
SLUF-50	150	150	50	2.5	6	180 - 90
SLUF-100	150	150	100	2.5	6	180 - 90
SLUF-150	150	150	150	2.5	6	180 - 90
SLUF-200	150	150	200	2.5	8	180 - 90

Ordering code

Contact Star Asia for other sizes

SLUF-LxH-GI/Z/S/P


SLUF = adjustable plate

L = length x H = height

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

ELECTRIC BOX CONNECTOR

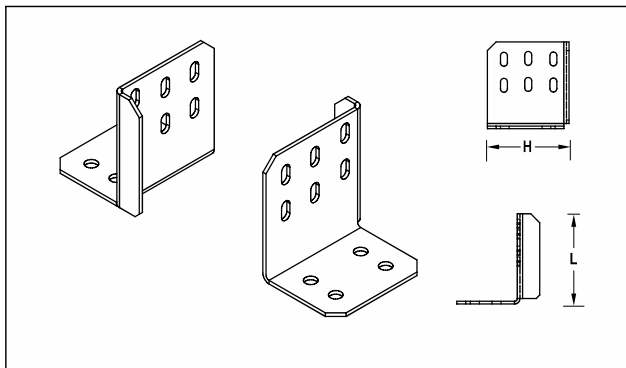

UNIT: mm

Dimensions			
Prod. code	H	L	Thickness
SLCF-50	50	150	2.5
SLCF-100	100	150	2.5
SLCF-150	150	200	2.5
SLCF-200	200	200	2.5

Ordering code

Contact Star Asia for other sizes

SLCF-LxH-GI/Z/S/P


SLCF = Elec. box connector

L = length x H = height

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

END CAP

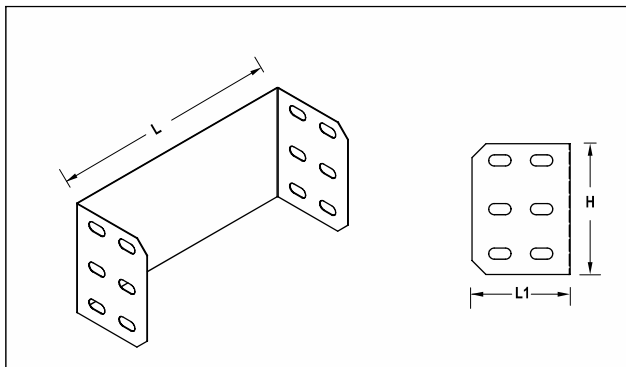

UNIT: mm

Chi tiết sản phẩm			
Mã SP	H	L	Độ dày
SLEC-50	50	100-800	2.0
SLEC-100	100	100-800	2.0
SLEC-150	150	100-800	2.0
SLEC-200	200	100-800	2.0

Ordering code

Contact Star Asia for other sizes

SLEC-LxH-GI/Z/S/P


SLEC = end cap

L = length x H = height

Finish options:

- GI = galvanized - Z = ZAM - S = stainless steel
- P(+RAL) = powder coat + color code

STRAIGHT CONNECTOR

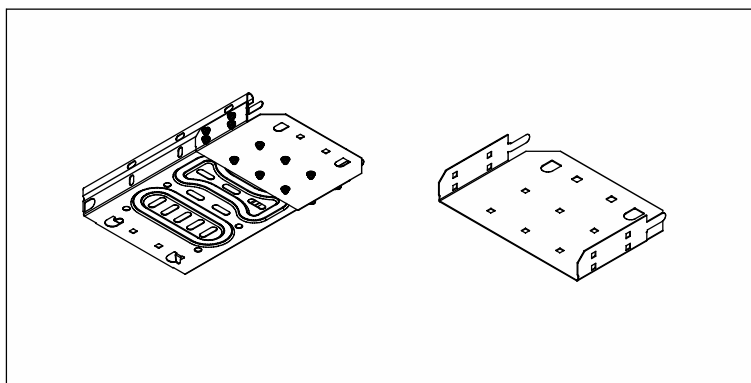

UNIT: mm

Width (W)	Thickness	Height
	mm	mm
100	0.8	50
200	0.8	50
300	1.0	50
400	1.0	50
500	1.5	50
600	1.5	50
700	1.5	50
800	1.5	50

Contact Star Asia for other sizes


MÃ ĐẶT HÀNG

SCJ - WxL - GI/Z/S/P(+RAL)
SCJ = straight conn.

W = width of applicable tray
L = length

GI = galvanized - **Z** = ZAM
S = stainless steel
P(+RAL) = powder coat + color code

COVER (> 700 Without grooves)

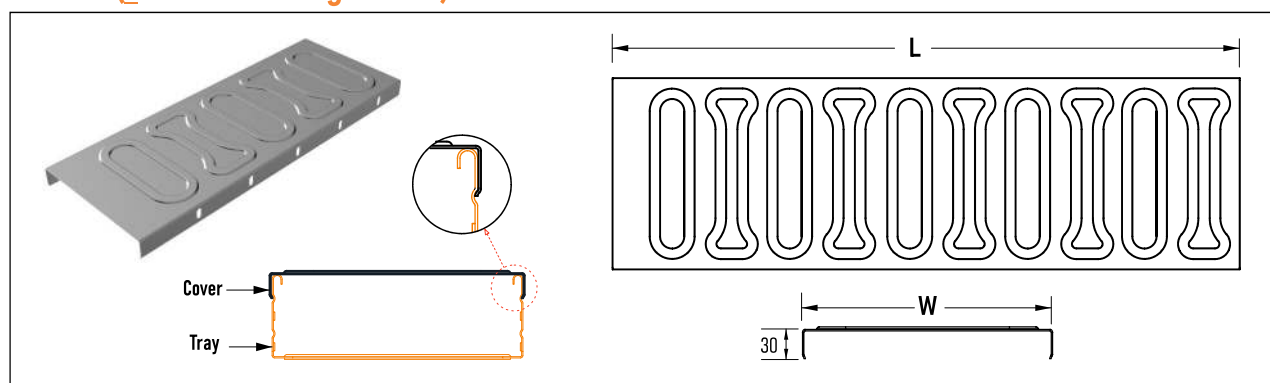

Width of applicable tray (W)	Thickness (t)	Weight	Height
	mm	kg/m	mm
100	0.8	1.1	30
200	0.8	1.8	30
300	0.8	2.5	30
400	0.8	4.0	30
500	0.8	4.8	30
600	1.2	5.7	30

Contact Star Asia for other sizes

MÃ ĐẶT HÀNG

SCC - WxL - GI/Z/S/P(+RAL)
SCC = cover

W = width of applicable tray
L = length

GI = galvanized - **Z** = ZAM
S = stainless steel
P(+RAL) = powder coat + color code