

MECANAV





TREE HIGHLIGHTERS



SPECIFICATION

Model	THL-WW-IP66-24V/AC220
Colour	Warm White (2700K / 3000K / 3500K)
Shape	Cylindrical or Bullet-shaped
Material	Die-cast Aluminum Housing
Finish Type	Powder-Coated, Anti-Corrosive
Light SourceType	Selected high-end eco-friendly paint
Shade Material	SMD RGBW 4in1 LED
Power Source	24V DC / 48V DC / AC 100–240V, 50/60Hz
Number of Batteries	Not Applicable
Style	Architectural Landscape Lighting
Voltage	24V DC / 48V DC / AC 220V
Brightness	1200–3600 Lumens (varies with wattage)
Battery Description	Not Applicable
Light Source Wattage	12W / 18W / 24W / 36W / 48W
Mounting Type	Ground Spike / Surface Mount / Tree Strap Clamp
Number of Light Sources	1–4 LED clusters
Product Dimensions	Ø60–80mm x H120–200mm
Special Features	Surge Protection, Thermal Cutoff
Control Protocols	NA (Non-Pixel)
Shade Color	Clear
Protection Rating	IP66
System Port	Waterproof DC Connector / Direct Terminal



TREE HIGHLIGHTERS



SPECIFICATION

Model	THL-RGB-IP66-24V/AC220
Colour	RGB (Red, Green, Blue)
Shape	Cylindrical or Bullet-shaped
Material	Die-cast Aluminum Housing
Finish Type	Powder-Coated, Anti-Corrosive
Light SourceType	Selected high-end eco-friendly paint
Shade Material	SMD RGBW 4in1 LED
Power Source	24V DC / 48V DC / AC 100–240V, 50/60Hz
Number of Batteries	Not Applicable
Style	Architectural Landscape Lighting
Voltage	24V DC / 48V DC / AC 220V
Brightness	1200–3600 Lumens (varies with wattage)
Battery Description	Not Applicable
Light Source Wattage	12W / 18W / 24W / 36W / 48W
Mounting Type	Ground Spike / Surface Mount / Tree Strap Clamp
Number of Light Sources	3-in-1 RGB LED modules
Product Dimensions	Ø60–80mm x H120–200mm
Special Features	DMX512 Controllable, Static / Dynamic Effects
Control Protocols	DMX512
Shade Color	Clear
Protection Rating	IP66
System Port	XLR 3/5 Pin or Waterproof Signal Port



TREE HIGHLIGHTERS




SPECIFICATION

Model	THL-RGB-IP66-24V/AC220
Colour	RGB + White (3000K or 4000K)
Shape	Cylindrical or Bullet-shaped
Material	Die-cast Aluminum Housing
Finish Type	Powder-Coated, Anti-Corrosive
Light SourceType	Selected high-end eco-friendly paint
Shade Material	SMD RGBW 4in1 LED
Power Source	24V DC / 48V DC / AC 100–240V, 50/60Hz
Number of Batteries	Not Applicable
Style	Architectural Landscape Lighting
Voltage	24V DC / 48V DC / AC 220V
Brightness	1200–3600 Lumens (varies with wattage)
Battery Description	Not Applicable
Light Source Wattage	18W / 24W / 36W / 48W / 60W
Mounting Type	Ground Spike / Surface Mount / Tree Strap Clamp
Number of Light Sources	4-in-1 RGBW clusters
Product Dimensions	Ø60–80mm x H120–200mm
Special Features	DMX/DALI Control, Flicker-Free Driver
Control Protocols	DMX512 / DALI (Optional)
Shade Color	Clear
Protection Rating	IP66
System Port	Waterproof 4-Pin / 5-Pin Connector



TREE HIGHLIGHTERS

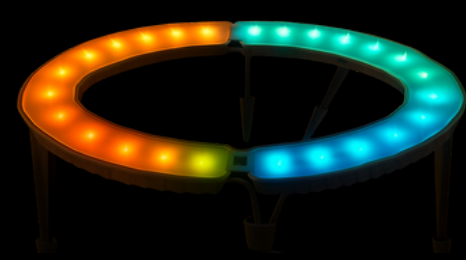

SPECIFICATION

Model	THL-RGBWW-IP66-24V/AC220
Colour	RGB + Warm White (2700K–3000K)
Shape	Cylindrical or Bullet-shaped
Material	Die-cast Aluminum Housing
Finish Type	Powder-Coated, Anti-Corrosive
Light SourceType	5-in-1 RGBWW LED Module
Shade Material	SMD RGBW 4in1 LED
Power Source	24V DC / 48V DC / AC 100–240V, 50/60Hz
Number of Batteries	Not Applicable
Style	Contemporary Architectural
Voltage	24V DC / 48V DC / AC 220V
Brightness	2000–4500 Lumens
Battery Description	Not Applicable
Light Source Wattage	18W / 24W / 36W / 48W / 60W
Mounting Type	Ground Spike / Surface Mount / Tree Strap Clamp
Number of Light Sources	5-in-1 LED modules
Product Dimensions	Ø60–80mm x H120–200mm
Special Features	Full Spectrum Blending, DMX/DALI Compatible
Control Protocols	DMX512 / DALI / SPI
Shade Color	Clear
Protection Rating	IP66
System Port	Waterproof SPI / DMX Port (Customizable)

THANK YOU