


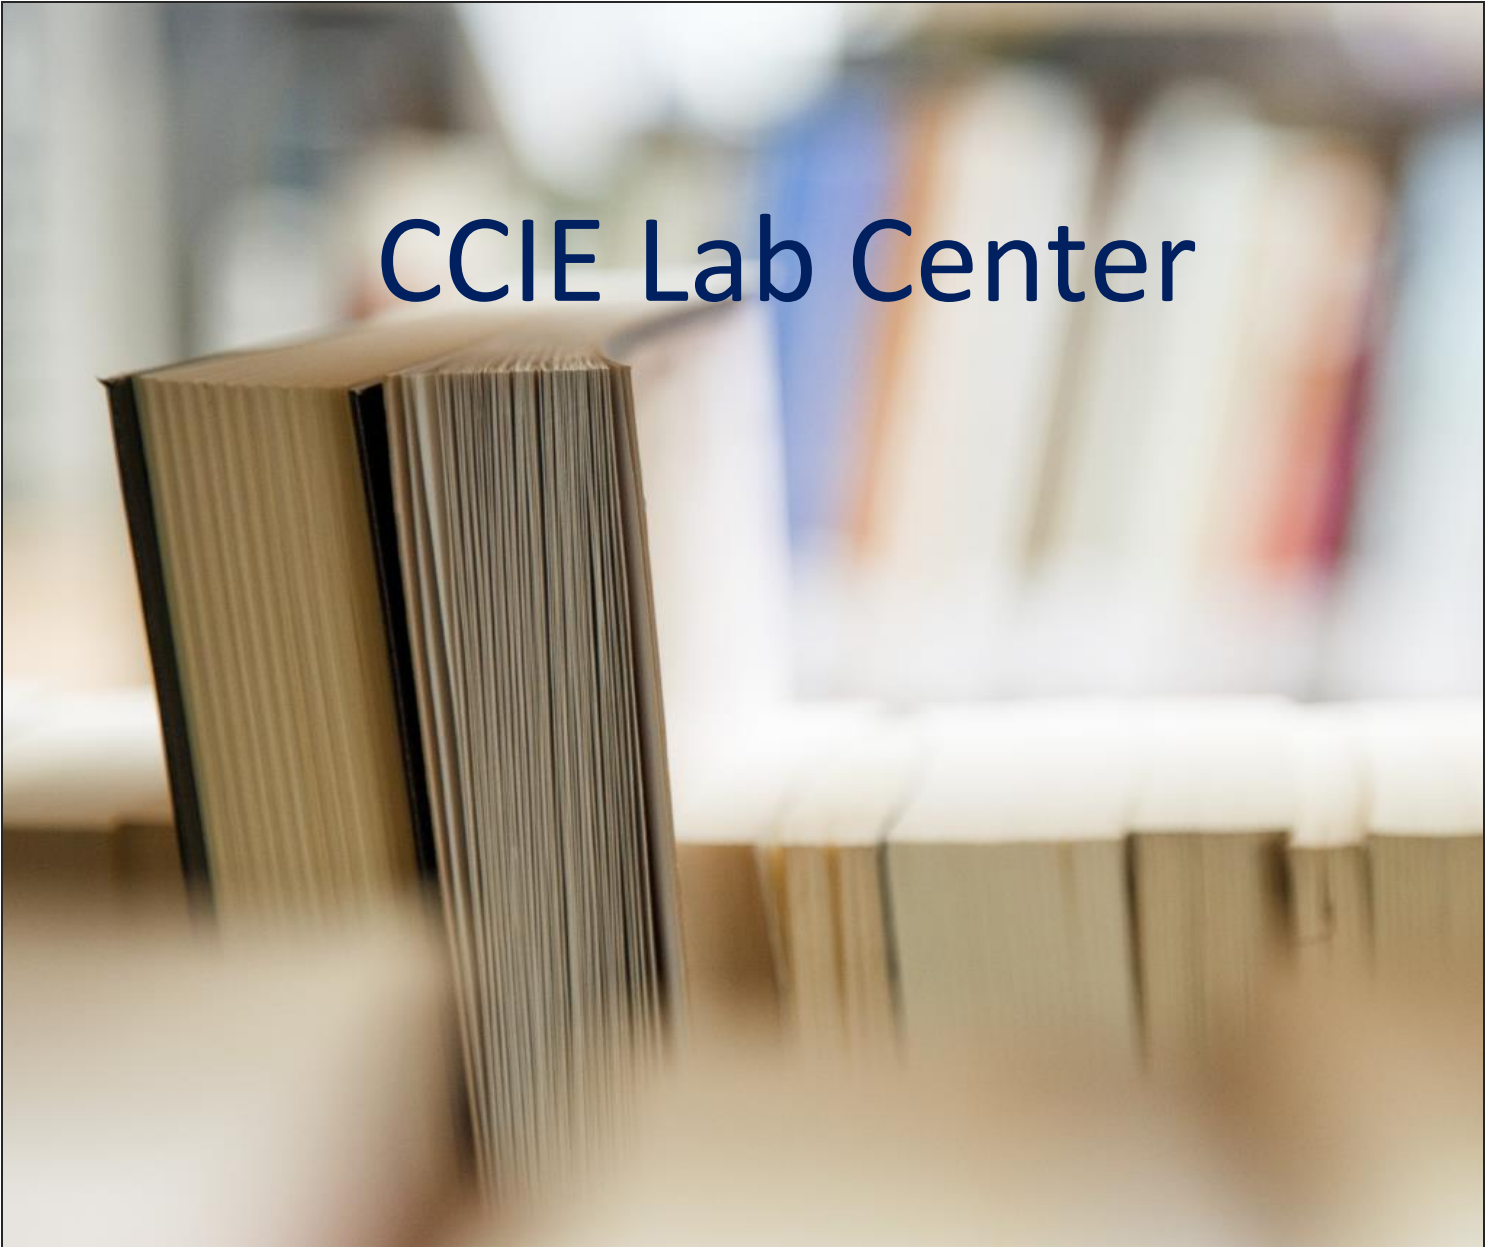

CCIE Lab Center

CLC-CCIE Security v6.1: Real Lab1 - Design

CLC

Website

<https://ccielabcenter.com>

Forum

<https://forum.ccielabcenter.com>

CCIE Security


Real Lab1: Module1

CCIE Lab Center

CLC

CCIE Security

Real Lab1: Design

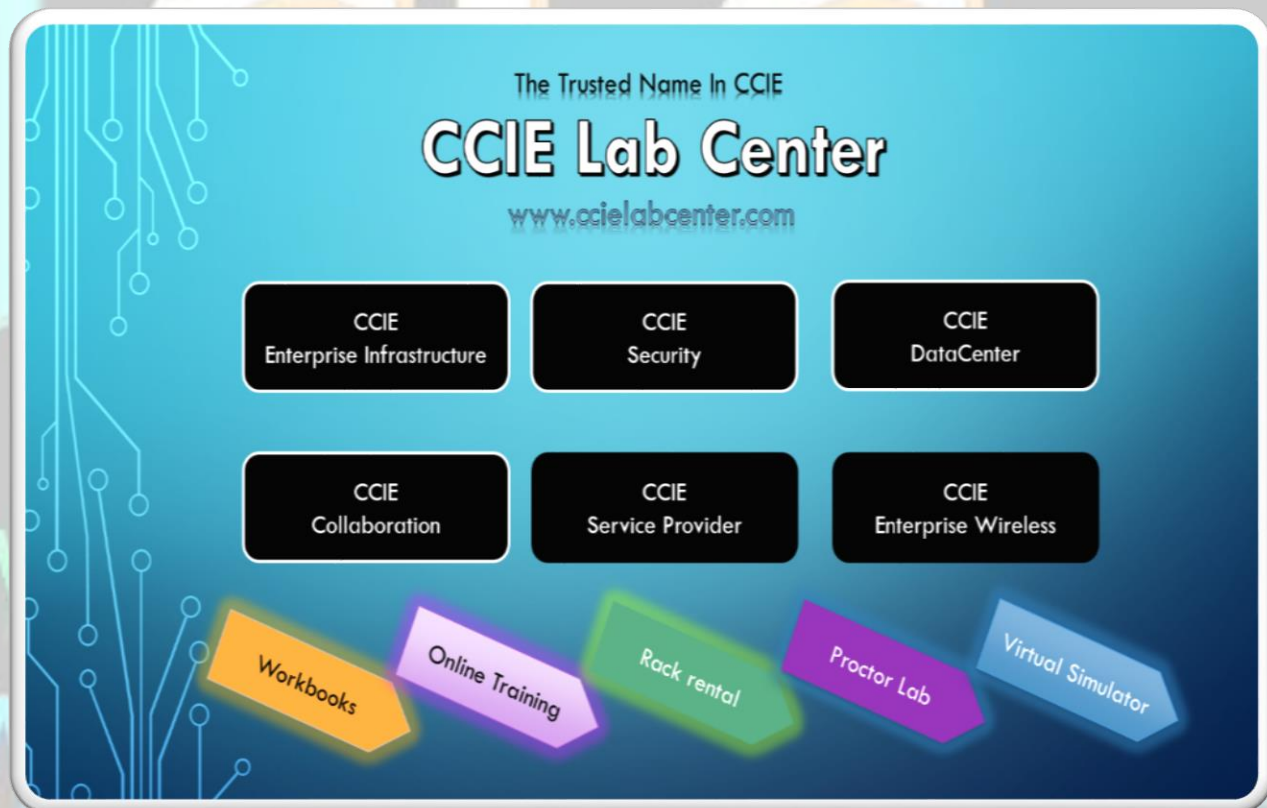

The Trusted Name In CCIE

CCIE Lab Center

www.ccielabcenter.com

CCIE Enterprise Infrastructure	CCIE Security	CCIE DataCenter
CCIE Collaboration	CCIE Service Provider	CCIE Enterprise Wireless

Workbooks Online Training Rack rental Proctor Lab Virtual Simulator

CCIE Lab Center

Workbook Description

Author: CCIE Lab Center (CLC)

Focus: Exam

Level: Expert (CCIE)

Stream: CCIE Security

Lab Version: Lab 1: Module 1 | Design

Document Revision: 1.1.1

Document Revision Date: June 25, 2024

Content: Topology, Question, Resources

Format: PDF

Protection: Password

Website: <https://ccielabcenter.com>

CLC

[www.ccielabcenter.com](https://ccielabcenter.com)

World Best CCIE Certs

CCIE Lab Center

CCIE Security Lab1: Module1: Design

Design 1.1.1: Only Answers

1 of 31

Welcome!

Please read all the available resources before starting the scenario by clicking 'Next item'

2 of 31

- Traffic that is generated by the TAC session is policed at the Access layer and inspected at the Campus layer.
- Traffic that is generated by the TAC session is destined for Engineering Web services in DC 2.
- Traffic will be marked based on the user at the Access layer.

3 of 31

Architecture 1

4 of 31

Select

Session Authentication ---> Radius
Supplicant Addressing ---> DHCP
Network Reachability ---> EIGRP
Network Security ---> IPS
Endpoint Security ---> Antivirus
Resource Reachability ---> DNS

CCIE Lab Center

5 of 31**Select**

ISE ---> Identity Management
L2-Switch---> Change of Authorization
DNAC ---> Policy Orchrestation
NGIPS ---> Traffic Monitoring
AMP Connector ---> Endpoint Protection
FMC ---> Correalation Policies

6 of 31

- The traffic is an internal flow with a design

7 of 31**Select**

Human ---> ISE, DNAC, NGIPS
Network ---> ISE, DNAC, NGIPS, Switch
Application ---> FMC, FireAMP Cloud

8 of 31**Drag & Drop on Topolgy**

Human Attach Surface ---> ISE
Device Attach Surface ---> Campus
Network Attach Surface ---> Access

9 of 31**Select**

Preventive ---> Firewall, Encryption, Antivirus, IPS,
Detective ---> IDS
Corrective ---> Software Backup, Software Fix, Software Update

CCIE Lab Center

10 of 31

- assigning policies based on session source SGTs

11 of 31

- NGIPS ,and AMP Connector

12 of 31

- DNAC integration with ISE for contextual policy

13 of 31

- ISE provides authenticated user session information to FMC
- FireAMP Cloud provides scanned event information to FMC

14 of 31

Drop down and select

Under Nic ---> Authentication

Tab anable ---> 802.1X

To provide ---> Network

To provide authentication for ---> Authentication server

15 of 31

Drop down and select

Under Nic ---> Networking

Select ---> TCP/IPv4

Select ---> Properties

Enable ---> Obtain IP Address Automatically

CCIE Lab Center

16 of 31

Drop down and select

It enables assignment of ip address to ---> Supplicant

The switch must have VLAN ---> Interface

In the same subnet it assigns ---> DNS

Address to the ---> Supplicant

As well as its ---> default route

17 of 31

Drop down and select

It enables ---> DOT1X

authentication ---> Globally

with a ---> Radius

server group. The authentication requires ---> no credentials

and network authorization based on a ---> named method

18 of 31

- It enables dynamic update of DACL and VLAN for the session

CCIE Lab Center

19 of 31

- It is configured in access mode with 802.1X enabled for multiple hosts

20 of 31

- The Console line will not be impacted by AAA default login method.
- The VTY line will not be impacted by AAA default login method.
- The AUX will be impacted by AAA default login method

21 of 31

- It is an external RESTful Service that uses HTTPS ports 443 and 9060.
- The response body is in JSON format

22 of 31

- It is a GET method that returns ISE NAD information.
- The NAD has a host mask

23 of 31

- It is a PUT method that creates the DACL.
- This API user can be part of the API Admin and Operator groups

24 of 31

- It is a POST method that creates the SGT.
- This API user can be part of only API Operator group.
- The SGT can be part of the session authorization result

CCIE Lab Center

25 of 31**Drag & Drop: From Options to Order**

Answer Order

1. Dynamically assigned by ISE
2. Based on session authorization
3. Statically mapped in ISE
4. SXP
5. Speaker
6. Listener

26 of 31**Drag & Drop: From Options to Order**

Answer Order

1. Mac Address
2. IP Address
3. VLAN
4. DACL
5. SGT
6. Authentication Method

27 of 31

- "110" is SGT's binary value of the session IP address

28 of 31

- NDAC is use to authenticate and authorize NAD the into TrustSec domain.
- PAC is use to build a TLS tunnel with ISE that is use to authenticate the NAD with ISE

29 of 31

- The Engineering server SGT must be defined and mapped with it's IP address on ISE

CCIE Lab Center

30 of 31

- The policy condition must have Radius NAS-IP-Address Ethernet attribute

31 of 31

- authorization rule must have Active Directory User group attribute

32 of 32

You have reached the end of exam module 1.

Click "End Exam Section" in the main screen in order to proceed to module 2.

www.ccielabcenter.com

World Best CCIE Certs

CCIE Lab Center

Module1: Design – 1.1.1

CLC CCIE Security Lab1

*****The End*****

100% Real | 100% Pass

Visit: www.ccielabcenter.com