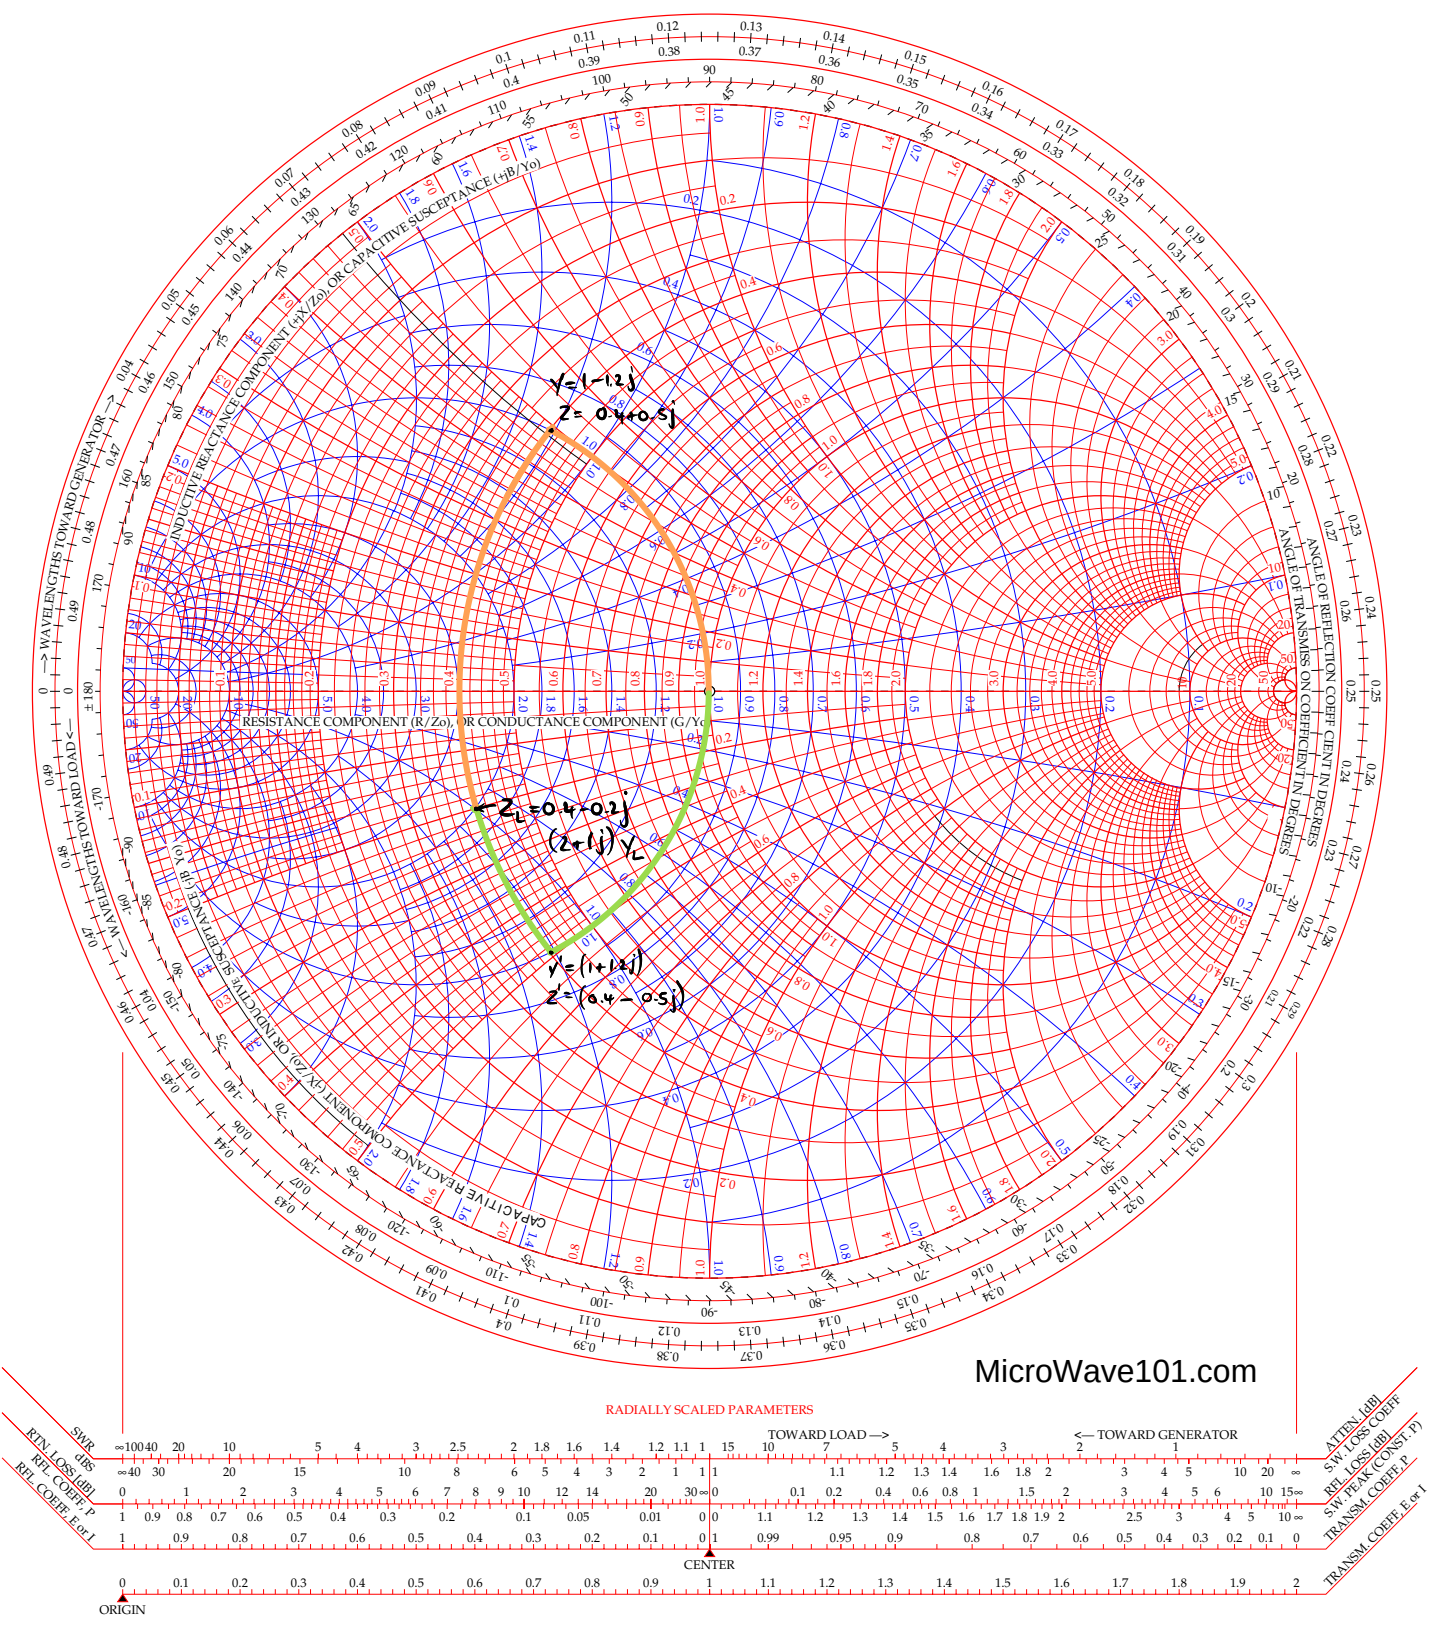

Y=1-1.2j
Z= 0.4+0.5j
Z_L=0.4-0.2j
(2+1j) Y_L
Y'=(1+1.2j)
Z'=(0.4-0.5j)
RESISTANCE COMPONENT (R/Zo), OR CONDUCTANCE COMPONENT (G/Yo)
INDUCTIVE REACTANCE COMPONENT (+jX/Zo), OR CAPACITIVE SUSCEPTANCE (+jB/Yo)
CAPACITIVE REACTANCE COMPONENT (-jX/Zo), OR INDUCTIVE SUSCEPTANCE (-jB/Yo)
ANGLE OF REFLECTION COEFFICIENT IN DEGREES
ANGLE OF TRANSMISSION COEFFICIENT IN DEGREES
WAVELENGTHS TOWARD GENERATOR
WAVELENGTHS TOWARD LOAD
MicroWave101.com
RADIALLY SCALED PARAMETERS
TOWARD LOAD
TOWARD GENERATOR
SWR
RTN. LOSS (dB)
RFL. COEFF. P
RFL. COEFF. E or I
ATTEN. (dB)
S.W. LOSS COEFF
REL. LOSS (dB)
S.W. PEAK (CONST. P)
TRANSM. COEFF. P
TRANSM. COEFF. E or I
CENTER
ORIGIN