

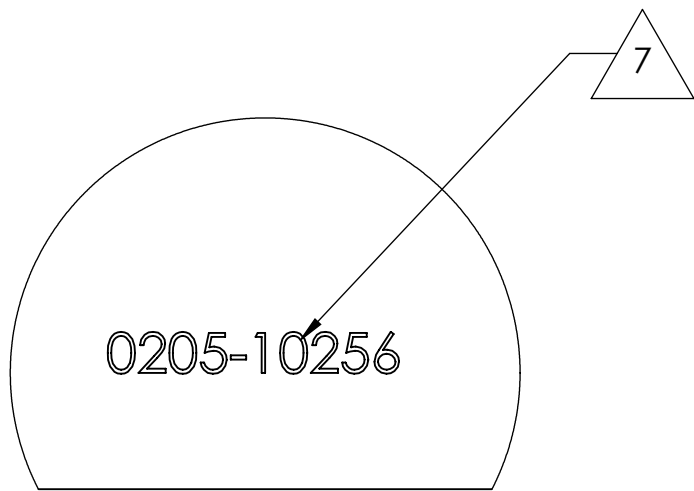
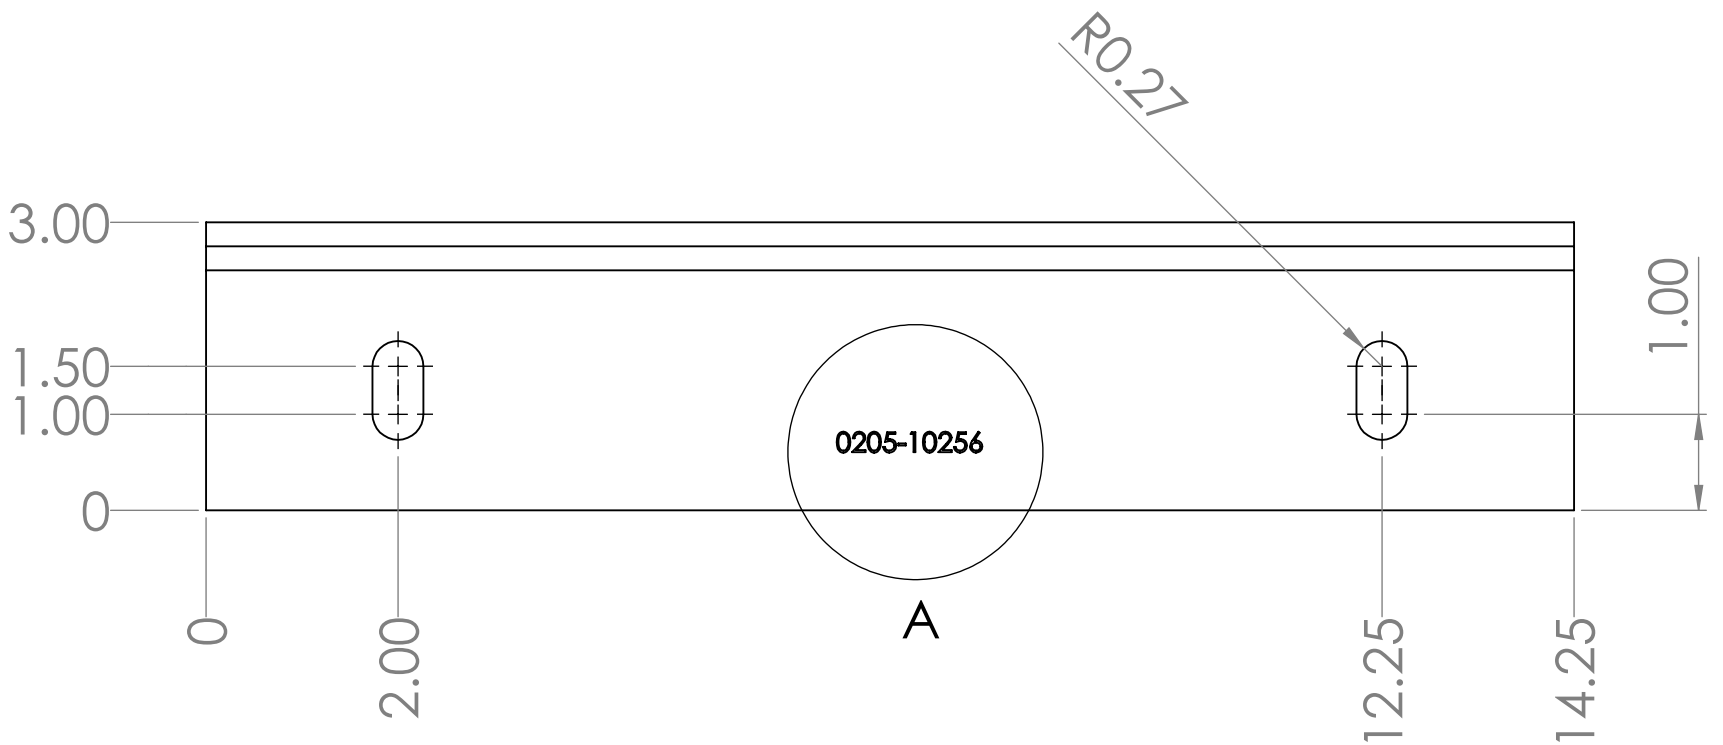



NOTES: UNLESS OTHERWISE SPECIFIED

1. APPLICABLE STANDARDS/SPECIFICATIONS:
ASME Y14.5M-2009, DIMENSIONING AND TOLERANCING.
ASME Y14.38-1999, ABBREVIATIONS AND ACRONYMS.
APPLIED MATERIALS 0251-05096: INCH/MILLIMETER CONVERSION PROCEDURE.
2. SHALL COMPLY WITH PRODUCT EHS REQUIREMENTS PER APPLIED MATERIALS 0250-27105.
3. APPLIED MATERIALS PACKAGING ENGINEERING MUST APPROVE ALL ENGINNERING CHANGES.
4. LIGHTLY GRIND SHARP EDGES AND CORNERS TO DEBURR AND REMOVE SAFETY HAZARDS.
5. PAINT PER APPLIED MATERIALS SPECIFICATION 0205-01021, FS31-2014, WRINKLED, CLASS B SURFACE.
6. COSMETIC REQUIREMENTS PER APPLIED MATERIALS SPECIFICATION 0205-01019, APPENDIX F, CODE III-C.
7. IDENTIFY WITH PN PER APPLIED MATERIALS SPECIFICATION 0240-01033, METHOD 3, 0.19" WHITE CHARACTERS.
LOCATE APPROXIMATELY WHERE SHOWN.

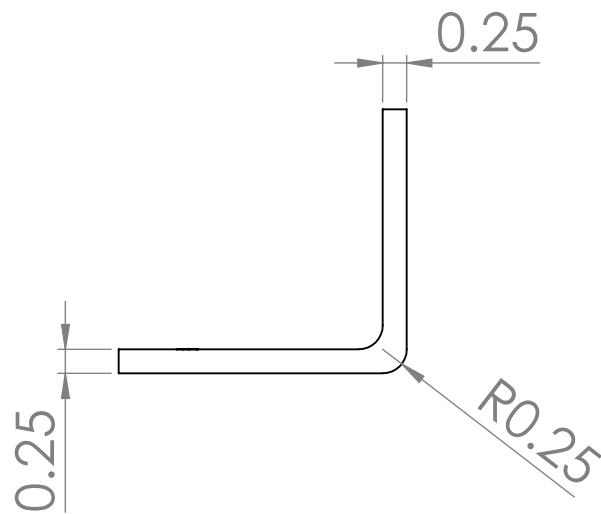

DETAIL A
SCALE 1 : 1

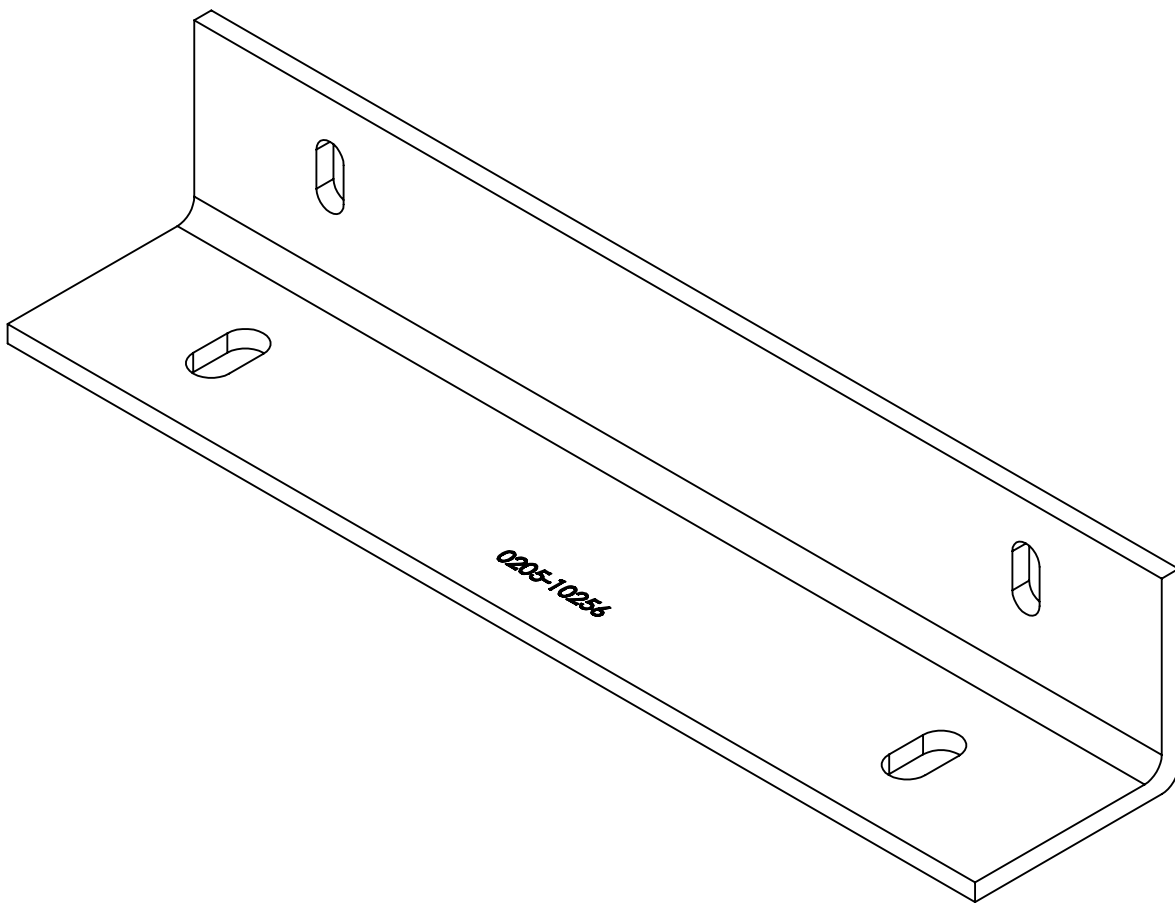

APPROVALS		DATE	TOLERANCES		
DESIGNED BY:	LOUIS.F	13/3/2023	DECIMALS	ANGLES	SURFACES
DRAWN BY:	LOUIS.F	13/3/2023	.XX +/- .13	+/- 1°	✓
REVISED BY:	-	-	.XXX +/- .125		
MFG ENGR:	-	-	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES, REMOVE BURRS AND SHARP EDGES.		
CHECKED BY:	KEELYN.N	13/3/2023			
THIRD ANGLE PROJECTION			MATERIAL:		
			A36 STEEL ZP		
APPLIED MATERIALS CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF APPLIED MATERIALS INC.			FINISH:		
			BLACK POWDER COAT		
APPLIED MATERIALS® 3050 BOWERS AVE., SANTA CLARA, CA 95054			TITLE: SHPPING BRACKET,CGA RACK, 2K DLT HV		
SIZE: D			PART NO.: 0205-10256		
WEIGHT: -			REV: 01		
LB REF			SHEET: 1 of 1		