8 Bit Arithmetic Operations using 8051

Expt No: 12 Name: Shivanirudh S G

Date: 23/10/2020 **Reg No:** 185001146

Aim:

To perform arithmetic operations on two 8 bit numbers using 8051 microcontroller.

8 Bit Addition

Algorithm:

- Move hex value 00 to register 0.
- Move the value of register 1 to A.
- Add value in register 2 to A using ADD A, R2
- Using JNC instruction check for carry and if there is no carry, no need to increment R0.
- Else, increment R0 by 1.
- The result and carry stored in A and R0 should be moved to R4 and R3 respectively.

Program:

Program	Comments
mov r0, #00	Move hex value 00 to Register 0
mov a, r1	Move value in Register 1 to A
add a, r2	A = A + R2
jnc label	Jump if no carry to label LABEL
inc r0	Increment value in R0
label: mov r4, a	Move result in A to Register 4
mov 03, r0	Move carry in R0 to R3
here: sjmp here	Halt

Input and Output:

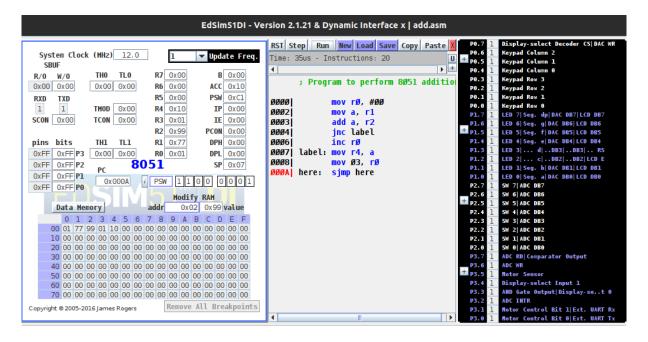


Figure 1: **Input:** *r1:* 77h, *r2:* 99h; **Output:** *Result:* 10h, *Carry:* 01h

8 Bit Subtraction

Algorithm:

- Move hex value 00 to register 0.
- Move the value of register 1 to A.
- Subtract value in register 2 from A using SUBB A, R2
- Using JNC instruction check for carry and if there is no carry, no need to increment R0.
- Else, increment R0 by 1, complement and increment A by 1.
- The result and sign stored in A and R0 should be moved to R4 and R3 respectively.

Program:

Program	Comments
mov r0, #00	Move hex value 00 to Register 0
mov a, r1	Move value in Register 1 to A
subb a, r2	A = A - R2
jnc label	Jump if no carry to label LABEL
inc r0	Increment value in R0
cpl a	Complement value in A
inc a	2's complement of A
label: mov r4, a	Move result in A to Register 4
mov 03, r0	Move carry in R0 to R3
here: sjmp here	Halt

Input and Output:

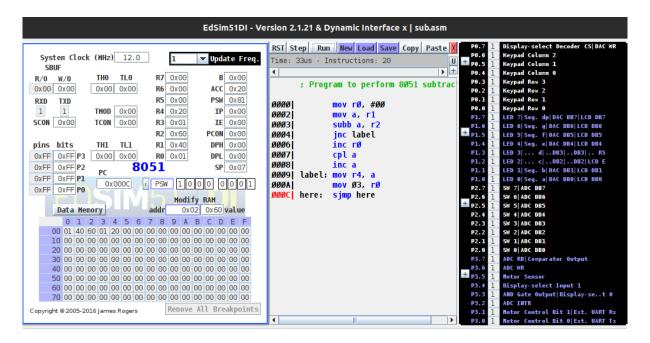


Figure 2: **Input:** *r1:* 40h, *r2:* 60h; **Output:** *Result:* 20h, *Sign:* 01h

Result:

The 8051 programs were written to perform 8-bit arithmetic operations, and the results observed.