01/04/2024

Page No.
Date

Unit ⇒ 1
Electrostatics

* Vector Algebra.

Vector Algebra having magnitude as well as direction.

representation $\vec{A} = A\hat{a}_A$

A = magnitude of $\vec{A}$

$\hat{a}_A$ = unit vector along $\vec{A}$ $\left\{ \hat{a} = \frac{\vec{a}}{|\vec{a}|} \right.$

(i) Dot product :-

Dot product also a scalor product. It has only magnitude.

$$\vec{A}.\vec{B} = |\vec{A}||\vec{B}|\cos\theta.$$

(ii) Cross product :-

Cross product also a vector product. It has magnitude as well as direction both.

$$\vec{A}\times\vec{B} = |\vec{A}||\vec{B}|\sin\theta.$$

* Co-ordinate System :-

Orthogonal (1) Non-Orthogonal ($\neq 1$)

Date


i) Orthogonal

a.) Cartesian co-ordinate System (x, y, z)

b.) Cylindrical co-ordinate System (ρ, ϕ, z)

c.) Spherical co-ordinate System (r, θ, ϕ)

a.) Cartesian co-ordinate system.
Having all three linear vector.

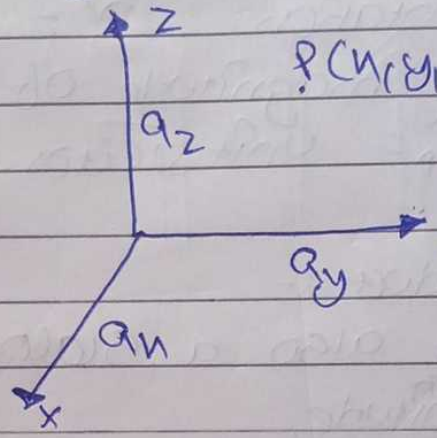

$$P = P_x a_x + P_y a_y + P_z a_z$$

$$|\vec{P}| = \sqrt{P_x^2 + P_y^2 + P_z^2}$$


$$\boxed{a_x \cdot a_x = a_y \cdot a_y = a_z \cdot a_z = 1}$$

$$-\infty < x < \infty \;,\; -\infty < y < \infty \;,\; -\infty < z < \infty$$

$a_x \times a_y = a_z$	$a_y \times a_x = -a_z$
$a_y \times a_z = a_x$	$a_z \times a_y = -a_x$
$a_z \times a_x = a_y$	$a_x \times a_z = -a_y$

Date

b.)) Cylindrical co-ordinate System (ρ, ϕ, z) Having two linear and one angular vector.

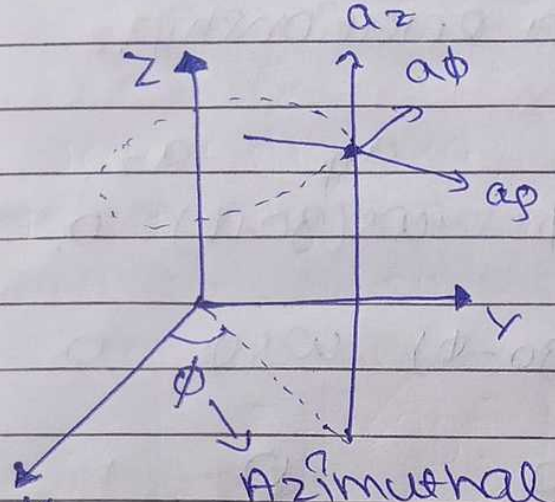

ρ = radius of cylinder.
ϕ = Azimuthal angles

Azimuthal angle ϕ when the line is drawn ⊥ to x-y plane & there is angle with the x-axis called Azimuthal angle).


$$P = P_\rho a_\rho + P_\phi a_\phi + P_z a_z$$

$$|\vec{P}| = \sqrt{P_\rho^2 + P_\phi^2 + P_z^2}$$

$a_\rho \times a_\phi = a_z$
$a_z \times a_\rho = a_\phi$
$a_\phi \times a_z = a_\rho$

$0 < \rho < \infty$.
$0 < \phi < 2\pi$
$-\infty < z < \infty$.

* Relationship b/w conversion & cylindrical co-ordinate system.

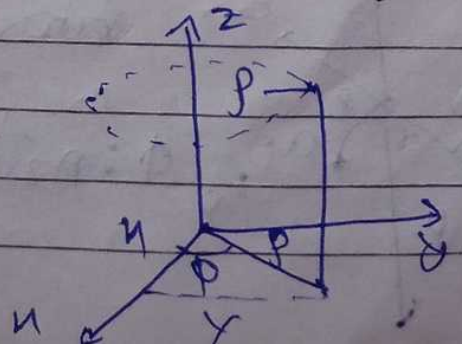


$x = \rho \cos\phi$
$y = \rho \sin\phi$
$z = z$


$$x^2+y^2 = \rho^2$$
$$\phi = \tan^{-1}\left(\frac{y}{x}\right)$$

Unit vector relationship.

	a_ρ	a_ϕ	a_z
a_x	$\cos\phi$	$\cos(90+\phi)$	0
a_y	$\cos(90-\phi)$	$\cos\phi$	0
a_z	0	0	1

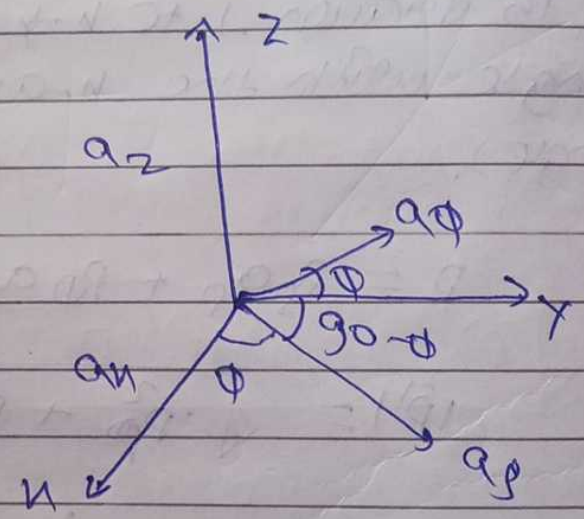


(ii) Spherical co-ordinate system.
Having two angular and one linear movement

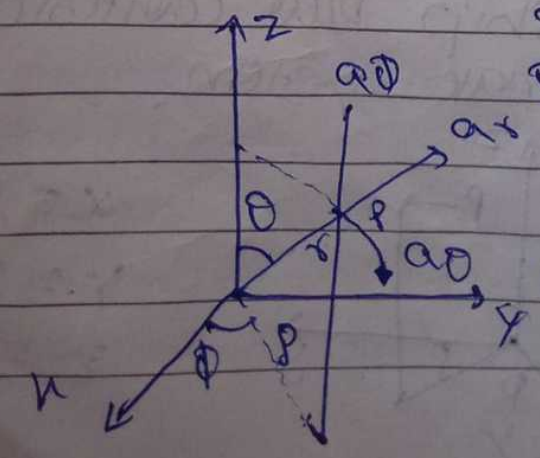

r: radius (positive vector)
θ: angle of position vector with z-axis
ϕ: Azimuthal angle

Date

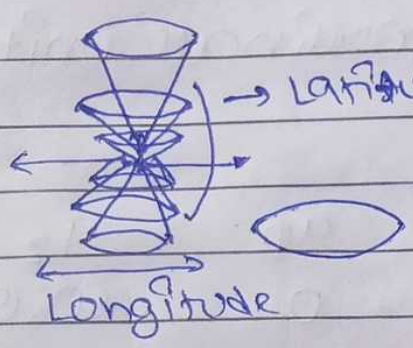

$0 < r < \infty$
$0 < \theta < \pi$
$0 < \phi < 2\pi$

$a_\theta \times a_\phi = a_r$
$a_r \times a_\phi = -a_\theta$

Relationship b/w cartesian, cylindrical and spherical co-ordinate system,

$x = \rho\cos\phi = r\sin\theta\cos\phi$
$y = \rho\sin\phi = r\sin\theta\sin\phi$
$z = r\cos\theta = z$

} Cartesian & cylindrical

$\rho = r\sin\theta$
$\phi = \phi$
$z = r\cos\theta$

} cylindrical & spherical

$z = r\cos\theta$

$r = \sqrt{x^2+y^2+z^2}$


$\phi = \tan^{-1}\left(\frac{y}{x}\right)$


$\theta = \tan^{-1}\left(\frac{\sqrt{x^2+y^2}}{z}\right)$

} spherical & cartesian

* Spherical co-ordinate unit vector relationship.

	a_ρ	a_ϕ	a_z
a_r	$\sin\theta$	0	$\cos\theta$
a_θ	$\sin(90+\theta) = \cos\theta$	0	$\cos(90+\theta) = -\sin\theta$
a_ϕ	0	1	0

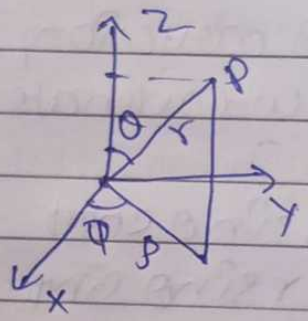

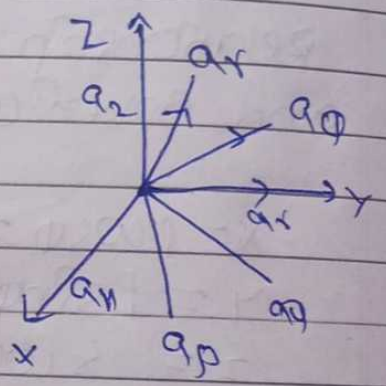

	a_x	a_y	a_z
a_r	$(a_r \cdot a_x)$	$(a_r \cdot a_y)$	$\sin\theta\cos\phi$
a_θ	$\cos\theta\cos\phi$	$\cos\theta\sin\phi$	$\sin\theta$
a_ϕ	$-\sin\theta$	$\cos\phi$	0

vector ~~calculus~~. calculas

i) Differential length * Integral length.

ii) Differential surface * Integral surface

iii) Differential volume * Integral volume.

Page No.
Date

03/04/2024


* cartesian co-ordinate system (x, y, z)

i) Different length (vectors)

$$dl = dx\,a_x + dy\,a_y + dz\,a_z$$

ii) different surface (vectors).

$$ds = dx\,dy\,a_z$$
$$= dx\,dz\,a_y$$
$$= dy\,dz\,a_x$$

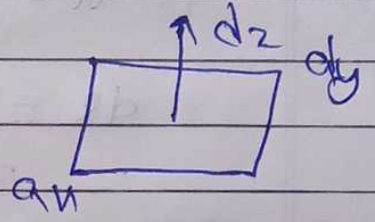

iii) Different volume (scalar).

$$dv = dx\,dy\,dz$$

* cylindrical system (ρ, Φ, z).

i) different length.

$$dl = d\rho\,a_\rho + \rho\,d\Phi\,a_\Phi + dz\,a_z$$

ii) different surface.

$$ds = d\rho \cdot dz\,a_\Phi$$
$$= \rho\,d\Phi\,dz\,a_\rho$$
$$= \rho\,d\rho \cdot d\Phi\,a_z$$

iii) different volume.

$$dv = \rho\,d\rho\,d\Phi\,dz$$

Page No.
Date

* Spherical co-ordinate system (r, θ, ϕ)

(i) different length

$$dl = dr\,a_r + r\,d\theta\,a_\theta + r\sin\theta\,d\phi\,a_\phi$$

(ii) different surface.

$$ds = r\,d\theta \cdot r\sin\theta\,d\phi\,a_r$$
$$= r\,dr\sin\theta\,d\phi\,a_\theta$$
$$= r\,dr\,d\theta\,a_\phi$$


(iii) different volume.

$$dv = r^2\sin\theta\,dr\,d\theta\,d\phi$$

\# Integrals

(i) Line Integral


$$\int A \cdot dl = \int A\,dl\cos\theta$$



circulation of A around L

(ii) Surface Integral.

$$\int A \cdot ds = \int A\,ds\cos\theta$$



Net Flux Through surface

Page No.
Date

(iii) Volume Integral.

$$\int \rho dv = \iiint \rho dv dv.$$

Del Operator ($\vec{\nabla}$).

$$\vec{\nabla} = \frac{\partial}{\partial x}\hat{x} + \frac{\partial}{\partial y}\hat{y} + \frac{\partial}{\partial z}\hat{z}$$

Or

$$\vec{\nabla} = \frac{\partial}{\partial x}a_x + \frac{\partial}{\partial y}a_y + \frac{\partial}{\partial z}a_z$$

Divergence of vector $\vec{A}$

$$\vec{\nabla}\cdot\vec{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z}$$

$$\vec{A} = A_x\cdot\hat{x} + A_y\cdot\hat{y} + A_z\cdot\hat{z}.$$

Or

$$\vec{A} = A_x\cdot a_x + A_y a_y + A_z a_z.$$

$$\vec{\nabla} = \frac{\partial}{\partial x}\hat{x} + \frac{\partial}{\partial y}\hat{y} + \frac{\partial}{\partial z}\hat{z}.$$

Or

$$\vec{\nabla} = \frac{\partial}{\partial x}a_x + \frac{\partial}{\partial y}a_y + \frac{\partial}{\partial z}a_z.$$

$$\vec{\nabla}\cdot\vec{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z}$$

Date

Curl of vector.

$$\vec{A} = A_x \hat{x} + A_y \hat{y} + A_z \hat{z}$$

OR

$$\vec{A} = A_x a_x + A_y a_y + A_z a_z$$

$$\vec{\nabla} = \frac{\partial}{\partial x}\hat{x} + \frac{\partial}{\partial y}\hat{y} + \frac{\partial}{\partial z}\hat{z}$$

OR

$$\vec{\nabla} = \frac{\partial}{\partial x} a_x + \frac{\partial}{\partial y} a_y + \frac{\partial}{\partial z} a_z$$

$$\vec{\nabla} \times \vec{A} = \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ A_x & A_y & A_z \end{vmatrix}$$

* Gradient of ~~vector~~ scalor (V).

Gradient of scalor is vector quantity. It consist of magnitude as well as direction.

The Direction of Gradient is along the normal to the given function. Gradient measure slope.

$$dv = \frac{\partial v}{\partial x} dx + \frac{\partial v}{\partial y} dy + \frac{\partial v}{\partial z} dz$$

Page No.
Date

gradient.

$$dv = \left(\frac{\partial v}{\partial x}a_x + \frac{\partial v}{\partial y}a_y + \frac{\partial v}{\partial z}a_z\right)\left(dx a_x + dy a_y + dz a_z\right)$$

$$dv = \nabla v \cdot dl.$$

$$dv = \nabla v\, dl \cos\theta.$$

$$\boxed{\nabla v \cos\theta = \frac{dv}{dl}} \quad \text{if } \theta = 0$$

$$\boxed{\nabla v = \frac{dv}{dl}}$$

Q Find gradient of r^2, where r is position vector.

$$\vec{r} = x a_x + y a_y + z a_z.$$

$$|\vec{r}| = \sqrt{x^2+y^2+z^2}$$

$$|\vec{r}|^2 = x^2+y^2+z^2.$$

$$\nabla r^2 = \nabla (x^2+y^2+z^2)$$

$$= \left(\frac{\partial}{\partial x}\hat{x} + \frac{\partial}{\partial y}\hat{y} + \frac{\partial}{\partial z}\hat{z}\right)(x^2+y^2+z^2)$$

$$= 2x\hat{x} + 2y\hat{y} + 2z\hat{z}. \quad \text{Ans}$$

Page No.
Date

* Divergence of vector ($\vec{A}$).
Divergence of any vector is scalar quantity. Divergence of vector ($\vec{A}$) at any point is net outward flux per unit volume.

$\nabla \cdot A$ = Divergence of vector.

Q Calculate Divergence of vector $\vec{r}$ where $\vec{r}$ is position vector.

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k}.$$

Divergence is $\vec{\nabla} \cdot \vec{r}$

$$\vec{\nabla} \cdot \vec{r} = \left(\frac{\partial}{\partial x}\hat{i} + \frac{\partial}{\partial y}\hat{j} + \frac{\partial}{\partial z}\hat{k}\right)\left(x\hat{i} + y\hat{j} + z\hat{k}\right).$$

$$\vec{\nabla} \cdot \vec{r} = \frac{\partial x}{\partial x} + \frac{\partial y}{\partial y} + \frac{\partial z}{\partial z}$$

$$\vec{\nabla} \cdot \vec{r} = 1 + 1 + 1$$

$$\vec{\nabla} \cdot \vec{r} = 3.$$

Scalar Quantity.

NOTE :- If Divergence is zero then it is called solenoidal vector.

Page No.
Date

Divergence Theorem or Gauss Theorem.

According to this theorem, The Divergence of any vector is over the volume Integral is equal to the surface Integral of same vector.

$$\iiint (\nabla \cdot \vec{A})\, dv = \iint \vec{A} \cdot d\vec{S}$$

Curl of a vector ($\vec{A}$).

Curl of vector is a vector quantity. The curl of a vector is a cross product between Del ($\vec{\nabla}$) and Any Given vector.

$(\vec{\nabla} \times \vec{A})$ = curl of vector.

where,

$$\vec{\nabla} = \frac{\partial}{\partial x}\hat{i} + \frac{\partial}{\partial y}\hat{j} + \frac{\partial}{\partial z}\hat{k}.$$

$$\vec{A} = A_x \hat{i} + A_y \hat{j} + A_z \hat{k}.$$

$$\vec{\nabla} \times \vec{A} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ A_x & A_y & A_z \end{vmatrix}$$

Q. Find the curl of vector $\vec{r}$ where $\vec{r}$ is position vector.

Sol. $\vec{r} = x\hat{i} + y\hat{j} + z\hat{k}$.

$$\vec{\nabla} = \frac{\partial}{\partial x}\hat{i} + \frac{\partial}{\partial y}\hat{j} + \frac{\partial}{\partial z}\hat{k}.$$

$$\vec{\nabla} \times \vec{r} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ x & y & z \end{vmatrix}$$

$$\vec{\nabla} \times \vec{r} = \hat{i}\left(\frac{\partial z}{\partial y} - \frac{\partial y}{\partial z}\right) - \hat{j}\left(\frac{\partial z}{\partial x} - \frac{\partial x}{\partial z}\right) + \hat{k}\left(\frac{\partial y}{\partial x} - \frac{\partial x}{\partial y}\right)$$

$$\vec{\nabla} \times \vec{r} = 0 + 0 + 0 = 0.$$

Note :-
If curl of any vector is zero $\vec{\nabla} \times \vec{A} = 0$ then it is known as Irrotational vector.
It means there is no rotation

Page No.
Date


* Stokes Theorem.

According to this theorem, the curl of any vector over surface Integral is equal to the Line Integral of same vector.

$$\iint (\vec{\nabla} \times \vec{A}) \cdot d\vec{S} = \int \vec{A} \cdot d\vec{l}$$

Coulomb's law for electrostatic.

According to coulomb's law, The force b/w two point charge is directly proportional to the product of magnitude of two point charge and inversely proportional to the square of radius (Inverse square law).

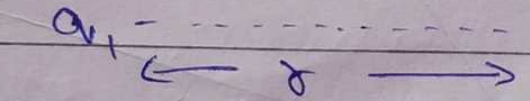

$$f \propto |q_1||q_2| \quad \text{--- (1)}$$

$$f \propto \frac{1}{r^2} \quad \text{--- (2)}$$

from equation (1) & (2)

$$f \propto \frac{q_1 q_2}{r^2}$$

Page No.
Date


$$F = \frac{kq_1q_2}{r^2}$$

where

$$k = \frac{1}{4\pi\epsilon_0} = 9\times10^9\ Nm^2/C^2$$

$$\epsilon_0 = 8.85\times10^{-12}\ C^2/Nm^2.$$

* Vector form of coulomb's law.

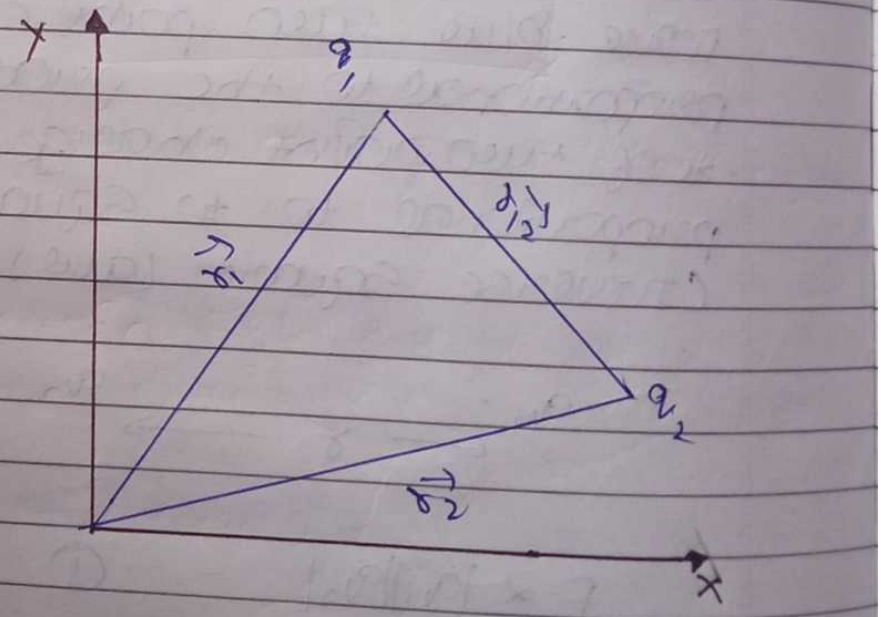

$$F = \frac{kq_1q_2}{r^2}$$

$$\vec{F}_{21} = \frac{kq_1q_2}{r_{12}^2} \times \vec{r}_{12}$$

$$\vec{F}_{21} = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2}{|\vec{r}_{12}^{\,2}|} \times \frac{\vec{r}_{12}}{|\vec{r}_{12}|}$$

$$\vec{F}_{21} = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2 \vec{r}_{12}}{|r_{12}|^3} \quad \text{--- (1)}$$

Now from vector law of addition

$$\vec{r}_1 + \vec{r}_{12} = \vec{r}_2$$

$$\vec{r}_{12} = \vec{r}_2 - \vec{r}_1$$

put the value of $\vec{r}_{12}$ in eq (1)

then,

$$\vec{F}_{21} = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2 (\vec{r}_2 - \vec{r}_1)}{|\vec{r}_2 - \vec{r}_1|^3} \quad \text{--- (2)}$$

My.

$$\vec{F}_{12} = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2 (\vec{r}_1 - \vec{r}_2)}{|\vec{r}_1 - \vec{r}_2|^3} \quad \text{--- (3)}$$

So from eq (2) & (3)

$\vec{F}_{12} = -\vec{F}_{21}$ → It follow newton 3rd law of motion

Page No.
Date

* Electrostatic field.

The electrostatic field is defined as the electrostatic force per unit charge (q_0).

$$\text{Electric field} = \frac{\text{force}}{\text{charge}}$$

$$E = \frac{kqq_0}{r^2 q_0}$$

$$\boxed{E = \frac{kq}{r^2}}$$

S.I unit is N/C or volt/metre.

* Electric field due to continuous charge distribution.

i) point charge 'q'

ii) line charge or linear charge density

$$\lambda = \frac{\text{charge } (q)}{\text{length } (l)}$$

$$\boxed{q = \lambda l} \text{ or } q = \int_L \lambda_L \, dl$$

(ii) Surface charge Density (σ)

$$\sigma = \frac{q}{A} = \frac{\text{charge}}{\text{Area.}}$$


$$\boxed{q = \sigma A} \Rightarrow q = \int_S \sigma_s \, ds$$

(iii) volume charge Density (ρ).

$$\rho = \frac{\text{charge}}{\text{volume}} = \frac{q}{v.}$$

$$\boxed{q = \rho v.} \Rightarrow q = \int_v \rho_v \, dv$$

* calculation Electric Field Intensity due to line charge.

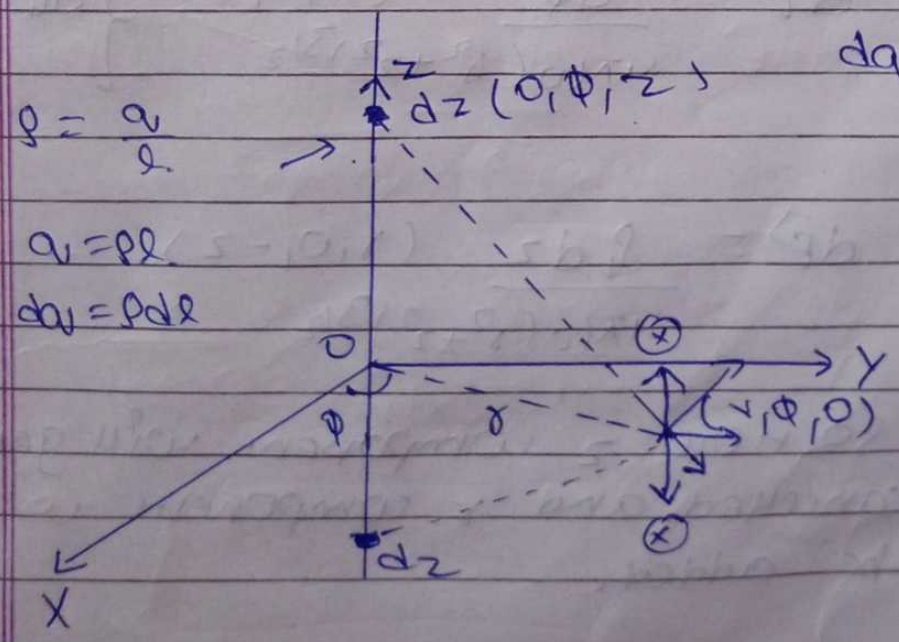

Date

$$\vec{E} = \frac{kQ}{r^2} \cdot \hat{r}$$

$$d\vec{E} = \frac{1}{4\pi\epsilon_0} \frac{dQ}{r^2} \cdot \frac{\vec{r}}{|\vec{r}|}$$

$$d\vec{E} = \frac{1}{4\pi\epsilon_0} \frac{dQ}{r^3} \cdot \vec{r} \quad --(1)$$

Direction of $\vec{r}$.

$$\vec{r} = (r, \phi, 0) - (0, \phi, z)$$

$$\vec{r} = (r, 0, -z)$$

magnitude,

$$|\vec{r}| = \sqrt{r^2 + z^2}$$

put the magnitude of $|\vec{r}|$ in eq(1).

$$d\vec{E} = \frac{dQ}{4\pi\epsilon_0 (r^2+z^2)^{3/2}} \cdot (r, 0, z) \quad \{dQ = \lambda dz\}$$

$$d\vec{E} = \frac{\lambda_L dz}{4\pi\epsilon_0 (r^2+z^2)^{3/2}} (r, 0, -z)$$

So Here z component will get cancelled and r component will be added.

Page No.
Date

$$d\vec{E} = \frac{1}{4\pi\epsilon_0} \frac{\lambda_L dz}{(r^2+z^2)^{3/2}} \quad (r,0,0).$$

Integrate both side.

$$\vec{E} = \int_{-\alpha}^{\alpha} \frac{1}{4\pi\epsilon_0} \frac{\lambda_L dz}{(r^2+z^2)^{3/2}} \quad (r,0,0).$$

Now,

$$z = r\tan\theta.$$

$$dz = r\sec^2\theta d\theta.$$

limit $-\alpha$ to α.

$-\alpha \to -\frac{\pi}{2}$, $\alpha \to \frac{\pi}{2}$

$$\vec{E} = \int_{-\frac{\pi}{2}}^{\pi/2} \frac{1}{4\pi\epsilon_0} \frac{\lambda_L \times r\sec^2\theta d\theta}{[r^2+r^2\tan^2\theta]^{3/2}} \hat{a_r}$$


$$\vec{E} = \frac{\lambda_L}{4\pi\epsilon_0} \int_{-\frac{\pi}{2}}^{\pi/2} \frac{r\sec^2\theta d\theta}{r^3\sec^3\theta} \hat{a_r}$$

$$\vec{E} = \frac{\lambda_L}{4\pi\epsilon_0 r} \int_{-\frac{\pi}{2}}^{\pi/2} \cos\theta d\theta \, \hat{a_r}$$

$$\vec{E} = \frac{\lambda_L}{4\pi\epsilon_0 r} \times 2 \, \hat{a_r} \Rightarrow \boxed{\vec{E} = \frac{\lambda_L}{2\pi\epsilon_0 r} \hat{a_r}}$$

Page No.
Date

* Electric field intensity due to surface charge.

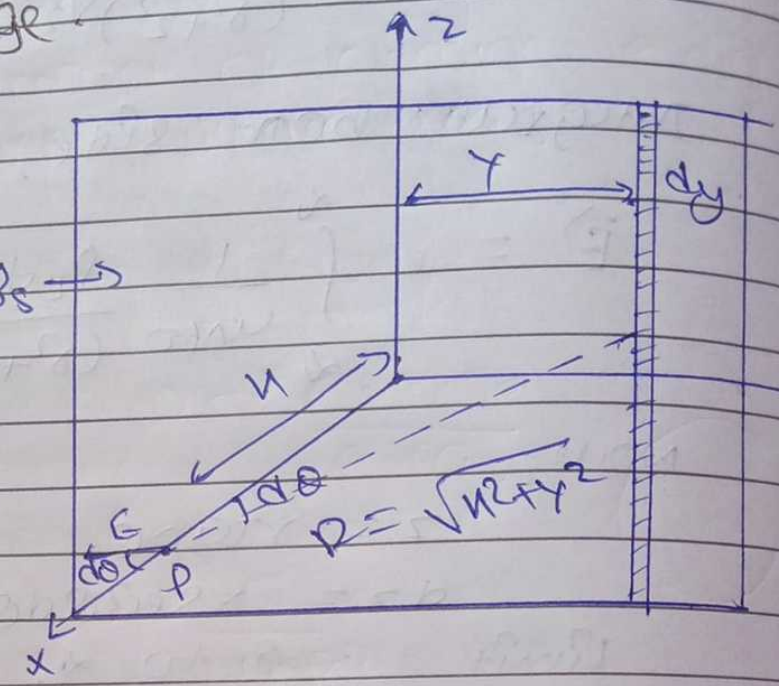

$\cos\theta = \frac{X}{R}$

$\cos\theta = \frac{X}{\sqrt{X^2+Y^2}}$

There is no Y & Z component of electric field.

For line charge electric field.

$$d\vec{E} = \frac{\rho_L}{2\pi\epsilon_0 R} \quad \left\{ \rho_s = \frac{\rho_L}{l}, \quad \rho_L = \rho_s dy \right\}$$

So,

$$d\vec{E} = \frac{dy\,\rho_s \cos\theta}{2\pi\epsilon_0 \sqrt{X^2+Y^2}} \quad \left\{ R = \sqrt{x^2+y^2} \right\}$$

$$d\vec{E} = \frac{dy\,\rho_s}{2\pi\epsilon_0 \sqrt{X^2+Y^2}} \times \frac{X}{\sqrt{X^2+Y^2}}$$

$$d\vec{E} = \frac{dy\, \rho_s\, x}{2\pi\epsilon_0 (x^2+y^2)}$$

Integrate both side.

$$\vec{E} = \int_{-\infty}^{\infty} \frac{dy\, \rho_s\, x}{2\pi\epsilon_0 (x^2+y^2)}$$

$$\vec{E} = \frac{\rho_s}{2\pi\epsilon_0} \int_{-\infty}^{\infty} \frac{x}{x^2+y^2}\, dy.$$

$$\vec{E} = \frac{\rho_s}{2\pi\epsilon_0} \left[\tan^{-1}\left(\frac{y}{x}\right) \right]_{-\infty}^{\infty}$$

$$\vec{E} = \frac{\rho_s}{2\pi\epsilon_0} \times \left[\frac{\pi}{2} + \frac{\pi}{2} \right]$$

$$\vec{E} = \frac{\rho_s}{2\pi\epsilon_0} \times \pi$$

$$\vec{E} = \frac{\rho_s}{2\epsilon_0}$$

Electric Flux Density.

Electric Flux Density is defined as the amount of charge is displaced per unit surface Area.

According to Flux,

$$D = \frac{\text{charge}}{\text{Area}}$$

$$D = \frac{Q}{4\pi R^2}$$

The Direction of Electric Flux is along the direction of Electric field.

$$\vec{D} = \frac{Q}{4\pi R^2} \hat{R}.$$

S.I unit of Electric Flux Density is coulomb/metre^2 (C/m^2)

$$\vec{D} = \frac{\text{charge}}{\text{Area}} = \frac{\text{coulomb}}{m^2}$$

S.I unit is C/m^2.

Page No.
Date

* Relationship between Electric Flux Density & Electric Field.

Electric Flux Density.

$$\vec{D} = \frac{Q}{4\pi R^2} \hat{r} \quad -- (1)$$

Electric Field

$$\vec{E} = \frac{kQ}{R^2} = \frac{1}{4\pi\epsilon_0} \times \frac{Q}{R^2} \hat{r}$$

From equation (1).

$$\vec{E} = \frac{1}{\epsilon_0} \times \frac{Q}{4\pi R^2} \hat{r}$$

$$\vec{E} = \frac{\vec{D}}{\epsilon_0}$$

$$\vec{D} = \epsilon_0 \vec{E}$$

Where,

D = Electric Flux Density.

ϵ_0 = Epsilon knot (8.85×10^{-12} N/m²)

E = Electric Field.

Date

In general,
for free space,


$$\vec{D} = \epsilon \vec{E}$$

$$\left\{ \begin{array}{l} \epsilon_r = \frac{\epsilon}{\epsilon_0} \\ \epsilon = \epsilon_r \epsilon_0 \end{array} \right.$$

$$\vec{D} = \epsilon_r \epsilon_0 \vec{E}$$

* Electric Flux.

The total number of Electric field passing through the given surface. Numerically it is equal to the product of Electric field and surface Area.

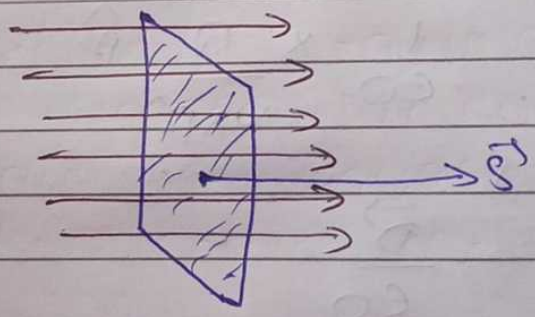

Electric Flux = Electric field x Area

$$\psi = \vec{E} \cdot d\vec{A}$$

$$\boxed{\psi = \vec{E} d\vec{A} \cos\theta}$$

Here $\theta = 0^\circ$

So,

$$\psi = \vec{E} d\vec{A} \cos 0^\circ$$

$$\psi = \vec{E}\vec{dA}$$

Or

$$\psi = ES$$

Where


S = Surface area.

S.I unit of Electric Flux

$$\psi = \vec{E} \times \vec{A}$$

$$\psi = \frac{\text{Volt}}{\cancel{\text{metre}}} \times m^2$$

S.I unit of Electric Flux is ~~Vm~~ Volt-metre (V-m) Or Weber (Wb).

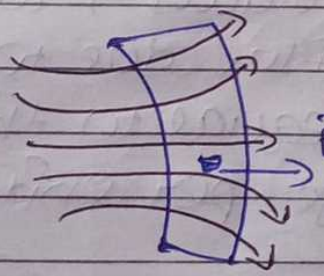

Non-uniform.


$$d\psi = \vec{E} \cdot d\vec{r}$$

Integrate both side.

$$\psi = \int \vec{E} \cdot d\vec{r}$$

Page No.
Date

Case I :-

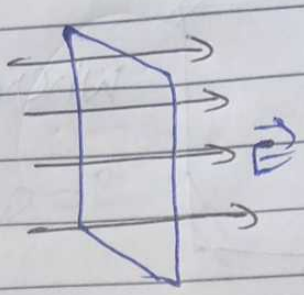


$\Psi = \int E \cdot dS \cos\theta$

$\theta = 0$.

$\boxed{\Psi = ES.}$

Case II :

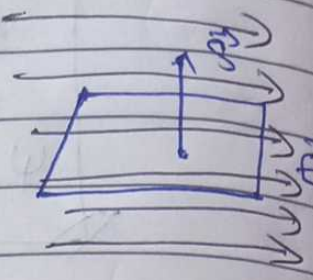

$\Psi = \vec{E} \vec{dS} \cos\theta$


$\theta = 90°$

$\Psi = \vec{E} \vec{dS} \cos 90°$

$\boxed{\Psi = 0}$

Gauss's Law For Electric Field

According to Gauss's Law, the total electric flux due to any closed surface is equal to the net enclosed electric charge per unit epsilon naught.

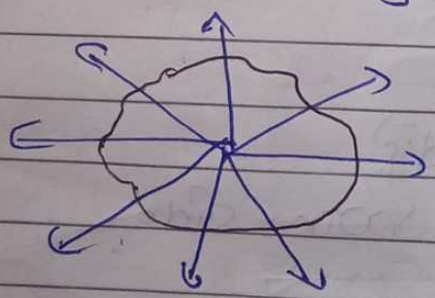

Electric Flux = $\frac{\text{Charge (enclosed)}}{\text{Epsilon naught}}$

$\boxed{\Psi = \frac{q_{enclosed}}{\varepsilon_0}}$

Page No.
Date

So

$$\psi = \oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0}$$


Or.

$$\psi = \oint \vec{D} \cdot d\vec{s} = Q$$

Where


D = Electric flux density.

Case I

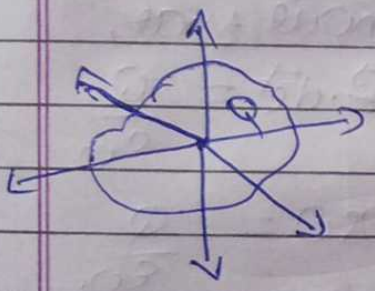

$$\psi = \oint \vec{D} \cdot d\vec{s} = Q_{enc.}$$

Case II

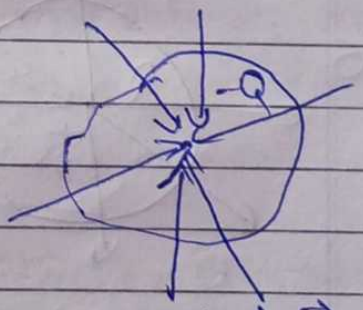


$$\psi = \oint \vec{D} \cdot d\vec{s} = -Q_{enc}$$

NOte:

If flux is leaving enclosed surface than Electric flux is positive & if Electric flux is entering inside enclosed surface then electric flux is negative.

Case III

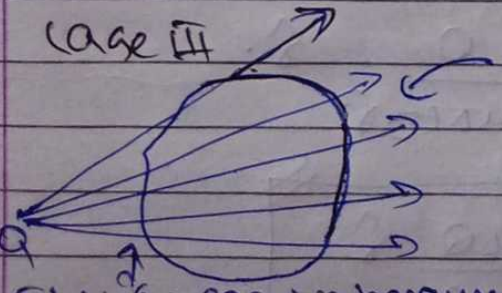


Electric flux is leaving surface. So flux is positive

So net flux is zero.

Flux is negative because

Date

Case IV

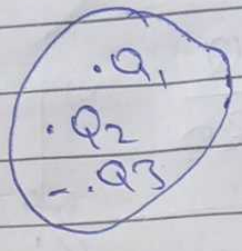


$$\varphi = \oint \vec{E} \cdot d\vec{s} = \frac{(Q + Q_2 - Q_3)}{\varepsilon_0}$$

or

$$\varphi = \oint \vec{D} \cdot d\vec{s} = (Q_1 + Q_2 - Q_3)$$

Application of Gauss's law for Electric field.

1) Electric field due to point charge.

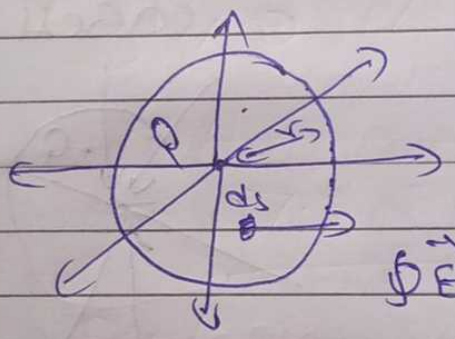

$\theta = 0$

We know that,

$$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0}$$

$$\oint E ds \cos\theta = \frac{Q}{\varepsilon_0}$$

$$\oint E ds \cos 0^\circ = \frac{Q}{\varepsilon_0}$$

$4\pi r^2$

$$\oint_0 E ds = \frac{Q}{\varepsilon_0}$$


$$E \times 4\pi r^2 = \frac{Q}{\varepsilon_0}$$

$$\vec{E} = \frac{Q}{4\pi\varepsilon_0 r^2}\,\hat{r}$$

$$\boxed{\vec{E} = \frac{kQ}{r^2}\,\hat{r}}$$

Page No.
Date

Q) Electric field due to line charge.

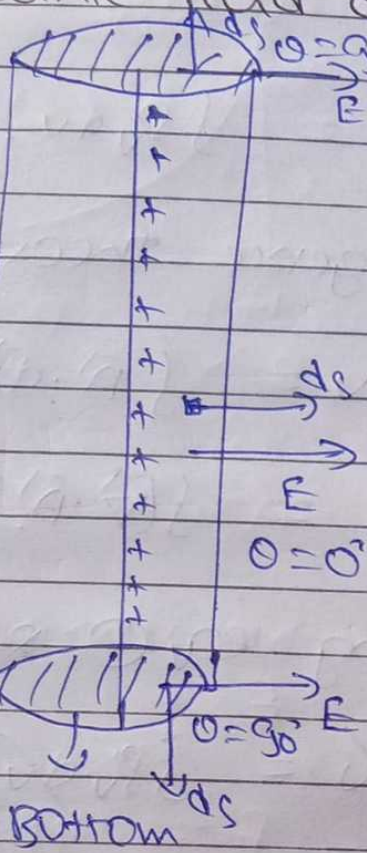

$l_x = \frac{Q}{x}$

$Q = \rho_l \cdot l$.

we know that,

$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0}$

$\oint \vec{E} d\vec{s} \cos\theta = \frac{Q}{\varepsilon_0}$

$\vec{E} \times \vec{A} \times \vec{s} = \frac{\rho_L}{\varepsilon_0}$

$\vec{E} = \frac{\rho_L}{2\pi\varepsilon_0 r}$

Maxwell's 1st equation with Integral form & differential form.

Q) From Gauss law,

$$\oint \vec{D} \cdot d\vec{s} = Q \quad \text{---} (1)$$

For volume charge distribution

$$\rho_v = \frac{dQ}{dv} \Rightarrow Q = \int \rho_v \cdot dv.$$

Put the value of Q in eq (1)

$$\oint \vec{D} \cdot d\vec{s} = \int \rho_v \cdot dv$$

Integral form.

(iii) Differential form.

$$\oint \vec{D} \cdot d\vec{s} = \int \rho_v \, dv \quad \text{--- (1)}$$

From Divergence Theorem.

$$\int (\vec{\nabla} \cdot \vec{A}) dv = \int \vec{A} \cdot d\vec{s}$$

$$\int \vec{A} \cdot d\vec{s} = \int (\vec{\nabla} \cdot \vec{A}) dv \quad \text{--- (2)}$$

on comparing eq. (1) & (2).

$$\int (\vec{\nabla} \cdot \vec{D}) dv = \int \rho_v dv$$

$$\boxed{\vec{\nabla} \cdot \vec{D} = \rho_v}$$

Or

$$\boxed{\vec{\nabla} \cdot \vec{E} = \frac{\rho_v}{\epsilon_0}}$$

This is Differential form of maxwell's equation (1).

* Electric Field Intensity due to conducting Sphere.



Page No. / Date

Case I

$r > R$

From Gauss's law.

$$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0}$$

$\theta = 0^\circ$ $\quad \{ \vec{E} \parallel d\vec{s} \}$

$$\oint \vec{E}\, ds \cos 0^\circ = \frac{Q}{\varepsilon_0}$$

$$\vec{E} \oint_0^{4\pi R^2} ds = \frac{Q}{\varepsilon_0}$$

$$\vec{E} = \frac{Q}{4\pi R^2 \varepsilon_0}$$

Case II

$r = R$

$$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0} \quad \{ \theta = 0^\circ \}$$


$$E \oint_0^{4\pi R^2} ds = \frac{Q}{\varepsilon_0}$$

$$\vec{E} = \frac{Q}{4\pi R^2 \varepsilon_0} \hat{r}$$


Case III $r < R$.

$$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0} = 0 \Rightarrow \vec{E} = 0$$

Inside the sphere

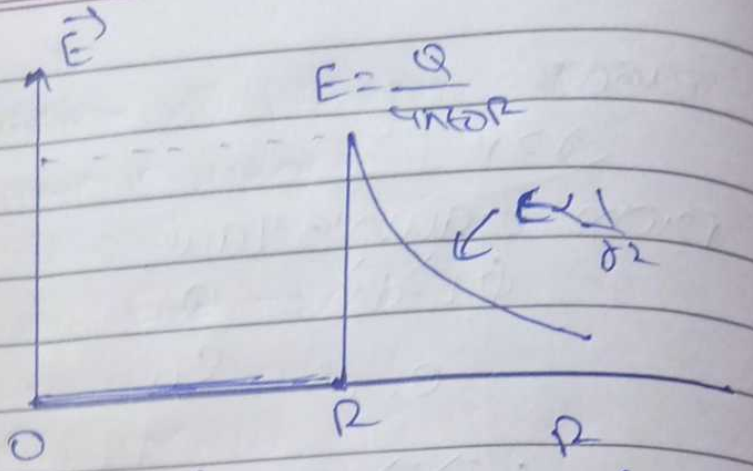

Electrostatic potential.

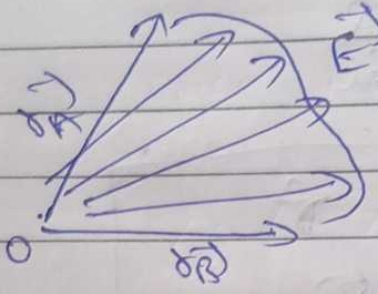

We know that,

$E = \frac{F}{q}$.

$F = qE$.

For dl movement work done

$dW = \vec{F} \cdot d\vec{l}$ $\{F = qE\}$

$dW = q\vec{E} \cdot d\vec{l}$

Integrate both side

$W = \int_A^B q\vec{E} \cdot d\vec{l}$

$W = \frac{kq_1q}{R}$

$E = \frac{kq}{R^2}$

$W = qEr$

potential Difference.

$V_{AB} = \frac{W}{q} = \frac{q}{q}\int_A^B \vec{E} \cdot d\vec{l}$

Page No.
Date

$$V_{AB} = -\int_A^B \vec{E}\cdot\vec{dl}$$

$\{V_{AB} = V_B - V_A\}$

{-ve sign is due to workdone by external force}

$$V_{AB} = -\int_A^B \frac{kq}{r^2}\, dl.$$

$$V_{AB} = -kq\left(\frac{-1}{r}\right)_A^B$$

$$V_{AB} = kq\left[\frac{1}{r_B} - \frac{1}{r_A}\right]$$

from a point to infinity.

$$V = \frac{kq}{r}.$$

$$V = \frac{q}{4\pi\varepsilon_0 r}.$$

S.I unit is J/C or volt.

Date

Poission & Laplace equation

We know that,

$$\vec{E} = -\vec{\nabla} V \quad \text{---(1)}$$

from Gauss law,

$$\vec{\nabla} \cdot \vec{E} = \frac{\rho_v}{\epsilon_0} \quad \text{---(2)}$$

Put the value of E in eq(2)

$$\vec{\nabla} \cdot (-\vec{\nabla} V) = \frac{\rho_v}{\epsilon_0}$$

$$\vec{\nabla} \cdot (\vec{\nabla} V) = -\frac{\rho_v}{\epsilon_0}$$

$$\nabla^2 V = -\frac{\rho_v}{\epsilon_0}$$

{ ∇^2 = Lapl... operator

Poission equation.


Now,



If enclosed surface does not have any volume charge.

so $\rho_v = 0$

$$\nabla^2 V = -\frac{\rho_v}{\epsilon_0} = 0$$

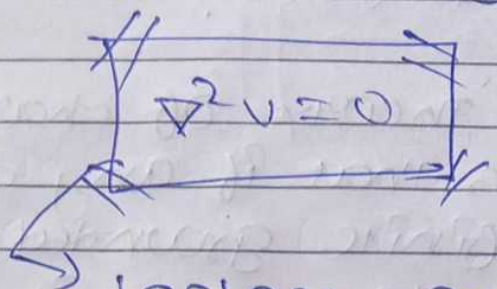

Laplace equation.

* Uniqueness Theorem.

Uniqueness theorem explains unique solution to laplace equation.

From laplace eqn

$$\nabla^2 V = 0$$

There are two solution, V_1 & V_2


$$\nabla^2 V_1 = 0 \quad \& \quad \nabla^2 V_2 = 0$$

Pb $V_3 = V_1 - V_2$, for same boundary

$$\nabla^2 V_3 = 0$$

For metallic boundary because of same boundary

$$V_3 = 0 \Rightarrow V_1 - V_2 = 0$$

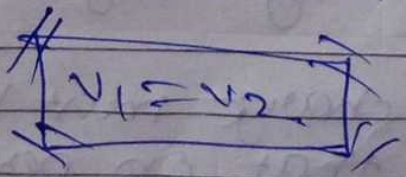


There is no maxima & minima enclosed surface.


Image Theory of charges

It states that if any charge is above infinite grounded perfect conducting plane then it is replaced by charge with its image and with opposite polarity.

i)

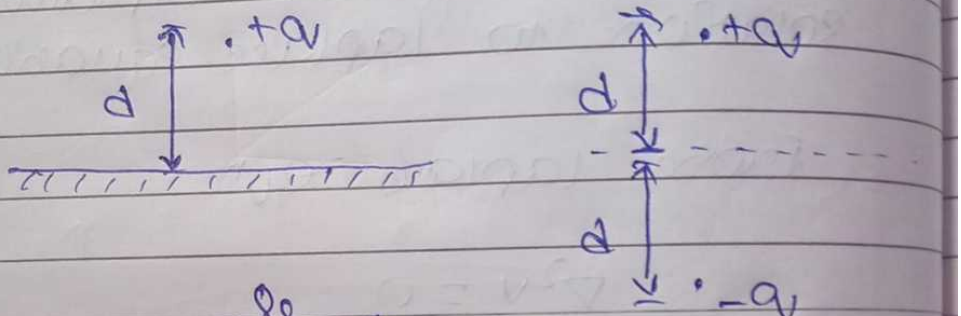

ii)

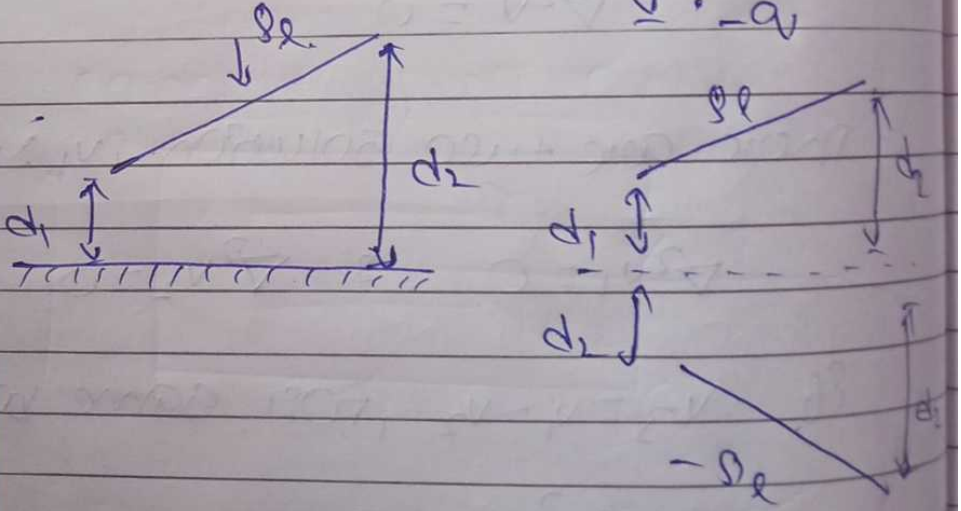


Important points.


i) Image must be there inside the conducting region

ii) Image charge must be located in a way that on perfect conducting


plane has voltage (V=0) on it's surface.

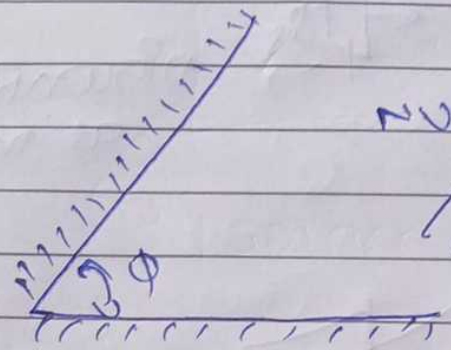

Number of image charges

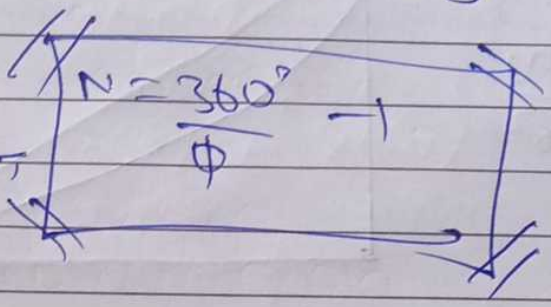


Example :-

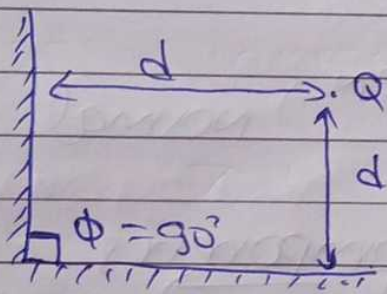


$$N = \frac{360^\circ}{\Phi} - 1$$

$$N = \frac{360^\circ}{90} - 1 = 3$$


$$\boxed{N = 3}$$

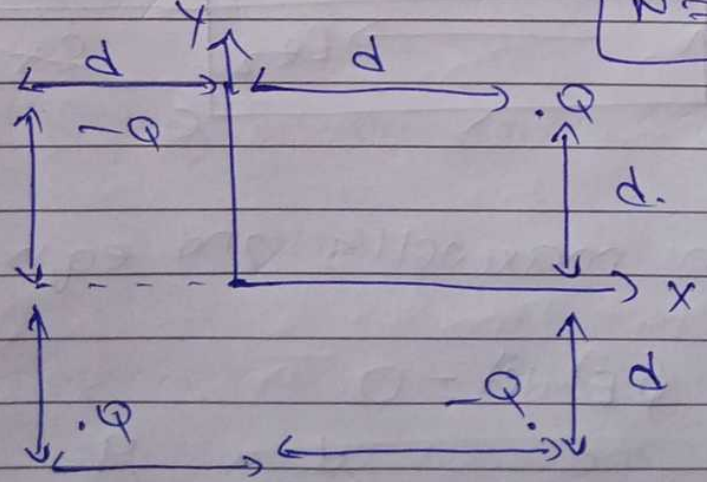

Boundary condition for electric field

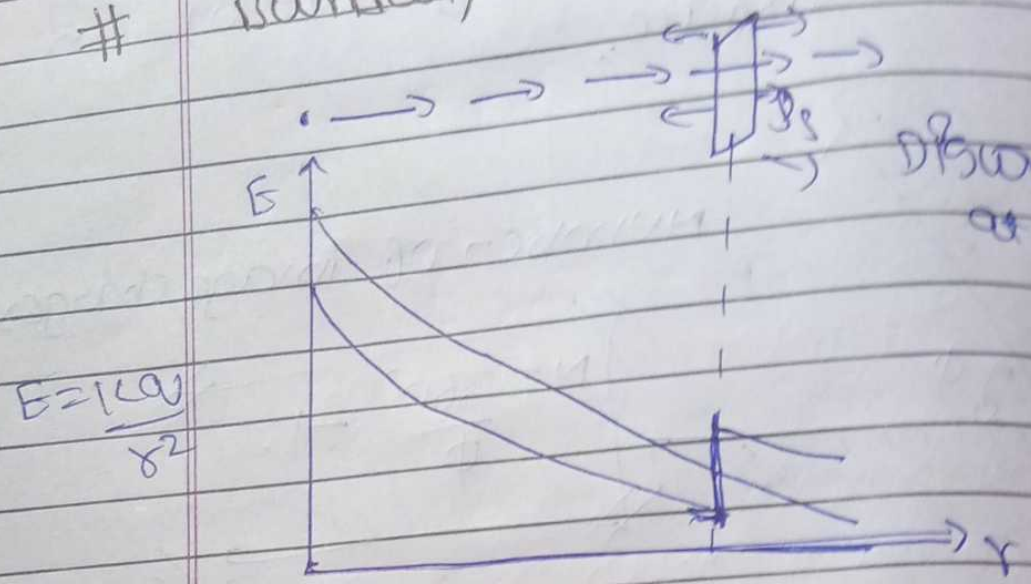


Discontinuity at this point

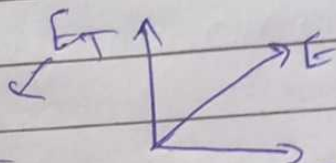

tangent component

→ normal compo

i) Tangent components

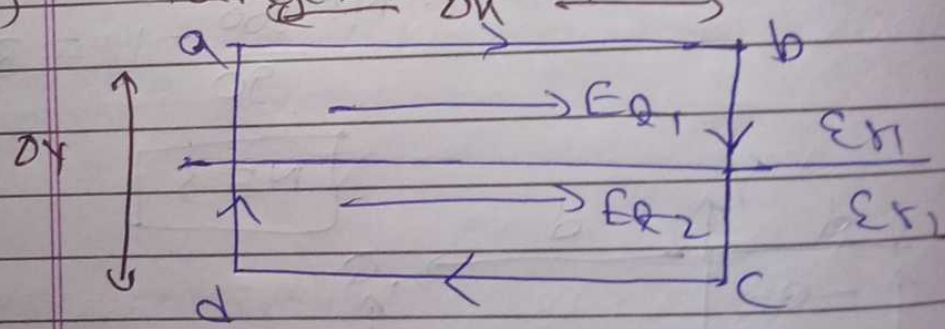

From maxwell's 2nd eqn

$$\oint \vec{E} \cdot d\vec{l} = 0.$$

$$\int_a^b E\,dl + \int_b^c E\,dl + \int_c^d E\,dl + \int_d^a E\,dl = 0$$

$$E_{\theta_1}\,\delta x + 0 - E_{\theta_2}\,\delta x + 0 = 0$$

$$\Delta N (E_{t1} - E_{t2}) = 0.$$

$$E_{t1} = E_{t2}$$

Electric field is continuous for tangential components.


Now,

$$\vec{D} = \varepsilon_r \varepsilon_0 \vec{E}$$

$$\frac{D_{t1}}{\varepsilon_{r1}} = \frac{D_{t2}}{\varepsilon_{r2}}$$

$$\frac{D_{t1}}{D_{t2}} = \frac{\varepsilon_{r1}}{\varepsilon_{r2}}$$

(ii) Normal components.

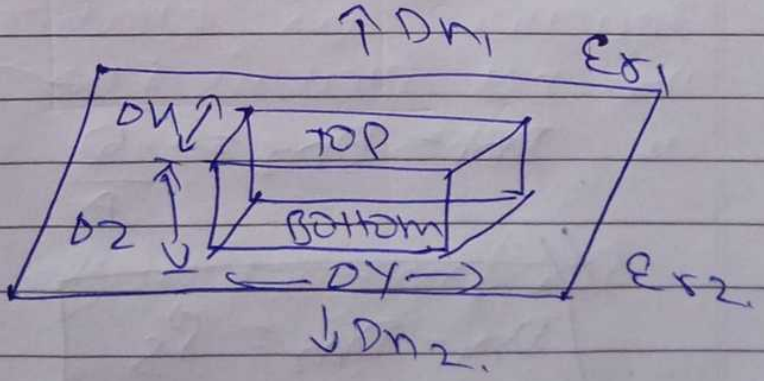

From maxwell's 1st equation

$$\oint \vec{E} \cdot d\vec{s} = \frac{Q}{\varepsilon_0}$$

$$\oint \vec{D} \cdot d\vec{s} = Q$$

$$\int_{\text{TOP}} \vec{D} \cdot d\vec{s} + \int_{\text{BOTTOM}} \vec{D} \cdot d\vec{s} + \int_{\text{left}} D \cdot ds + \int_{\text{Right}} D \cdot ds$$

$$+ \int_{\text{back}} D \cdot ds + \int_{\text{point}} D \cdot ds = Q$$


$\rightarrow$ top $\qquad$ $\rightarrow$ bottom

$$D_{n_1}(\Delta y \Delta x) - D_{n_2}(\Delta y \Delta x) = Q$$

$$\Delta y \Delta x (D_{n_1} - D_{n_2}) = Q$$

$$D_{n_1} - D_{n_2} = \frac{Q}{\Delta y \Delta x} \quad \left\{ \text{Area} \right.$$

$$D_{n_1} - D_{n_2} = \frac{Q}{A} \quad \left\{ \rho_s = \frac{Q}{A} \right.$$

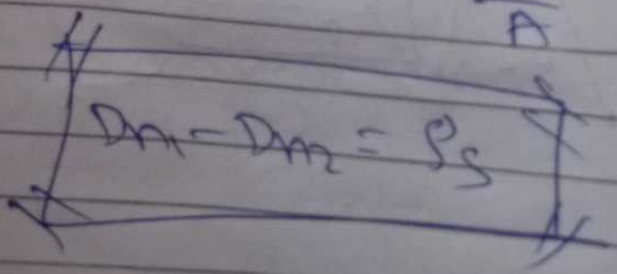

For conductor in free space.

