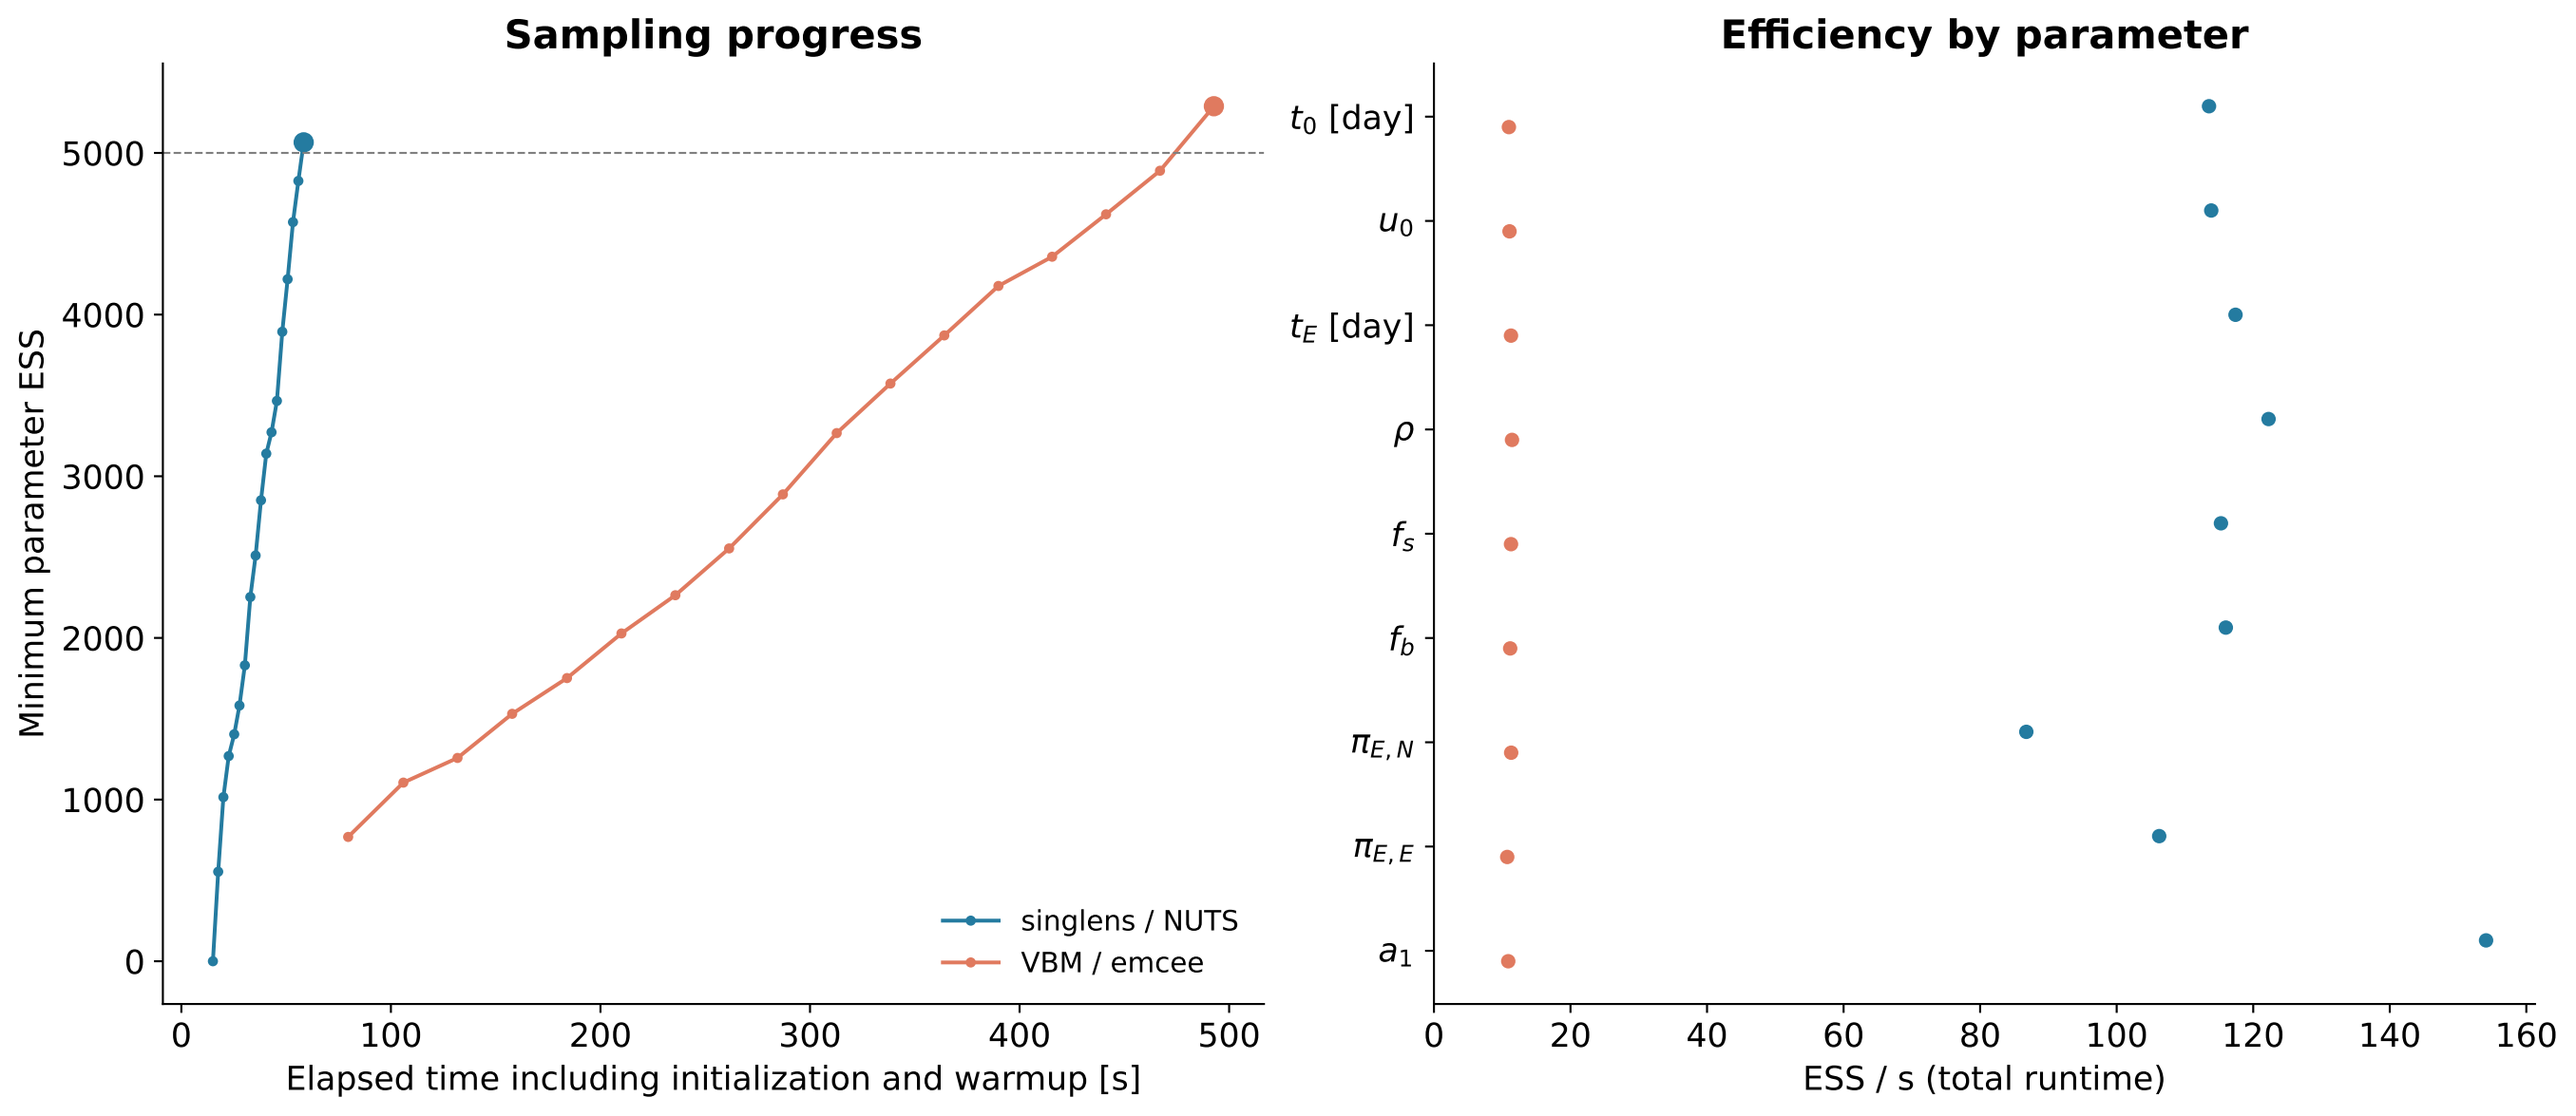
Sampling progress
Minimum parameter ESS
5000
4000
3000
2000
1000
0
0
100
200
300
400
500
Elapsed time including initialization and warmup [s]
singlens / NUTS
VBM / emcee
Efficiency by parameter
t_0 [day]
u_0
t_E [day]
ρ
f_s
f_b
$\pi_{E,N}$
$\pi_{E,E}$
a_1
0
20
40
60
80
100
120
140
160
ESS / s (total runtime)